



Hammond  
Power Solutions


GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX



LR 3902  
DRY TYPE  
TRANSFORMER  
774US  
E112313  
**LISTED**

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER  
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	460V				Cust. Ref. Réf. du client	
BIL	-				Serial No. No. de série	
TERM. BORNES	H1 H2 H3				Part No. No. de pièce	DM020JC
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	20
	483	23.9	105	1	TYPE	K
	460	25.1	100	2	Cooling Refroidissement	ANN
	437	26.4	95	3	Temp. Rise Echauffement	150 °C
					Temp. Class Classe de Temp.	220 °C
					Frequency Fréquence	60 Hz
					Impédance % @ 170 °C	5.7
LV/BT	230Y/133V				Encl. Type Type de boîtier	3R
BIL	-				Wt Poids lbs/kg	230/105
TERM. BORNES	X0 X1 X2 X3				Winding Enroulement	AL

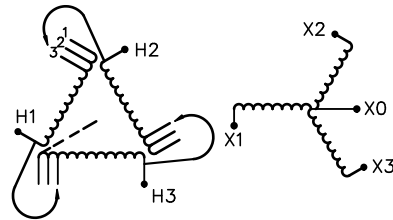

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 3 INCHES

d003102b



Hammond Power  
Solutions Inc.


TITLE: 3PH DRIVE TRANSFORMER  
NAMEPLATE INFORMATION

9	21/07/16	PP	EDB UPDATE	DES: CSUBRT
8	19/12/17	CS	NEW CROSS ADDED NOW TO DESIGN	DATE: 99/08/17
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBDM020JC

9.0 Jwan 2016/07/20/14:54

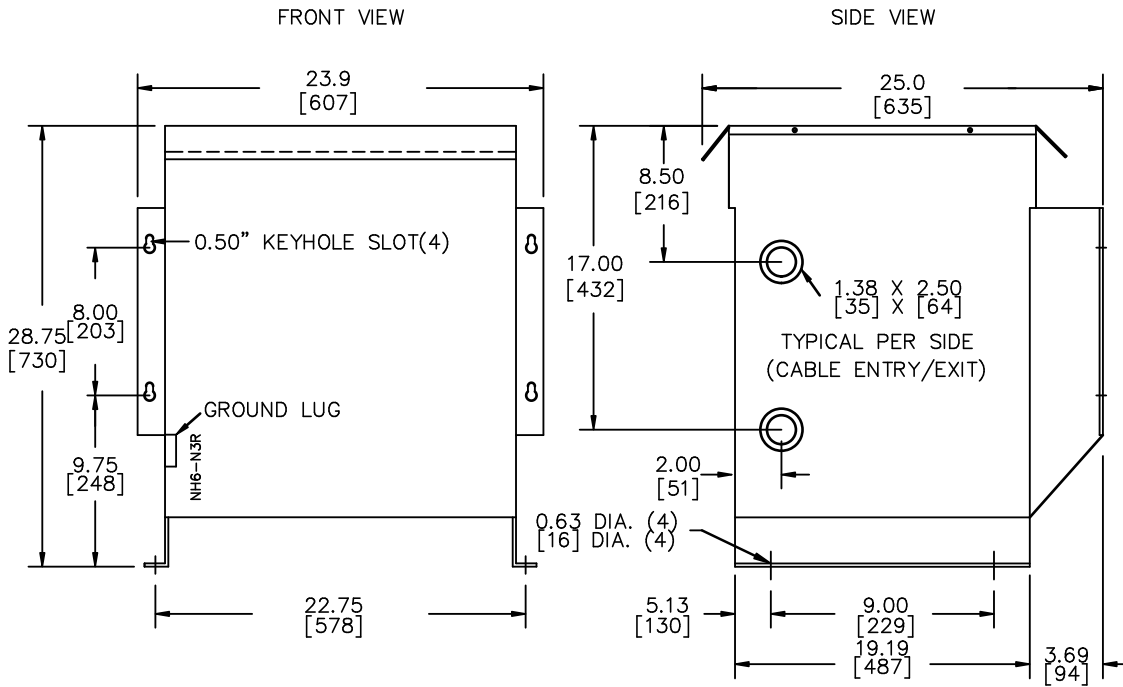

All Dimensions in inches[mm]

ENCLOSURE COLOR : ANSI 61 GREY - OUTDOOR

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED  
SUITABLE FOR #14-2 CU/AL  
CONDUCTORS  
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED  
SUITABLE FOR #14-2 CU/AL  
CONDUCTORS  
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

9	21/07/16	PP	EDB UPDATE	DES: CSUBRT
8	19/12/17	CS	NEW CROSS ADDED NOW TO DESIGN	DATE: 99/08/17
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM020JC

9.0 Jwen 2021/07/16 14:54