



Hammond
Power Solutions


GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX



LR 3902
DRY TYPE
TRANSFORMER
77JUS
E112313
LISTED

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	575V				Cust. Ref. Réf. du client	
BIL	-				Serial No. No. de série	
TERM. BORNES	H1 H2 H3				Part No. No. de pièce	DM075NN
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	75
	604	71.7	105	1	TYPE	K
	575	75.3	100	2	Cooling Refroidissement	ANN
	546	79.3	95	3	Temp. Rise Echauffement	150 °C
					Temp. Class Classe de Temp.	220 °C
					Frequency Fréquence	60 Hz
					Impédance % @ 170 °C	5.9
LV/BT	575Y/332V				Encl. Type Type de boîtier	3R
BIL	-				Wt lbs/kg	550/250
TERM. BORNES	X0 X1 X2 X3				Winding Enroulement	AL

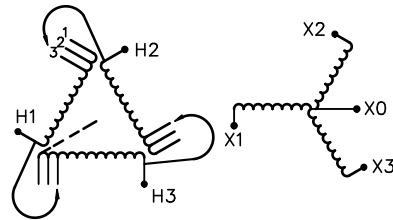

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 3 INCHES

d003102b



Hammond Power
Solutions Inc.



TITLE: 3PH DRIVE TRANSFORMER
NAMEPLATE INFORMATION

3	21/07/16	PP	EDB UPDATE	DES: MBURSAC
2	18/02/09	DC	UPDATED DWGS(HCN:67485)	DATE: 02/05/31
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBDM075NN

3.0 Jun 19/07/2015 15:05

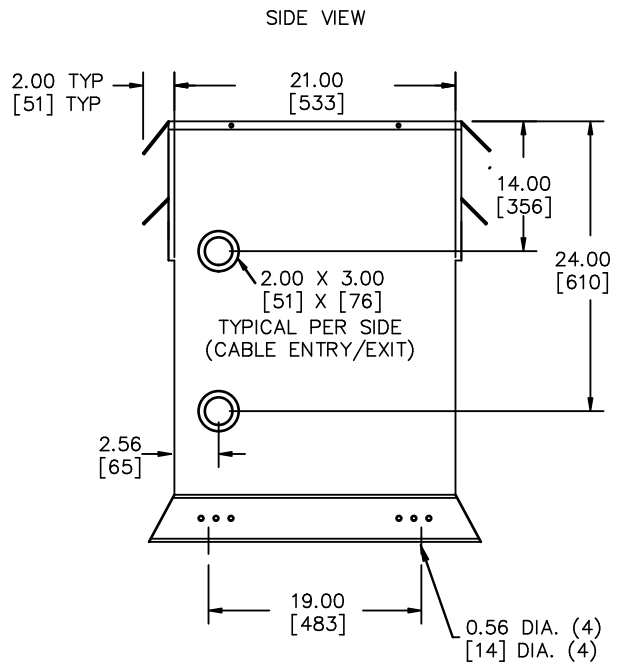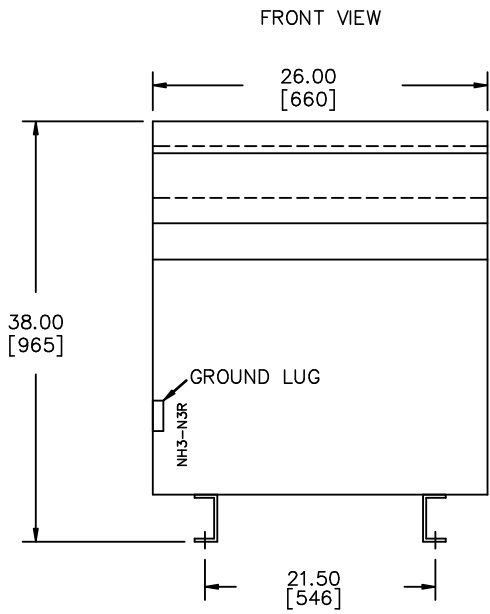

All Dimensions in inches[mm]

ENCLOSURE COLOR :ANSI 61 GREY- OUTDOOR

HV TERMINAL DETAIL

LV TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #2/0-14 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #2/0-14 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV TERMINATED AT TOP FRONT
- LV TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER				
3	21/07/16	PP	EDB UPDATE	DES: MBURSAC
2	18/02/09	DC	UPDATED DWGS(HCN:67485)	DATE: 02/05/31
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM075NN

3.0 Jwen 2021/07/16 15:05