



Hammond
Power Solutions

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX



LR 3902




DRY TYPE
TRANSFORMER
774US
E112313

LISTED

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	480V				Cust. Ref. Réf. du client	
BIL	-				Serial No. No. de série	
TERM. BORNES	H1 H2 H3				Part No. No. de pièce	DM220KKC
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	220
	504	252	105	1	TYPE	K
	492	258	102.5	2	Cooling Refroidissement	ANN
	480	265	100	3	Temp. Rise Echauffement	150 °C
	468	271	97.5	4	Temp. Class Classe de Temp.	220 °C
	456	279	95	5	Frequency Fréquence	60 Hz
LV/BT	480Y/277V				Impédance % @ 170 °C	4.2
BIL	-				Encl. Type Type de boîtier	3R
TERM. BORNES	X0 X1 X2 X3				Wt Poids lbs/kg	1400/636
					Winding Enroulement	CU

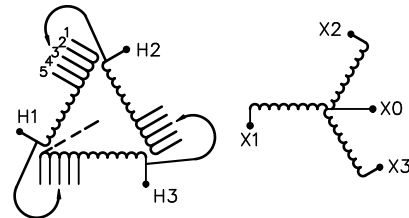

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 5 INCHES

d003102b



Hammond Power
Solutions Inc.



TITLE: 3PH DRIVE TRANSFORMER
NAMEPLATE INFORMATION

6	21/07/13	PP	EDB UPDATE	DES: MBURSAC
5	16/09/28	RM	CHANGED NPL VER:	DATE: 03/01/06
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBDM220KKC

0.0 wen (w) 13/07/2017 17:48

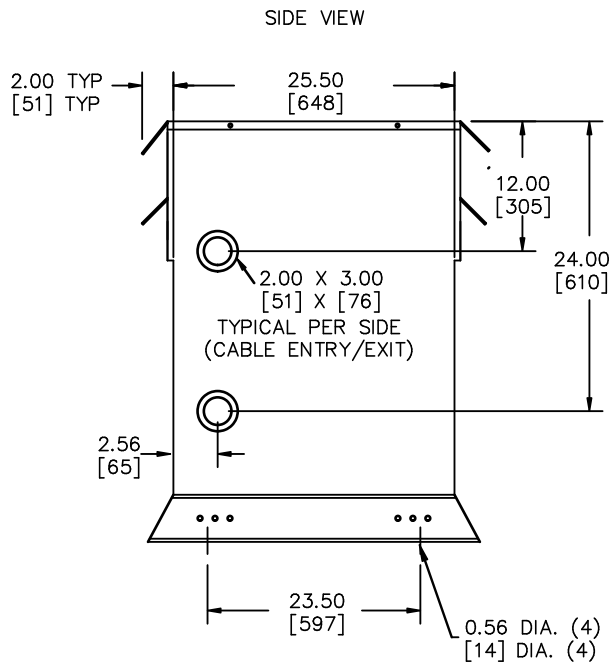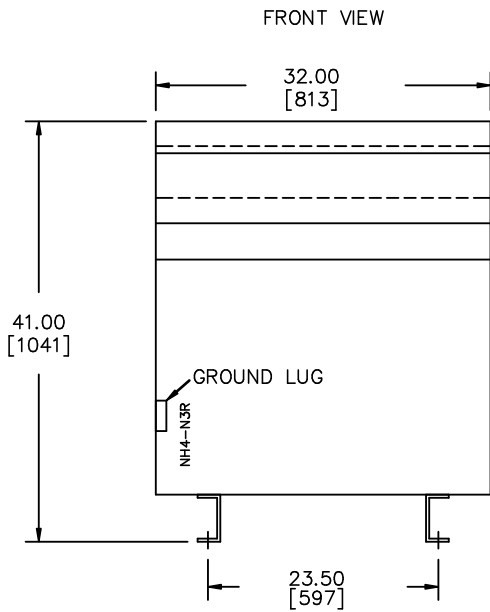

All Dimensions in inches[mm]

ENCLOSURE COLOR :ANSI 61 GREY – OUTDOOR

HV TERMINAL DETAIL

LV TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 350MCM-6 CU/AL
CONDUCTORS
2 CONDUCTORS PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 600MCM-2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV TERMINATED AT TOP FRONT
- LV TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER				
6	21/07/13	PP	EDB UPDATE	DES: MBURSAC
5	16/09/28	RM	CHANGED NPL VER:	DATE: 03/01/06
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM220KCC

6.0 Wen 2021/07/13 17:48