

Hub City™ Worm Gear Drives

Double Reduction

PowerCubeX® Worm Speed Reducer Catalog Ratings

2400 Series • GW130 Primary • W240 Secondary

SERIES	INPUT RPM	UNIT RATIO	OUTPUT RPM	PRIM. RATIO	SEC. RATIO	ALL	CONVENTIONAL OIL		PAO SYNTHETIC OIL		PAG SYNTHETIC OIL	
						INPUT HP	EFF. %	OUTPUT TORQUE	EFF. %	OUTPUT TORQUE	EFF. %	OUTPUT TORQUE
2400	1750	50	35.0	5	10	1.40	67.3	1698	75.6	1908	80.4	2029
		75	23.3	5	15	1.05	63.8	1809	71.7	2033	76.3	2161
		100	17.5	5	20	0.84	60.7	1833	68.2	2060	72.5	2190
		150	11.7	10	15	0.60	59.0	1901	66.3	2136	70.5	2271
		200	8.75	10	20	0.48	55.8	1923	62.7	2161	66.6	2297
		250	7.00	10	25	0.40	53.2	1892	59.8	2126	63.6	2260
		300	5.83	20	15	0.34	52.7	1942	59.2	2182	62.9	2320
		400	4.38	20	20	0.28	49.4	1964	55.6	2207	59.1	2346
		500	3.50	25	20	0.236	46.3	1964	52.0	2207	55.3	2346
		600	2.92	20	30	0.211	43.5	1986	48.9	2231	52.0	2373
		750	2.33	25	30	0.181	40.6	1986	45.7	2231	48.5	2373
		900	1.94	30	30	0.159	38.5	1986	43.3	2231	46.0	2373
		1000	1.75	50	20	0.144	38.0	1964	42.7	2207	45.4	2346
		1200	1.46	40	30	0.129	35.6	1986	40.0	2231	42.5	2373
		1500	1.17	50	30	0.111	33.0	1986	37.1	2231	39.4	2373
		1800	0.97	60	30	0.101	30.2	1986	33.9	2231	36.1	2373
		2000	0.88	50	40	0.092	29.4	1950	33.0	2191	35.1	2330
		2400	0.73	60	40	0.084	26.8	1950	30.1	2191	32.0	2330
		3000	0.58	60	50	0.070	24.5	1851	27.6	2080	29.3	2211
		3600	0.49	60	60	0.053	23.9	1640	26.8	1843	28.5	1959

2600 Series • 130 Primary • 260 Secondary

SERIES	INPUT RPM	UNIT RATIO	OUTPUT RPM	PRIM. RATIO	SEC. RATIO	ALL	CONVENTIONAL OIL		PAO SYNTHETIC OIL		PAG SYNTHETIC OIL	
						INPUT HP	EFF. %	OUTPUT TORQUE	EFF. %	OUTPUT TORQUE	EFF. %	OUTPUT TORQUE
2600	1750	50	35.0	5	10	1.38	67.7	1681	76.0	1889	80.8	2009
		75	23.3	5	15	1.28	65.7	2273	73.8	2554	78.5	2715
		100	17.5	5	20	1.09	62.1	2428	69.7	2728	74.1	2901
		150	11.7	10	15	0.72	61.1	2381	68.7	2675	73.0	2844
		200	8.75	10	20	0.62	57.1	2550	64.2	2865	68.3	3046
		250	7.00	10	25	0.50	54.9	2488	61.7	2796	65.6	2972
		300	5.83	20	15	0.41	54.8	2429	61.5	2729	65.4	2902
		400	4.38	20	20	0.36	50.9	2604	57.2	2926	60.8	3111
		500	3.50	25	20	0.30	47.6	2604	53.5	2926	56.9	3111
		600	2.92	20	30	0.25	46.8	2485	52.5	2792	55.8	2969
		750	2.33	25	30	0.210	43.7	2485	49.1	2792	52.2	2969
		900	1.94	30	30	0.185	41.5	2485	46.6	2792	49.6	2969
		1000	1.75	50	20	0.184	39.2	2604	44.0	2926	46.8	3111
		1200	1.46	40	30	0.150	38.4	2485	43.2	2792	45.9	2969
		1500	1.17	50	30	0.129	35.6	2485	40.0	2792	42.6	2969
		1800	0.97	60	30	0.117	32.7	2485	36.7	2792	39.1	2969
		2000	0.88	50	40	0.116	30.9	2585	34.7	2905	36.9	3088
		2400	0.73	60	40	0.106	28.2	2585	31.7	2905	33.7	3088
		3000	0.58	60	50	0.086	26.1	2435	29.3	2736	31.2	2909
		3600	0.49	60	60	0.072	24.3	2261	27.3	2540	29.0	2701

ADDITIONAL RATINGS FOR OTHER INPUT SPEEDS ARE AVAILABLE AT: WWW.HUBCITYINC.COM

OVERHUNG LOAD AND THRUST LOAD INFORMATION

OVERHUNG LOAD - LOW SPEED SHAFT — MODELS 2401 AND 2404 1400 LBS. AT CENTER POINT OF SHAFT EXTENSION. MODELS 2402 AND 2405 NOT APPLICABLE. THRUST± UP OR DOWN 1450 LBS.

MODELS 2601 AND 2604 1150 LBS. AT CENTER POINT OF SHAFT EXTENSION. MODELS 2602 AND 2605 NOT APPLICABLE. THRUST± UP OR DOWN 1000 LBS.


±OHL AND THRUST VALUES SHOWN ARE INDEPENDENT FUNCTIONS AND CANNOT BE APPLIED SIMULTANEOUSLY. REFER APPLICATIONS WITH COMBINED OHL AND THRUST TO REGAL CUSTOMER SERVICE DEPARTMENT.

OUTPUT TORQUE VALUES SHOWN ARE INCH-POUNDS (IN-LB).

Hub City™ Worm Gear Drives

Double Reduction Models

1301, 1501, 1801, 2101, 2401, 2601, 3001, 3201, 3801, 4201, 4501, 5201, GW6001, GW7001, GW8001, GW10001

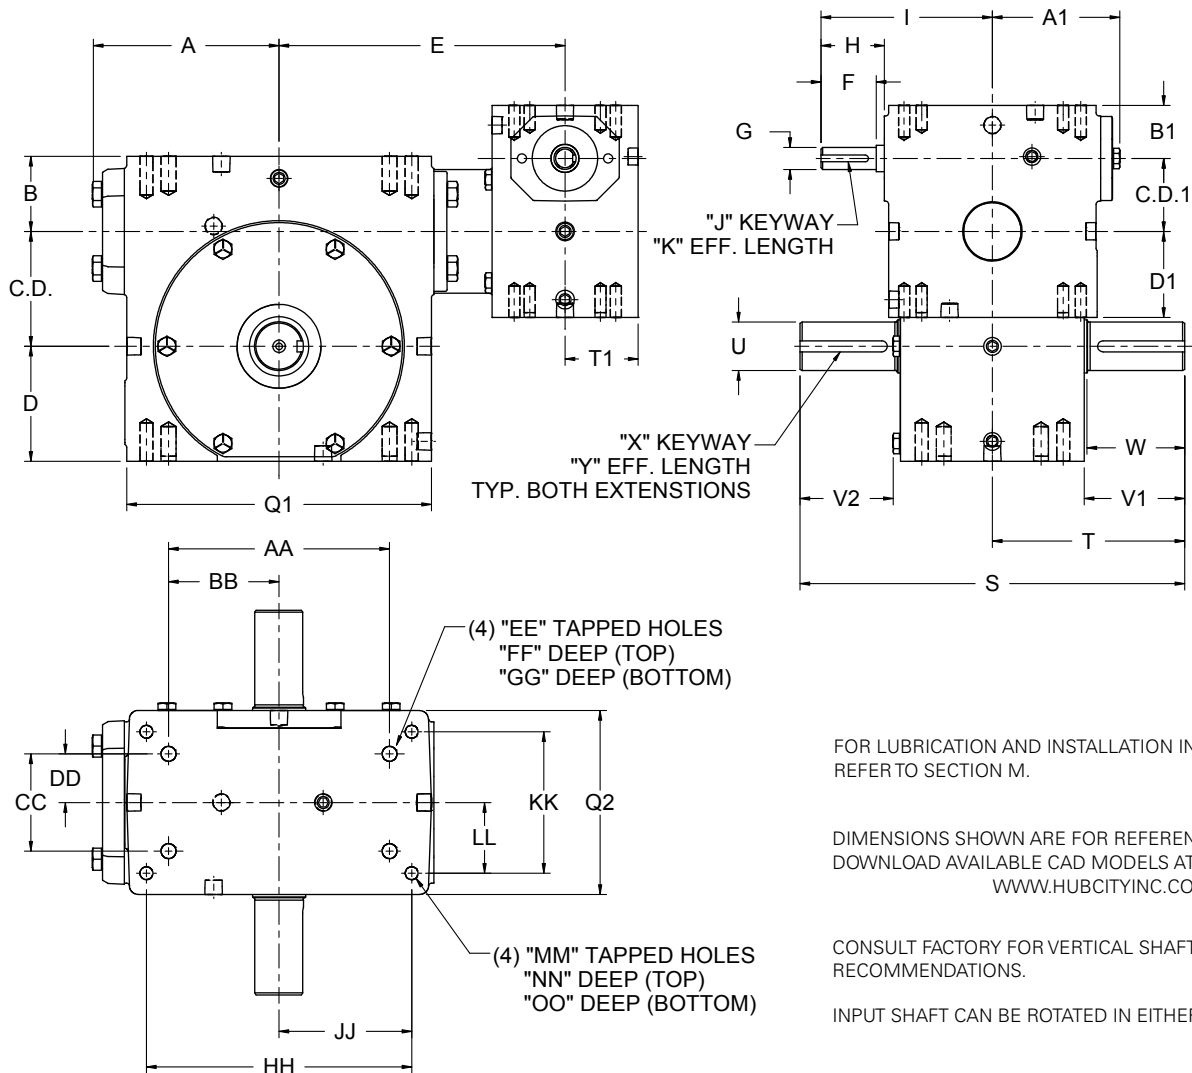


FOR LUBRICATION AND INSTALLATION INSTRUCTIONS REFER TO SECTION M.

DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.
DOWNLOAD AVAILABLE CAD MODELS AT:
WWW.HUBCITYINC.COM

CONSULT FACTORY FOR VERTICAL SHAFT LUBRICATION RECOMMENDATIONS.

INPUT SHAFT CAN BE ROTATED IN EITHER DIRECTION.

Standard Styles Available

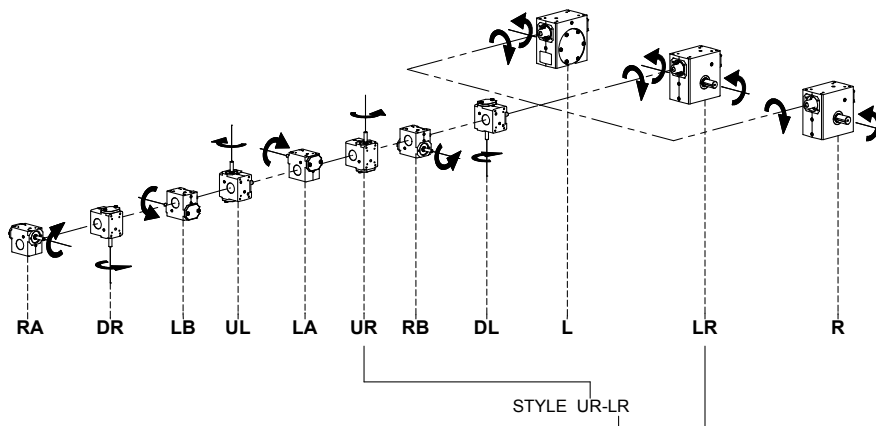

Hub City™ Worm Gear Drives

Double Reduction Models

1301, 1501, 1801, 2101, 2401, 2601, 3001, 3201, 3801, 4201, 4501, 5201, GW6001, GW7001, GW8001, GW10001

MODEL	PRIMARY	SECONDARY	C.D.	A	B	D	Q1	Q2	E	T1	C.D.1	A1	B1	D1
1301	131	134-56C	1.334	2.61	1.186	1.562	4.12	3.12	4.87	1.56	1.334	2.61	1.186	1.562
1501	GW131	154	1.541	3.14	1.928	1.906	4.88	3.44	5.85	1.84	1.334	2.61	1.610	1.720
1801	131	184-56C	1.751	3.23	1.374	1.875	5.16	3.44	5.50	1.56	1.334	2.61	1.186	1.562
2101	131	214-56C	2.064	3.61	1.500	2.437	5.88	4.12	5.87	1.56	1.334	2.61	1.186	1.562
2401	GW131	244	2.376	3.77	2.061	2.500	6.12	4.06	6.44	1.84	1.334	2.61	1.610	1.720
2601	131	264-56C	2.626	4.33	1.874	2.938	7.20	4.50	6.58	1.56	1.334	2.61	1.186	1.562
3001	GW181	304	3.001	4.84	2.624	3.250	8.12	5.25	7.86	1.78	1.750	3.24	1.940	2.060
3201	211	324-143TC	3.251	5.28	2.124	3.250	8.62	5.20	8.09	2.06	2.064	3.61	1.500	2.437
3801	211	384-143TC	3.751	4.90	2.374	3.937	9.60	5.62	8.61	2.06	2.064	3.61	1.500	2.437
4201	GW211	424	4.251	6.10	2.686	4.438	10.25	6.13	9.18	1.91	2.060	3.61	2.020	2.280
4501	321	454-213TC	4.501	5.23	2.499	4.625	9.25	4.63	9.14	2.60	3.251	5.28	2.124	3.250
5201	321	524-213TC	5.168	5.98	2.624	5.375	10.75	5.06	9.89	2.60	3.251	5.28	2.124	3.250
GW6001	GW321	GW601	6.000	N/A	4.000	6.500	14.25	8.13	13.30	2.88	3.250	5.02	2.630	3.500
GW7001	GW321	GW701	7.000	N/A	4.320	7.590	14.88	7.63	12.96	2.88	3.250	5.02	2.630	3.500
GW8001	GW421	GW801	8.000	N/A	4.100	8.860	17.00	8.63	13.94	3.07	4.250	6.10	2.690	4.440
GW10001	GW451	GW1001	10.000	N/A	5.110	10.360	20.88	9.53	17.05	3.60	5.250	7.50	3.630	5.120

MODEL	F	G	H	I	J	K	S	T	U	V1	V2	W	X	Y
1301	1.67	.500/.4985	1.76	3.82	1/8 X 1/16 P&W	1.44	6.50	3.25	.625/.624	1.69	1.53	1.60	3/16 X 3/32	1.38
1501	1.67	.500/.4986	1.76	3.82	1/8 X 1/16 P&W	1.44	8.62	4.31	.750/.7485	2.11	1.90	2.08	3/16 X 3/32	1.51
1801	1.67	.500/.4985	1.76	3.82	1/8 X 1/16 P&W	1.44	7.00	3.50	.750/.749	1.78	1.57	1.54	3/16 X 3/32	1.41
2101	1.67	.500/.4985	1.76	3.82	1/8 X 1/16 P&W	1.44	8.50	4.25	.875/.874	2.19	1.98	1.95	3/16 X 3/32	1.83
2401	1.67	.500/.4985	1.76	3.82	1/8 X 1/16 P&W	1.44	10.28	5.14	1.125/1.1235	2.66	2.44	2.62	1/4 x 1/8	1.76
2601	1.67	.500/.4985	1.76	3.82	1/8 X 1/16 P&W	1.44	9.00	4.50	1.250/1.249	2.25	2.04	N/A	1/4 x 1/8	1.85
3001	N/A	.625/.6235	1.76	4.45	3/16 X 3/32	1.38	13.50	6.75	1.250/1.2485	3.60	3.36	3.57	1/4 X 1/8	2.26
3201	N/A	.625/.6235	1.76	4.82	3/16 X 3/32 P&W	1.50	10.88	5.44	1.375/1.374	2.84	2.62	2.75	5/16 X 5/32	2.31
3801	N/A	.625/.6235	1.76	4.82	3/16 X 3/32 P&W	1.50	13.38	6.69	1.500/1.499	3.88	N/A	N/A	3/8 X 3/16	3.16
4201	N/A	.625/.6235	1.76	4.82	3/16 X 3/32	1.38	16.24	8.12	1.875/1.8735	4.50	4.21	4.47	1/2 X 1/4	3.06
4501**	N/A	.875/.8735	2.38	6.75	3/16 X 3/32 P&W	1.75	14.50	7.25	1.625/1.624	4.18	N/A	3.90	3/8 X 3/16	3.28
5201***	N/A	.875/.8735	2.38	6.75	3/16 X 3/32 P&W	1.75	15.62	7.81	1.750/1.749	4.47	N/A	4.17	3/8 X 3/16	3.50
GW6001	N/A	.875/.8735	2.38	6.76	3/16 X 3/32 P&W	1.63	20.00	10.00	2.500	4.65	4.65	N/A	5/8 X 5/16 P&W	4.00
GW7001	N/A	.875/.8735	2.38	6.76	3/16 X 3/32 P&W	1.63	23.52	11.76	2.750	5.65	5.65	N/A	5/8 X 5/16 P&W	4.00
GW8001	N/A	1.250/1.2485	3.47	9.57	1/4 X 1/8	2.50	24.50	12.25	3.000	5.98	5.98	5.26	3/4 X 3/8 P&W	4.50
GW10001	N/A	1.250/1.2485	3.38	10.88	1/4 X 1/8	3.00	29.50	14.75	3.750	6.76	6.76	6.39	7/8 X 7/16 P&W	5.00

** ALSO AVAILABLE WITH 1.750/1.749 (U) DIAMETER OUTPUT SHAFT. CONSULT FACTORY.

*** ALSO AVAILABLE WITH 2.000/1.999 (U) DIAMETER OUTPUT SHAFT. CONSULT FACTORY.

MODEL	AA	BB	CC	DD	EE	FF	GG	HH	JJ	KK	LL	MM	NN	OO	WT. LBS.
1301	2.250	1.125	1.625	0.813	1/4 UNC	0.50	0.50	3.250	1.625	2.000	1.000	5/16 UNC	0.50	0.50	22
1501	4.188	2.094	2.750	1.375	5/16 UNC	0.63	0.63	N/A	N/A	N/A	N/A	N/A	N/A	N/A	25
1801	3.125	1.563	1.625	0.813	1/4 UNC	0.50	0.50	4.188	2.094	2.750	1.375	5/16 UNC	0.63	0.63	25
2101	4.000	2.000	2.000	1.000	3/8 UNC	0.50	0.70	5.000	2.500	2.875	1.438	3/8 UNC	0.70	0.70	32
2401	5.000	2.500	2.875	1.438	3/8 UNC	0.69	0.69	N/A	N/A	N/A	N/A	N/A	N/A	N/A	48
2601	4.875	2.438	2.688	1.344	3/8 UNC	0.70	0.70	6.375	3.188	3.375	1.688	3/8 UNC	0.70	0.70	47
3001	7.000	3.500	4.000	2.000	7/16 UNC	0.88	0.88	N/A	N/A	N/A	N/A	N/A	N/A	N/A	77
3201	6.250	3.125	2.750	1.375	1/2 UNC	0.75	0.75	7.500	3.750	4.000	2.000	7/16 UNC	0.88	0.88	85
3801	6.875	3.438	3.000	1.500	1/2 UNC	0.94	1.00	8.500	4.250	4.750	2.375	1/2 UNC	1.00	1.00	115
4201	8.500	4.250	5.000	2.500	5/8 UNC	1.00	1.00	N/A	N/A	N/A	N/A	N/A	N/A	N/A	132
4501	8.125	4.063	3.250	1.625	5/8 UNC	0.88	1.13	N/A	N/A	N/A	N/A	N/A	N/A	N/A	172
5201	9.500	4.750	3.750	1.875	5/8 UNC	1.00	1.25	N/A	N/A	N/A	N/A	N/A	N/A	N/A	198
GW6001	12.750	6.375	6.380	3.190	5/8 UNC	1.00	1.00	N/A	N/A	N/A	N/A	N/A	N/A	N/A	402
GW7001	12.500	6.250	5.500	2.750	1 UNC	1.56	1.56	N/A	N/A	N/A	N/A	N/A	N/A	N/A	478
GW8001	14.250	7.125	6.500	3.250	1 UNC	1.66	1.66	N/A	N/A	N/A	N/A	N/A	N/A	N/A	718
GW10001	17.750	8.875	6.875	3.438	1-1/4 UNC	2.04	2.04	N/A	N/A	N/A	N/A	N/A	N/A	N/A	1136