





Justrite Safety Group

511 - MARBLE-TUFF™


PRODUCT INFORMATION BROCHURE

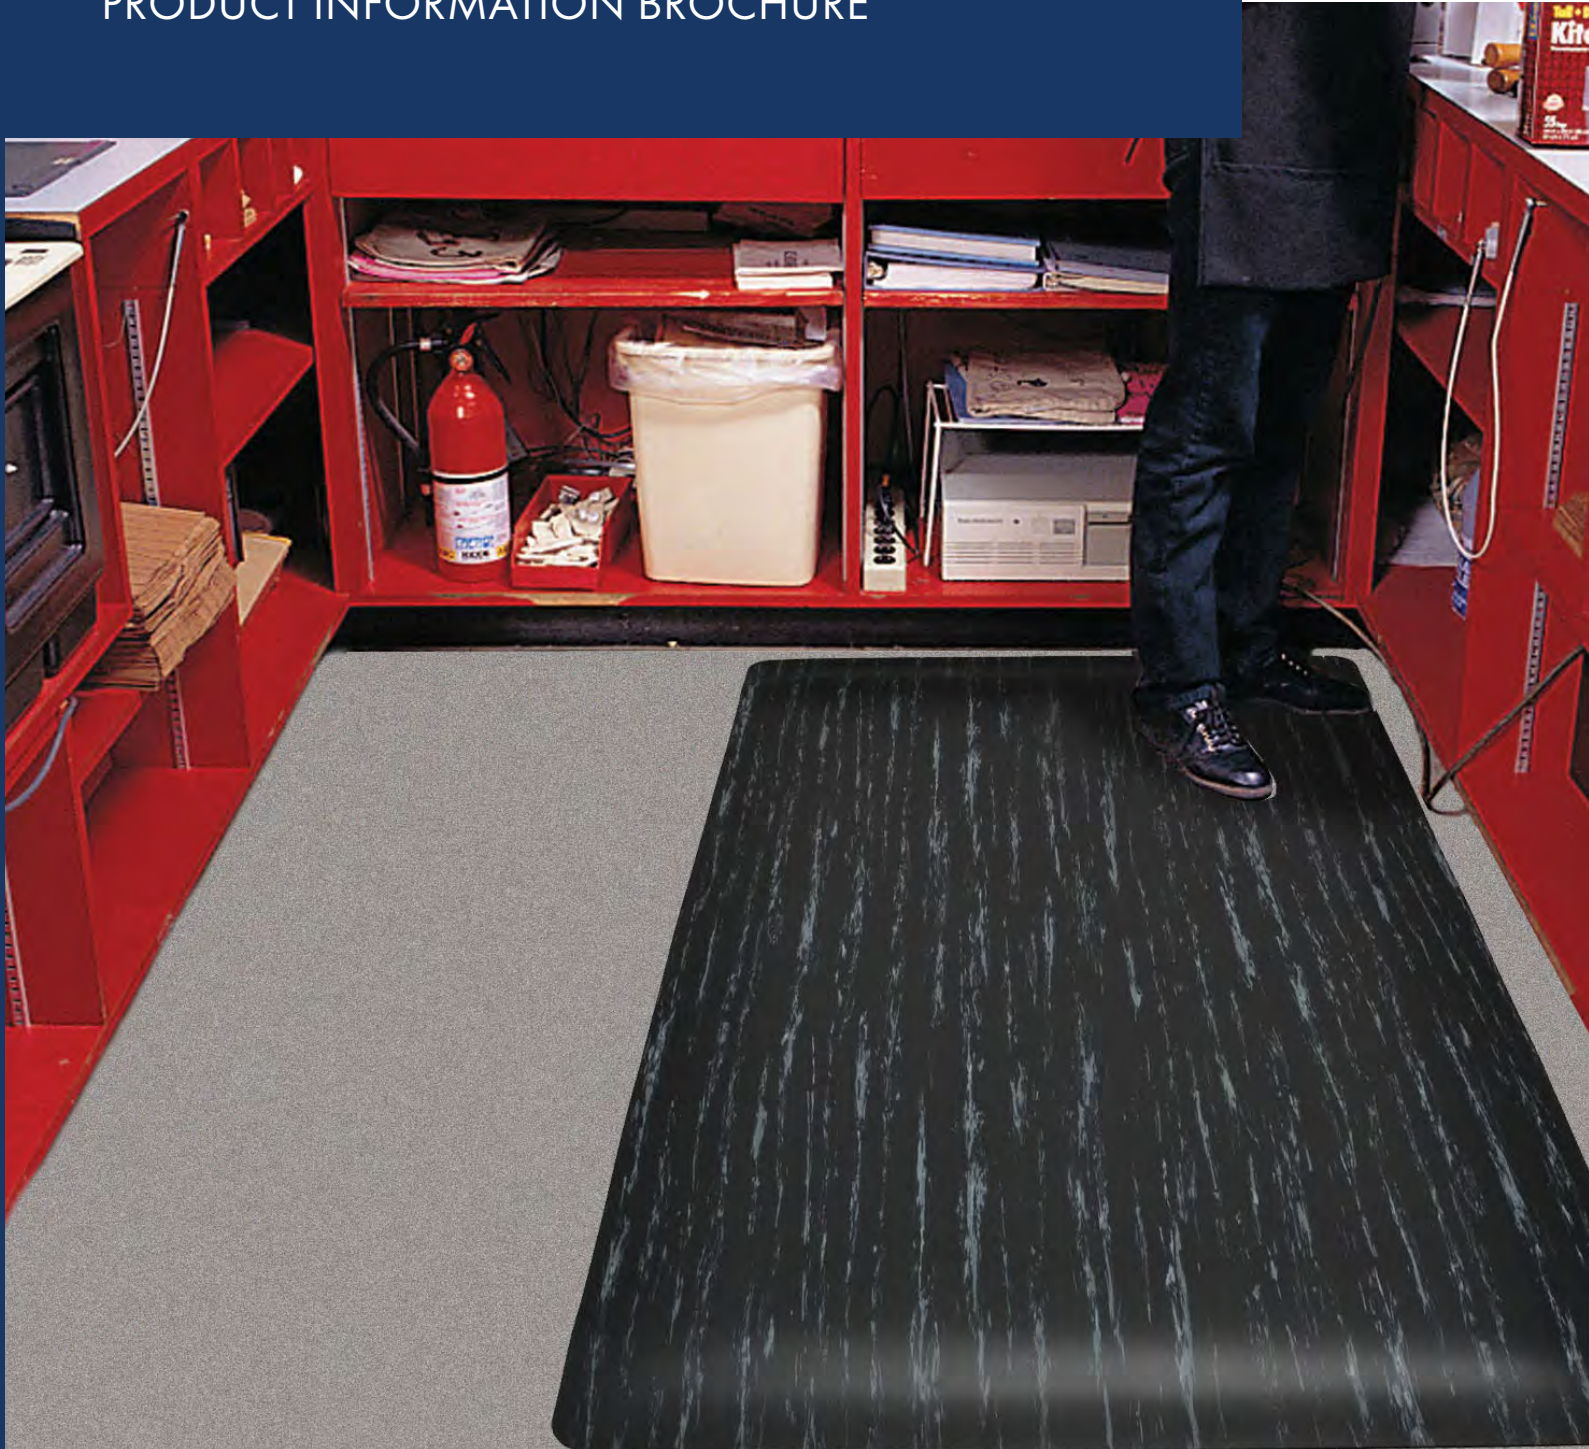

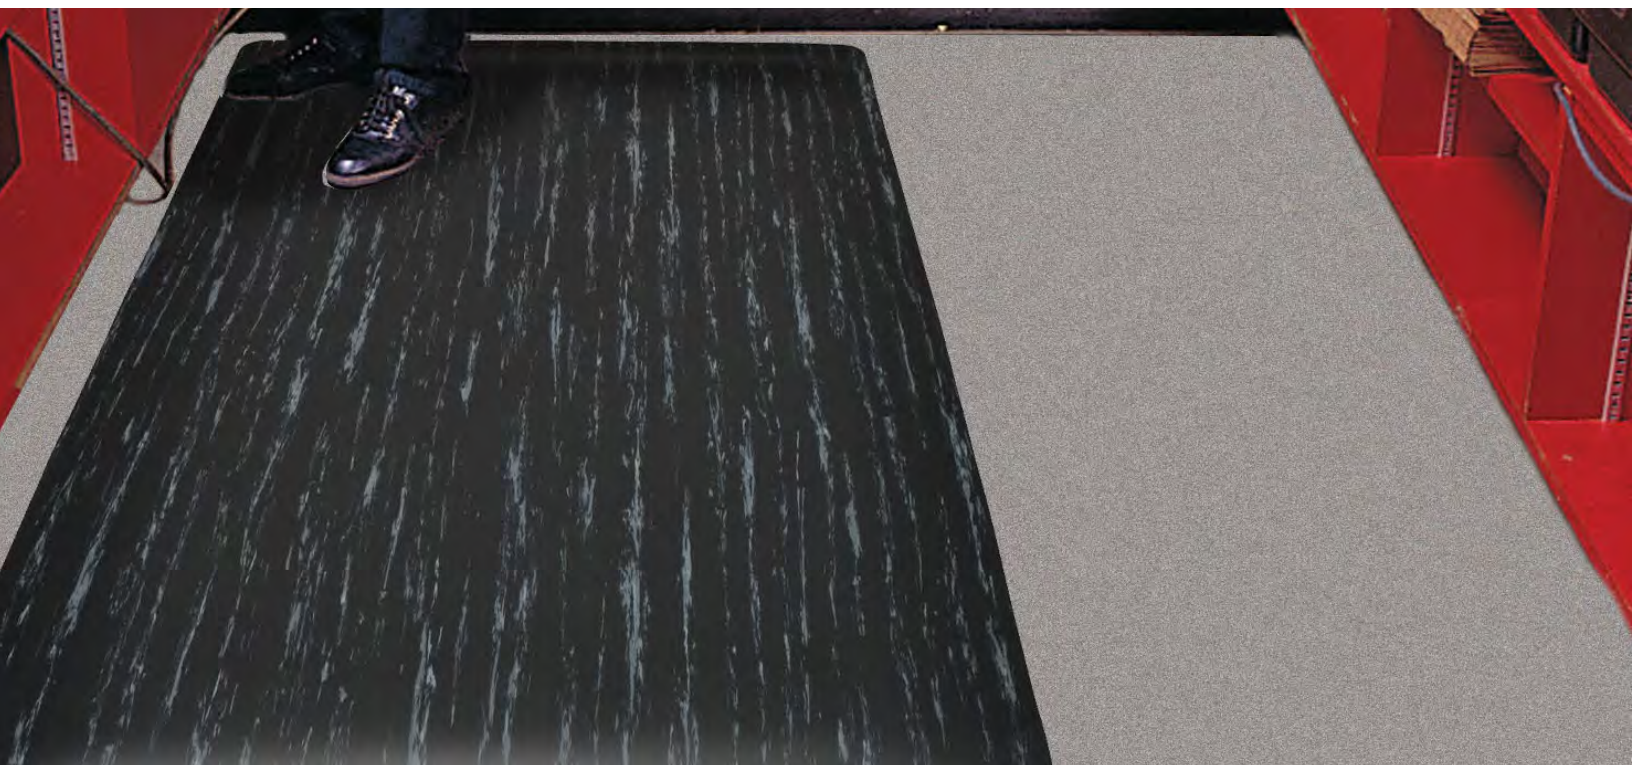

For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

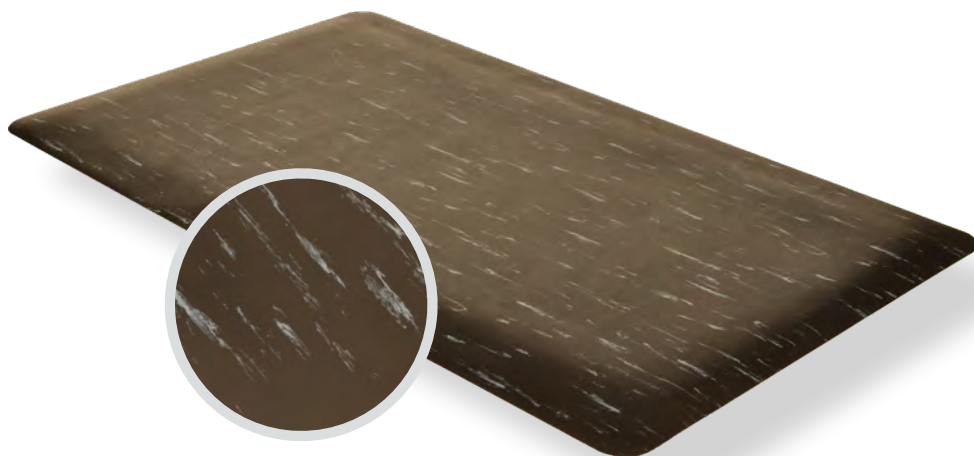


511 - MARBLE-TUFF™ is an anti-fatigue floor mat provides comfort and ergonomic support and complements any décor with a stylish smooth marble-pattern design. The durable vinyl top surface is easy to sweep clean or damp mop and is combined with a dense closed cell foam base. The sloped beveled edges reduce tripping hazards and allow easy access on and off the mat.

Material: Vinyl Surface With Dense Closed PVC Foam Base

Features and Benefits:

- Durable smooth marble-pattern top surface of heavy-duty vinyl
- Dense closed cell PVC foam base provides added cushioning comfort
- Smooth attractive surface easy to sweep clean
- Beveled edges on all 4 sides

WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov

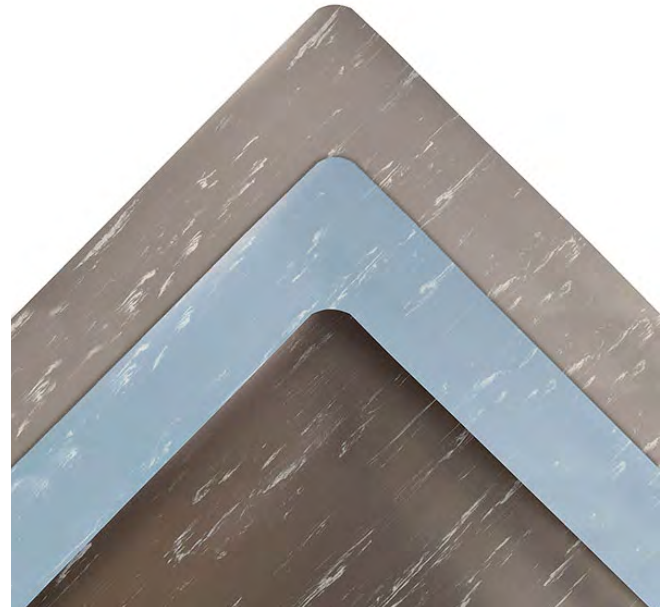

MODEL: 511

SPECIFICATIONS


Stock Sizes	2'x3', 3'x5', 3'x12'		
Roll Sizes	2'x75', 3'x75', 4'x75'		
Thickness	1/2"		
Colors	 Black	 Blue	 Grey

Performance:

	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

APPLICATIONS

- Lab Testing Areas
- Check-Out Counters
- Order Fulfillment lines.

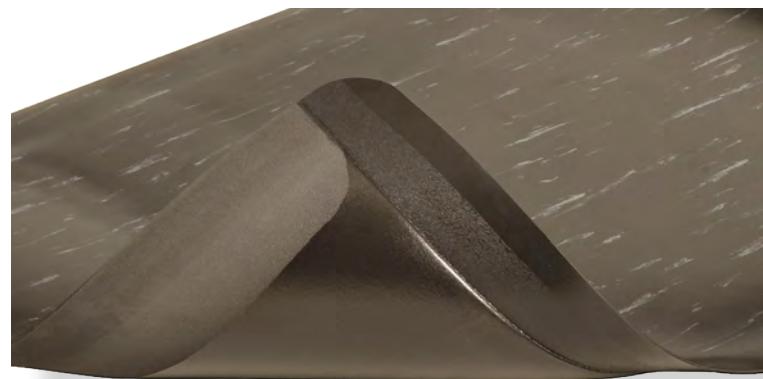

Cut Lengths



Anti-Fatigue



Insulation

TESTING DATA

Test	Test Description	Results
ASTM C-1028-96	Static Coefficient of Friction	Dry: 0.76
-	Compression Deflection	@ 20 lbs/in ² : 0.149 @ 40 lbs/in ² : 0.224
ASTM D-1004-94a-03	Tear Strength	35.7 lbs
ASTM D-2240	Durometer (Shore A)	85
ASTM D-3884	Abrasion Resistance	@ 500 cycles: 0.14% @ 1000 cycles: 0.21%
ASTM D-2859/CPSC FF-170	Surface Flammability/Carpets and Rugs	Pass
ASTM D-1894-01	Modified Slip Test: Avg. C.O.F. (Coefficient of Friction)	VCT: 1.800 Painted Concrete: 2.000 Vinyl Flooring: 1.500 Epoxy Painted Concrete: 1.700
ASTM D-903-98	Delamination	2.9 lbs/in

* Testing performed by an independent test laboratory.

NOTRAX®

5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com



A PRODUCT OF:



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.