



523 - MODULAR LOK-TYLE™




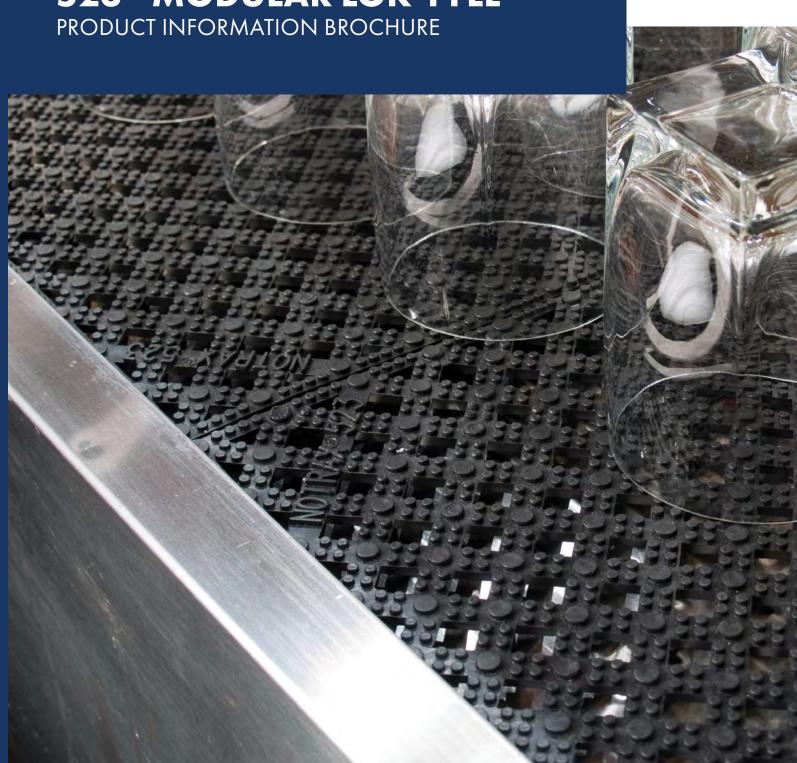

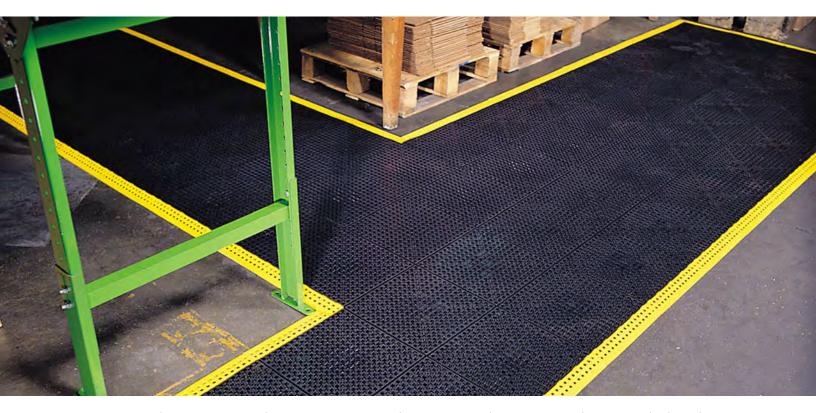

For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- Track record of manufacturing high quality mats for over seventy years
- All products are manufactured in ISO certified facilities
- Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries




523 - MODULAR LOK-TYLE™ allows moisture and debris to drain from the surface and aids traction. The modular cross-hatch vinyl tiles snap together on-site for custom configurations. Its lightweight, modular design allows for additional use as shelf liners in food prep and bar areas.

Material: PVC

Features and Benefits:

- Lightweight PVC, modular, drainage tiles
- Raised diamonds on top surface facilitates drainage and aids traction
- Modular for any configuration
- 100% recycled PVC (Black only)
- NSF tested and certified (as shelf liners)
- Beveled ramps and corners available

WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov



MODEL: 523


SPECIFICATIONS

Sizes	12"x12" T	ile, 2"x12" F	Ramp, 2"x2	" Corners
Thickness	1/2"			
Colors	Black	Green	Blue	Yellow

Performance:

Wear Resistance Anti-fatigue Performance Slip Resistance





Locker Rooms Shower Areas Shelving Bar Areas











APPLICATIONS









Processing Se

Food Service

Anti-Slip

g Custo

Drainage C

Resistant

TESTING DATA

Test	Test Description	Results
Compression Deflection	Test specimen is subjected to varying compression load levels and the resulting deflection was measured. The greater the deflection, the better the anti-fatigue properties. (Inches)	.143" (40 lbs/sq. inch)
Coefficient of Friction ASTM C1028-96	A neolite heel assembly with a predetermined load is pulled horizontally with a dynamometer to measure the force required to cause the assembly to slip.	.71

^{*}Testing performed by an independent test laboratory.

NOTRAX®

5655 West 73rd Street Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com





Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.