



Justrite Safety Group


539 - WEBTRAX®
PRODUCT INFORMATION BROCHURE





For over 70 years, the name Notrax[®] has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax[®] offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax[®] offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

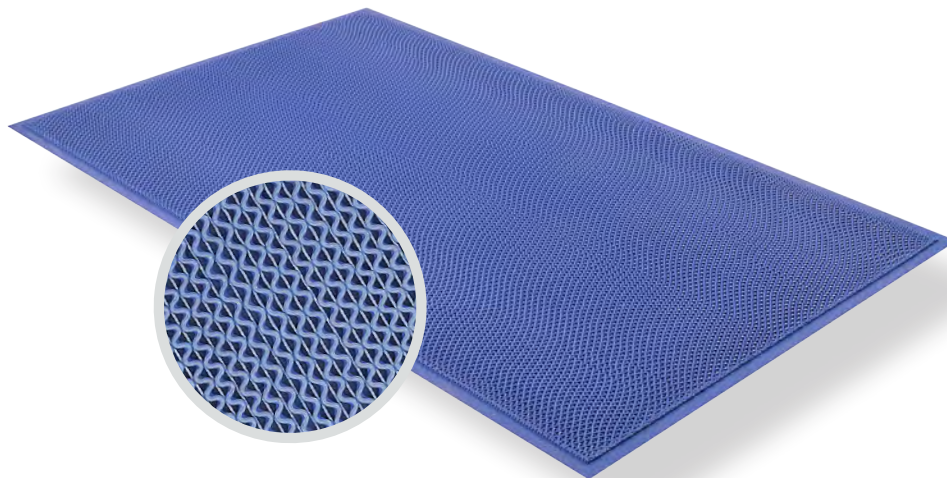


539 - WEBTRAX® is a multi-functional vinyl floor mat that can be used in a variety of wet applications. The wave pattern design creates a slip-resistant walking surface that increases traction on wet and slippery floors. Antibacterial treated PVC material prevents the growth of fungi or bacteria while the open structure design allows for easy draining of liquids. The industrial grade PVC compound also provides greater resistance to caustic chemicals, oils, and greases.

Material: PVC

Features and Benefits:

- Industrial grade extruded PVC
- Open construction of extruded vinyl has a waved design that creates a slip-resistant walking surface
- Oil and grease resistant
- Ultra violet resistant
- Performs well in different climates and adapts to any surface
- Free of: DOP, DMF, silicone, heavy metal, ozone depleting substances
- Factory compressed borders

⚠ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov

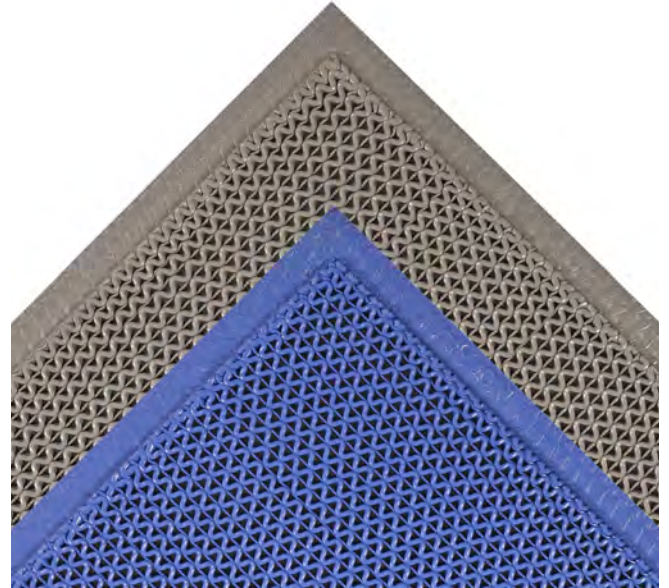

MODEL: 539

SPECIFICATIONS

Stock Sizes	3'x5'
Roll Sizes	3'x40', 4'x40'
Thickness	7/16"
Cut Lengths	3' and 4' widths (up to 40' long)
Colors	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  Blue </div> <div style="text-align: center;">  Grey </div> </div>

Performance:

	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

APPLICATIONS

- Pool Decks
- Saunas
- Shower Facilities
- Industrial Areas



TESTING DATA

Test	Test Description	Results
ASTM C-1028-96	Static Coefficient of Friction	Dry: 0.78 Wet: 0.58
-	Compression Deflection	@ 20 lbs/in2: 0.040 @ 40 lbs/in2: 0.051
ASTM D-1004-94a-03	Tear Strength	23.9 lbs
ASTM D-2240	Durometer (Shore A)	75
ASTM D-3884	Abrasion Resistance	@ 500 cycles: 0.18% @ 1000 cycles: 0.31%
ASTM D-2859/CPSC FF-170	Surface Flammability/Carpets and Rugs	Pass
ASTM E-648	Critical Radiant Flux	Watts per Cm2: 0.17
Watts per Cm2: 0.17	Modified Slip Test: Avg. C.O.F. (Coefficient of Friction)	VCT: 0.84 Painted Concrete: 0.50 Vinyl Flooring: 0.98 Epoxy Painted Concrete: 0.46
ASTM D-412	Breaking Load & Elongation	Breaking Load - 66.63 lbs/in2 Elongation - 145.4%
	Colorfastness to Light	4 - 5, Slight to Negligible Change
ASTM G21	Fungal Resistance	No Growth After 28 Days

*Testing performed by an independent test laboratory.

NOTRAX®

5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com



A PRODUCT OF:



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.