

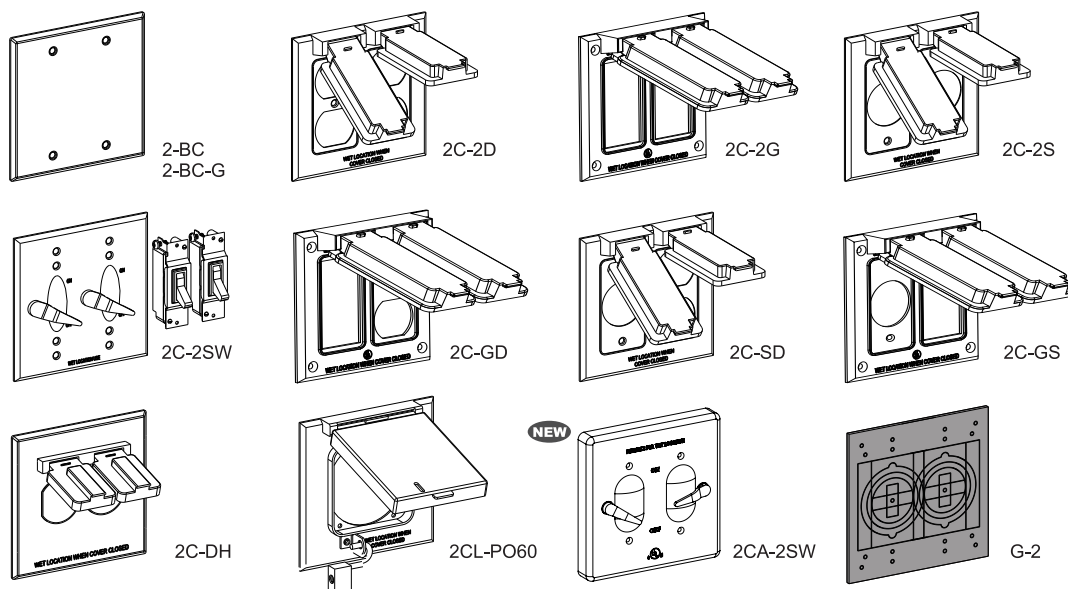
**2-GANG BLANK AND
DEVICE COVERS**

4-9/16" W x 4-1/2" H

Features:

- Zinc Die Cast (Except 2-BC, 2-BC-G, & 2CA-2SW)
- Powder Coat Finish
- Gasket Included
- Device mounted
- Meets NEC Article 406.9 (A) for damp and wet locations (for more information visit pg. W15)

Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.
		Gray	Bronze	White	
2-BC	Aluminum Blank (unpainted)	2-BC	-	-	25
2-BC-G	Heavy-Duty Galvanized Steel Blank	2-BC-G	2-BC-BR	2-BC-W	25
2C-2D	Two duplex receptacles	2C-2D	2C-2D-BR	2C-2D-W	12
2C-2G	Two GFCI	2C-2G	2C-2G-BR	2C-2G-W	12
2C-2S	Single recept. or Two switches- 1.406" diameter	2C-2S	2C-2S-BR	2C-2S-WH	12
2C-2SW	Two levers + Two 15A Single-Pole Switches	2C-2SW	2C-2SW-BR	2C-2SW-W	12
2C-GD	One GFCI, One Duplex	2C-GD	-	-	12
2C-SD	One Duplex, One Single recept. - 1.406" diameter	2C-SD	-	-	12
2C-GS	One GFCI, one switch or Single recept. - 1.406" diameter	2C-GS	-	-	12
2C-DH	Oversized One Duplex - Horizontal device mount unit has K.O.'s for box mounting	2C-DH	-	-	12
2CL-PO60	One 30, 50, 60 Amp 3 & 4 Wire With Built-In Padlock Hasp - 2.641" diameter	2CL-PO60	-	-	12
2CA-2SW <small>NEW</small>	Two Aluminum Levers, compatible with Standard Toggle Switches	2CA-2SW	2CA-2SW-BR	2CA-2SW-W	12
G-2	Universal 2-Gang Foam Gasket	G-2 (Black Only)			50


**3-GANG BLANK AND
DEVICE COVERS**

6-3/8" W x 4-1/2" H

Features:

- Zinc Die Cast
- Gray Powder Coat Finish
- Gasket Included
- Device mounted

Cat. No.	Description	Std. Pkg.
3-BC	Aluminum Blank	1
3C-3D*	Three Duplex receptacles	1
3C-3G*	Three GFCI	1
3C-3S*	Three Single recept. or Switches - 1.406" Diameter	1

*While Supplies Last - See Page C3 for Universal Cover

