




Duty: Medium
Rolling Elements: Ball
Lock: SKWEZLOC Locking Collar
Seal: Felt
Optional Seal: Contact
Temperature: -20° to 220°F

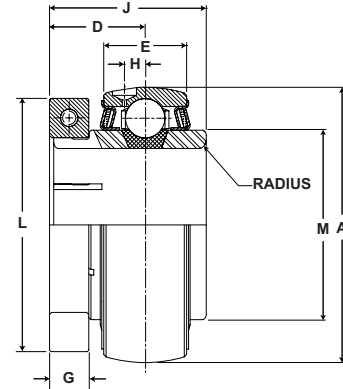

Medium Duty Bearing Insert - SKWEZLOC Locking Collar

Bore Diameter		Part No.	Basic Dynamic Rating lb/N	Dimensions inch / mm								Max Rad. To Clear	Torx Cap Screw	Unit Wt. lb/kg
inch	mm			A	J	D	E	G	H	L	M			
1	25.4	3-1T	4381 19487	2.4409 62	1 9/16 39.7	7/8 22.2	7/8 22.2	3/8 9.5	7/32 5.6	2 1/16 52.4	1 19/32 40.5	.040 1.02	T-25	1.2 .54
1 3/16	30.2	3-13T	5782 25718	2.8346 72	1 3/4 44.5	1 25.4	15/16 23.8	7/16 11.1	1/4 6.4	2 7/16 61.9	1 55/64 47.2	.040 1.02	T-27	1.8 .82
1 7/16	36.5	3-17T	7340 32648	3.1496 80	2 50.8	1 3/16 30.2	1 3/32 27.8	7/16 11.1	19/64 7.5	2 11/16 68.3	2 1/16 52.4	.062 1.57	T-27	2.2 1.00
1 1/2	38.1	3-18T	7901 35144	3.3470 85	2 50.8	1 3/16 30.2	1 3/32 27.8	7/16 11.1	19/64 7.5	2 13/16 71.4	2 19/64 58.3	.062 1.57	T-27	2.5 1.13
1 11/16	42.9	3-111T	7889	3.5433	2 3/32	1 9/32	1 1/8	9/16	17/64	3 1/4	2 15/32	0.062	T-30	3.0
1 3/4	44.5	3-112T	35090	90	53.2	32.5	28.6	14.3	6.7	82.6	62.7	1.57		1.36
1 15/16	49.2	3-115T	9752 43377	3.9370 100	2 1/4 57.2	1 5/16 33.3	1 3/16 30.2	9/16 14.3	19/64 7.5	3 1/2 88.9	2 23/32 69.1	.080 2.03	T-30	3.8 1.72
2 3/16	55.6	3-23T	11789 52437	4.3307 110	2 5/8 66.7	1 9/16 39.7	1 1/4 31.8	11/16 17.5	21/64 8.3	4 1/16 103.2	2 63/64 75.8	.080 2.03	T-45	4.9 2.22