

# H-MOSS® Controls Adaptive Dual Technology Wall Switches

# HUBBELL

## Features

- Dual technology sensing combines the individual advantages of passive infrared and ultrasonic detection
- Built in photocell with manual super saver mode for daylight harvesting
- Impact resistant hard lens is standard and color matched to the switch



## Ordering Information

Description	Device Color	UPC Number	Catalog Number
Dual (ultrasonic and passive infrared), 2 buttons for manual/auto control	Ivory	783585428475	AD2000I22

## Listings

cULus Listed  
Meets ASHRAE 90.1  
CEC Title 24 Certified

## Specifications

Housing	High impact plastic (UL-94-5V)
Mounting Strap	Plated steel
Lens	Dual element pyrometer and 12 element cylindrical hard lens
Sensing Indicator	Passive Infrared, Red LED. Ultrasonic, Green LED.

## Performance

### Electrical

Load Capacity	120VAC: 0-800W Incandescent, Electronic Ballast, LED Driver, 1/6 hp; 277W: 0-1800W Electronic/Magnetic Ballast, LED Driver, 1/6 hp
Power Supply	120/277V AC, 50/60Hz

### Mechanical

Wire Leads	#18 AWG stranded wire, 6" long with 1/2" stripped ends
------------	--

### Environmental

Operating Temperature	32°F to 104°F (0°C to 40°C); 0% to 95% non-condensing relative humidity
-----------------------	---


### Controls

Ambient Light	Adjustable ambient light override, 10 to 500 foot candles
Front Press Switch	Auto/Manual "ON" operating mode
Sensitivity	Adaptive
Time Delay	Digital, adaptive 4 to 30 minutes

### Coverage Pattern

Area	1000 square foot. Area of coverage based on passive infrared technology minor motion pattern. See illustration.
------	---

Mounting Height	42 to 54 inches above floor
-----------------	-----------------------------

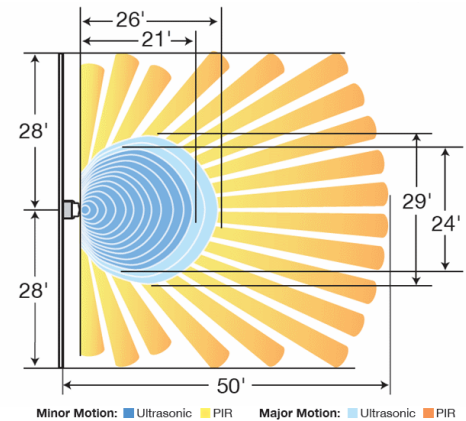

## Complementary Products

Wallplate	NP26I, SS26
-----------	-------------

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

