

**Scheduling Devices**  
**Count Down**  
**Wall Switch Timers**



**Features**

- 12 hour timer
- Pre-set 5 button selection with permanent time markings
- Manual override to OFF
- Alert to OFF function - red LED will flash during the final 30 seconds
- Designed for use on 120 or 277V AC circuits



**Ordering Information**


Description	UPC Number	Catalog Number
Count down timer wall switch; settings: OFF, 2, 4, 8, 12 hours	783585256474	DT5012W

**Listings**

cULus listed to UL60730-1 and UL60730-2  
 Meets ASHRAE 90.1, and GEC Title 24 compliant

**Specifications**

Housing	Polycarbonate
Mounting Bracket	Aluminum
Wire Leads	6" 14AWG copper wire
Mounting Strap	Steel

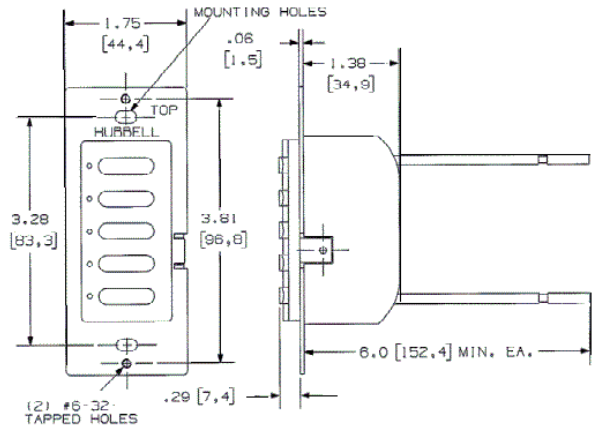

**Performance**

Controls	
5 button selection	Preset time selection
LED Indicators	Illuminates once time is selected
OFF Switch	6 seconds to 20 minutes (default set to 10 minutes)

Electrical	
Load Capacity	120VAC, 600W Incandescent, 5A Ballast, 5A CFL/LED, 277V; Horsepower rating 1/6

Environmental	
Operating Temperature	32°F to 122°F (0°C to 50°C) with rate of change not exceeding 20°F(11°C) per hour
Storage	-40°F to 150°F (-40°C to 65°C); 20% to 90% non condensing relative humidity

**Complementary Products**

Nylon Wallplate	NP26W
SS Wallplate	SS26
Snap-On Wallplate	NPS26W

**Online Resources**

- Customer Use Drawing
- eCatalog
- Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

