


The Timken Company

4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com
Part Number 240/530YMBW33W45AC3, Spherical Roller Bearings - Brass Cage

Spherical bearings are designed to manage high radial loads even when misalignment, poor lubrication, contamination, extreme speeds or critical application stresses are present.



[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Design Unit	Metric
d - Bore	530 mm
Cage Type	YMB
Cage Material	Brass

Dimensions

D - Outer Diameter	780 mm 30.709 in
---------------------------	---------------------



B' - Inner Ring Width	250 mm 9.843 in
B - Outer Ring Width	250 mm 9.8430 in

Abutment and Fillet Dimensions

R - Inner Ring "To Clear" Radius¹	5 mm 0.200 in
r - Outer Ring "To Clear" Radius²	5 mm 0.2 in
da - Inner Ring Backing Diameter	583.000 mm 23.0000 in
Da - Outer Ring Backing Diameter	725.000 mm 28.500 in

Basic Load Ratings

C0 - Static Radial Rating	13700000 N 3080000 lbf
C1(2) - Dynamic Radial Rating (Two-Rows)	6770000 N 1520000 lbf

Factors

e - ISO Factor³	0.28
Y0 - ISO Factor⁴	2.32
Y1 - ISO Factor⁵	2.37
Y2 - ISO Factor⁶	3.53
Reference Thermal Speed Rating (Grease)	320 rpm

Reference Thermal Speed Rating (Oil)⁷	350 rpm
---	---------

C_g - Geometry Factor⁸	0.1082
--	--------

¹ Maximum housing fillet radius that bearing corners will clear.

² Maximum shaft fillet radius that bearing corners will clear.

³ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.


⁴ These factors apply for both inch and metric calculations. See engineering

⁵ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁶ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁷ See thermal speed ratings in the engineering section.

⁸ Geometry constant for Lubrication Life Adjustment Factor a_{3l}.

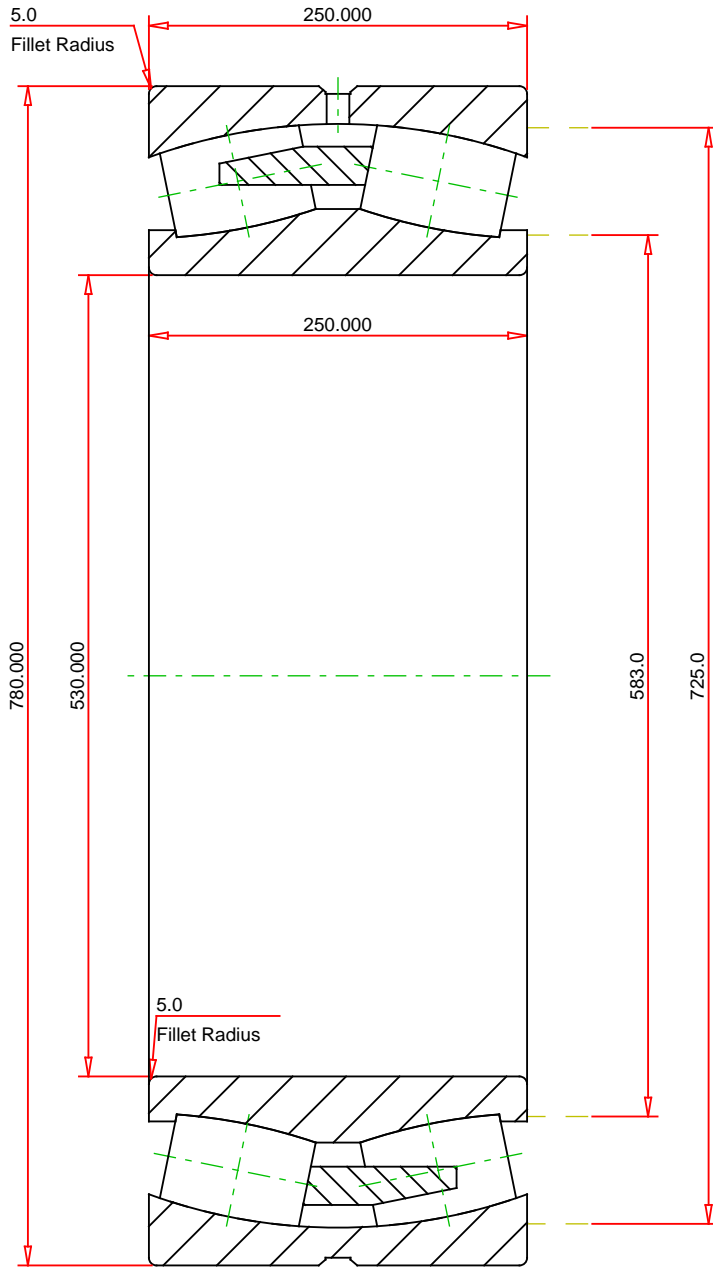

METRIC UNITS

Number of Rollers Per Row	28
ISO Factor e	0.28
ISO Factor Y0	2.32
ISO Factor Y1	2.37
ISO Factor Y2	3.53
Bearing Weight	408.0 kg
Cage Type	YMB
Cage Material	Brass

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

240/530YMBW33W45AC3
SRB ASSEMBLY

Dynamic Radial Rating (Two Rows)	6770000	N
Static Radial Rating	13700000	N

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY