



**The Timken Company**  
4500 Mt Pleasant St. NW  
N. Canton, OH 44720  
**Phone:** (234) 262-3000  
**E-Mail:** [CustomerCAD@timken.com](mailto:CustomerCAD@timken.com) • **Web site:** [www.timken.com](http://www.timken.com)

# Part Number RCJT2 NT, Fafnir® Two-Bolt Flanged Mounted Bearings Eccentric Locking Collar



[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)

| Specifications       |                 |
|----------------------|-----------------|
| Series               | Industrial      |
| Shaft Size d         | 2 in            |
| Bearing Type         | Ball Bearing    |
| Bearing Number       | G1200KRRB TDCF  |
| Seal Type            | Shroud Seal     |
| Housing Construction | Two-Bolt Flange |
| Alternate Part Name  | RCJT2 NT        |


| Dimensions |  |
|------------|--|
|------------|--|



|                            |                      |
|----------------------------|----------------------|
| <b>Total Length H</b>      | 215.9 mm<br>8-1/2 in |
| <b>Total Height L</b>      | 127 mm<br>5 in       |
| <b>Housing Width A</b>     | 46.8 mm<br>1.843 in  |
| <b>Bolt Hole Spacing J</b> | 184.1 mm<br>7.248 in |
| <b>Bolt Hole Size N</b>    | 17.1 mm<br>0.673 in  |
| <b>Flange Thickness A1</b> | 16.7 mm<br>0.657 in  |
| <b>Dimension B1</b>        | 71.4 mm<br>2.811 in  |
| <b>Dimension S1</b>        | 43.6 mm<br>1.717 in  |
| <b>Dimension E</b>         | 75.1 mm<br>2.957 in  |
| <b>Dimension d1</b>        | 76.2 mm<br>3 in      |

### Basic Load Ratings

|                            |                      |
|----------------------------|----------------------|
| <b>Static Load Rating</b>  | 29200 N<br>6570 lbf  |
| <b>Dynamic Load Rating</b> | 48100 N<br>10800 lbf |

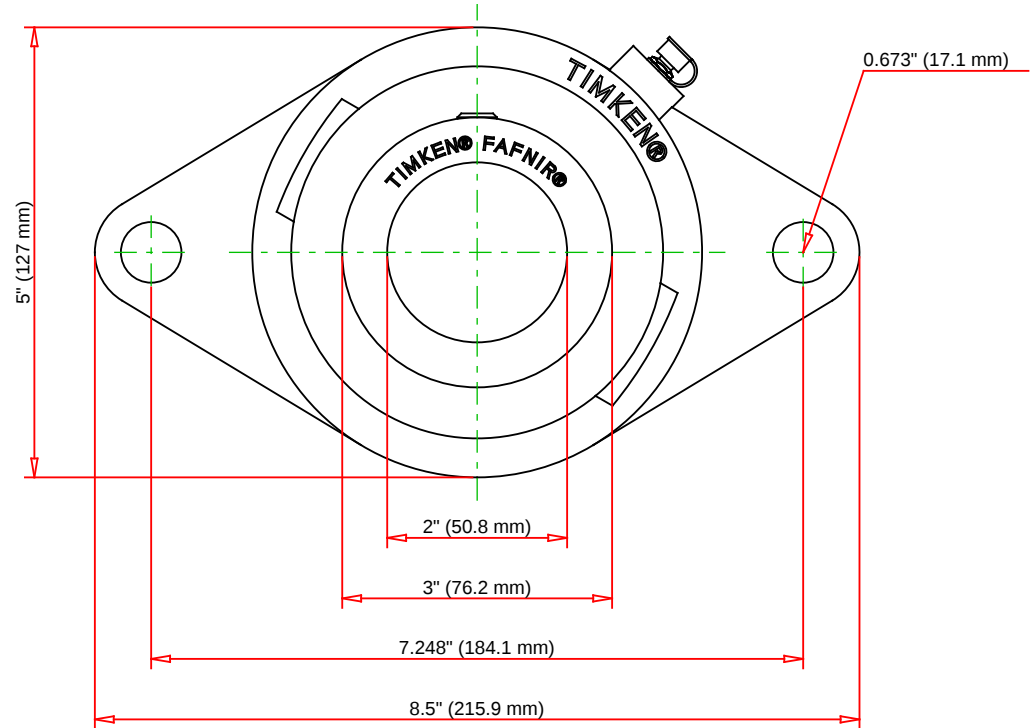

# RCJT2 NT

Fafnir® Two-Bolt Flanged Mounted Bearings  
Eccentric Locking Collar

FOR DISCUSSION ONLY