



The Timken Company

4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number 22214KEJW33C3, Spherical Roller Bearings - Steel Cage

Spherical bearings are designed to manage high radial loads even when misalignment, poor lubrication, contamination, extreme speeds or critical application stresses are present.



[Specifications](#) | [Factors](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#)

Specifications

UPC Code	087796173729
Design Unit	Metric
d - Bore	70 mm
Lubrication Type	Standard Grease
Bore_Taper	1/12
Cage Type	EJ
Cage Material	Steel
Superseded Part	22214KCJW33C3



e - ISO Factor¹	0.23
Y0 - ISO Factor²	2.84
Y1 - ISO Factor³	2.9
Y2 - ISO Factor⁴	4.32
Reference Thermal Speed Rating (Grease)	3900 rpm
Reference Thermal Speed Rating (Oil)⁵	4800 rpm
Cg - Geometry Factor⁶	0.0552

Dimensions

D - Outer Diameter	125 mm 4.9213 in
B' - Inner Ring Width	31 mm 1.2205 in
B - Outer Ring Width	31 mm 1.2205 in

Abutment and Fillet Dimensions

R - Inner Ring "To Clear" Radius⁷	1.5 mm 0.060 in
r - Outer Ring "To Clear" Radius⁸	1.5 mm 0.06 in
da - Inner Ring Backing Diameter	84.000 mm 3.300 in
Da - Outer Ring Backing Diameter	114.000 mm 4.500 in

Basic Load Ratings

C0 - Static Radial Rating	231000 N 52000 lbf
----------------------------------	-----------------------

C1(2) - Dynamic Radial Rating (Two-Rows)	213000 N 47800 lbf
---	-----------------------

¹ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

² These factors apply for both inch and metric calculations. See engineering

³ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.


⁴ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁵ See thermal speed ratings in the engineering section.

⁶ Geometry constant for Lubrication Life Adjustment Factor a3l.

⁷ Maximum housing fillet radius that bearing corners will clear.

⁸ These maximum fillet radii will be cleared by the bearing corners.

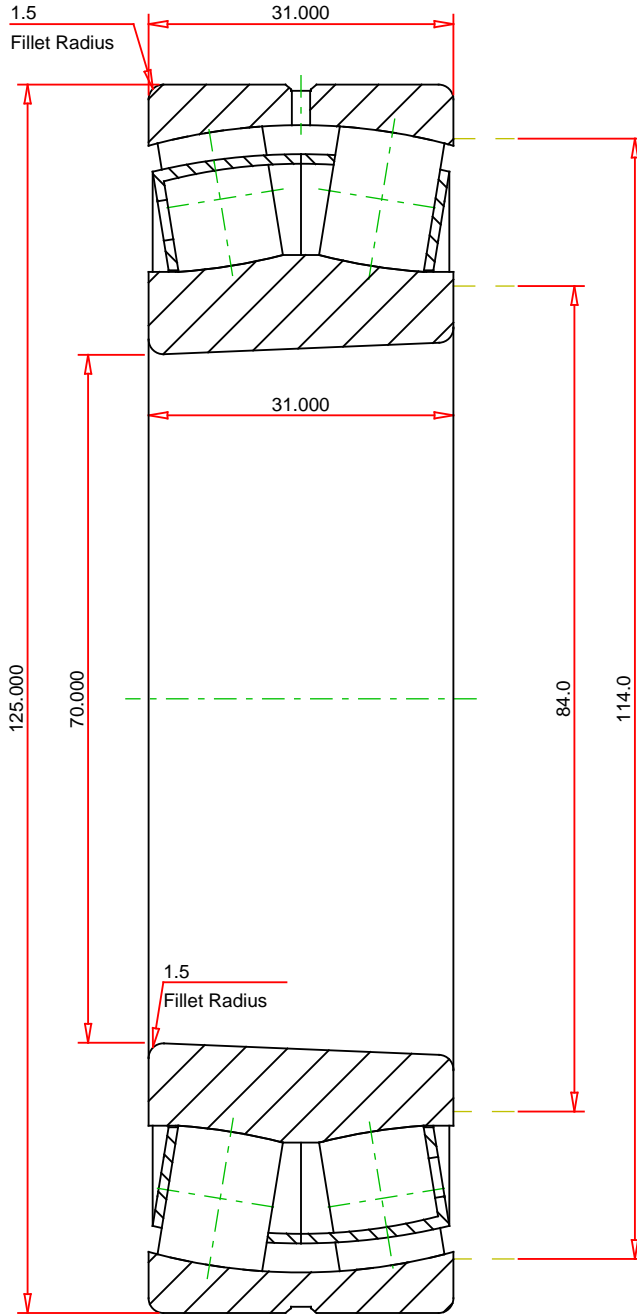

METRIC UNITS

Number of Rollers Per Row	19
ISO Factor e	0.23
ISO Factor Y0	2.84
ISO Factor Y1	2.90
ISO Factor Y2	4.32
Bearing Weight	kg
Cage Type	EJ
Cage Material	Steel
Bore Taper	1/12

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

22214KEJW33C3
SRB ASSEMBLY

Dynamic Radial Rating (Two Rows)	213000	N
Static Radial Rating	231000	N

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY