



The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number E-4BF-TRB-100MM, Type E Flange: 4-Bolt Bearing

Type E tapered roller bearing Mounted Bearings are available in a wide variety of sizes and configurations to meet the requirements of demanding applications. Popular part numbers are in stock for immediate availability. Metric sizes also are available in shaft diameters ranging from 35 mm to 125 mm.

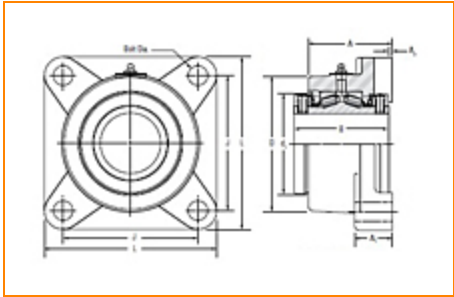

[Specifications](#) | [Dimensions](#) | [Radial and Thrust Factors; Speed and Slip-Fit Load Limits](#) | [Note](#)

Specifications	
Shaft Size	100 mm
Shaft Size Type	Metric
UPC Code	053893544335
Lubrication	Grease - Premium Industrial
Housing Coating	E-Coat

Dimensions	
Dimension B	6 1/4 in
Dimension L	10 1/4 in



Dimension A	5 5/8 in
Dimension J	7 3/4 in
Dimension A ₂	1/4 in
Bolt Diameter	7/8 in
Dimension A ₁	2 1/8 in
Dimension D ¹	8-1/4 in
Dimension d ₁	6-1/16 in

Radial and Thrust Factors; Speed and Slip-Fit Load Limits

e	0.49
X (if $F_a/F_r \leq e$)	0.87
Y (if $F_a/F_r \leq e$)	1.77
X (if $F_a/F_r > e$)	0.7
Y (if $F_a/F_r > e$)	2.14
K Factor	1.23
C ₉₀ Dynamic Load Rating ²	26900 lbf
C ₀ Static Load Rating	154000 lbf
F _{a-max} Maximum Permissible Thrust Load ³	6908 lbf
F _{r-max} Maximum Allowable Slip Fit Radial Load ⁴	22000 lbf
Max. Speed ⁵	1530 rpm

Note

Note

Note: All units have a 1/8" pipe thread grease fitting

The Maximum Permissible Thrust Load applies to conditions of slip fit with set screw mounting or in applications where a large moment loading occurs. The values shown are valid only when two collars and set screws are used.

When heavy thrust forces are applied, the friction between the pillow block base may not be sufficient to prevent movement. Mechanical stops or shear bars with strength sufficient to support the load should be added. Never weld the pillow block or bearing to secure it to the shaft or base.



¹ Tolerance $+.000 / -.002$ in

² C_{90} is the Dynamic Load Rating based on a rated Life of 90 million revolutions (3000 hrs at 500 RPM).

³ F_{a-max} is based on the limits of the holding force of two properly tightened collars and set screws. Fifty percent of the values should be used when a single collar is installed.

⁴ If the application loads approach or exceed F_{r-max} , the shaft fit should be adjusted to a line-to-line (g6 or h6) or light press fit (m6).

⁵ Timken Double Lip Seal

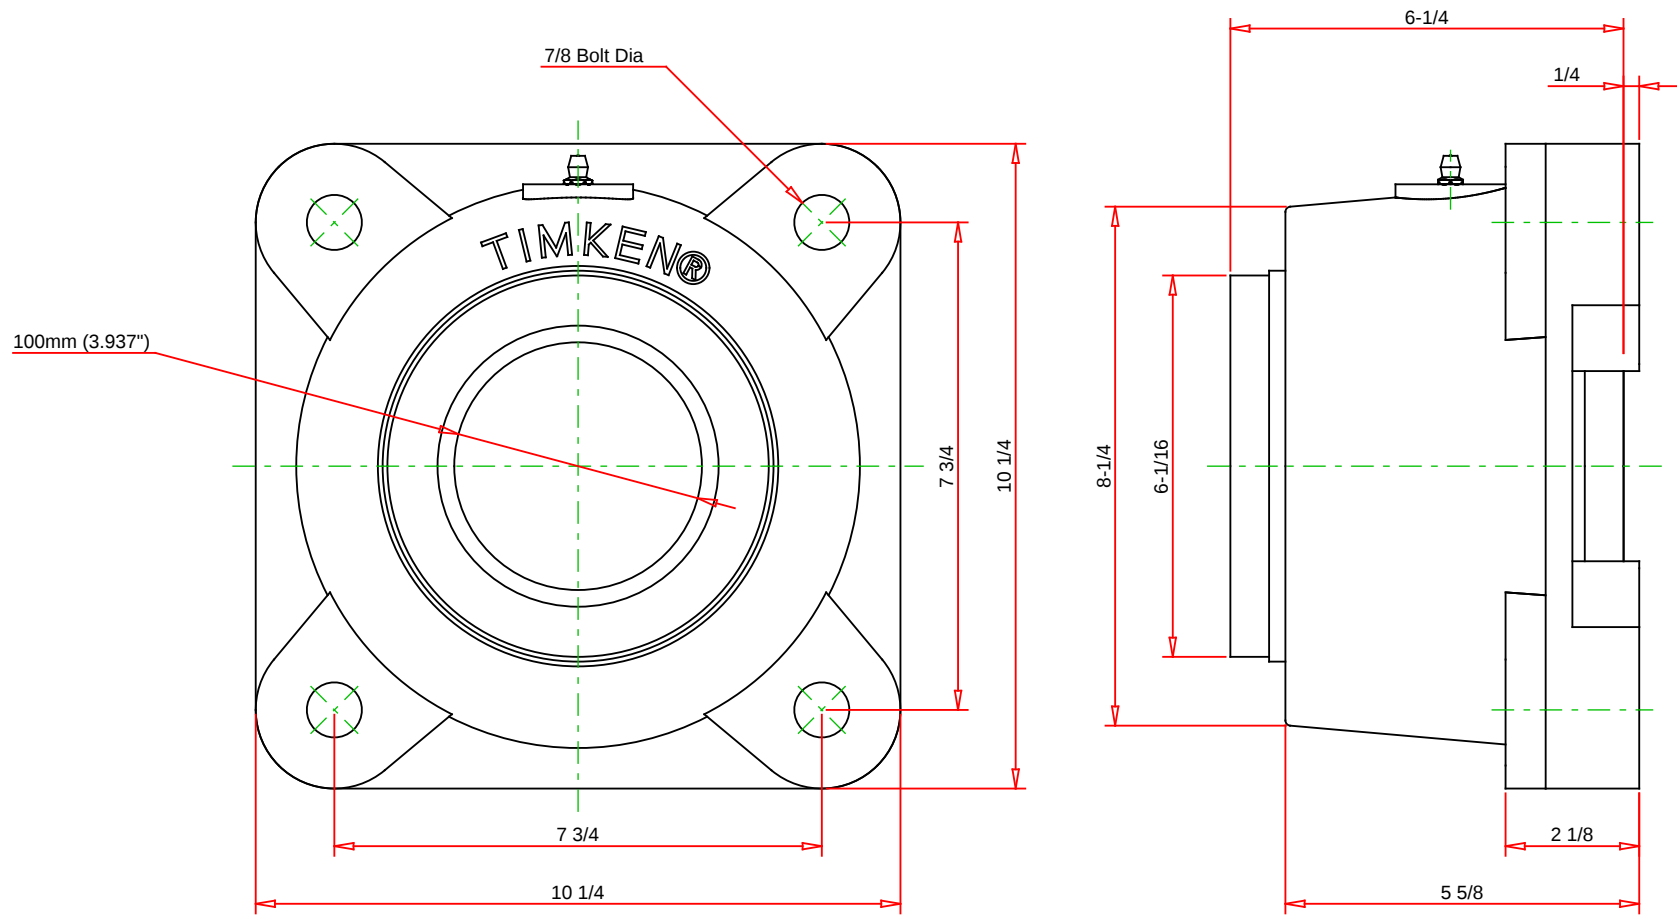

Note: Section View not to Scale

IMPERIAL UNITS

	C90 Co Fa-MAX Fr-MAX MAX SPEED	26900 154000 6908 22000 1530	LBS LBS LBS LBS RPM	TIMKEN THE TIMKEN COMPANY NORTH CANTON, OHIO USA	E-4BF-TRB-100MM FLANGE: 4-BOLT

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY