




The Timken Company
 4500 Mt Pleasant St. NW
 N. Canton, OH 44720
Phone: (234) 262-3000
E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number 22322EMW810C4, Spherical Roller Bearings - Brass Cage

Spherical bearings are designed to manage high radial loads even when misalignment, poor lubrication, contamination, extreme speeds or critical application stresses are present.

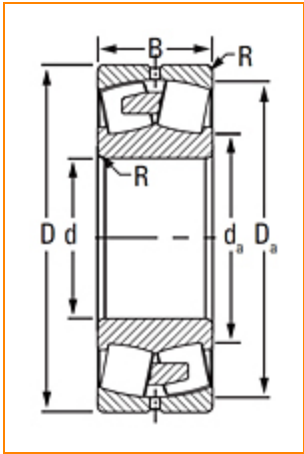

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Design Unit	Metric
d - Bore	100 mm
Cage Type	EM
Cage Material	Brass
Superseded Part	22322YMW810C4

Dimensions

D - Outer Diameter	239.992 mm 9.4485 in
 - Inner Ring Width	80 mm 3.1496 in

B - Outer Ring Width

80 mm
3.1496 in

Abutment and Fillet Dimensions**R - Inner Ring "To Clear" Radius¹**

2.5 mm
0.100 in

r - Outer Ring "To Clear" Radius²

2.5 mm
0.1 in

da - Inner Ring Backing Diameter

144.0 mm
5.7000 in

Da - Outer Ring Backing Diameter

215.000 mm
8.5000 in

Basic Load Ratings**C0 - Static Radial Rating**

1050000 N
236000 lbf

C1(2) - Dynamic Radial Rating (Two-Rows)

949000 N
213000 lbf

Factors**e - ISO Factor³**

0.32

Y0 - ISO Factor⁴

2.04

Y1 - ISO Factor⁵

2.08

Y2 - ISO Factor⁶

3.1

Reference Thermal Speed Rating (Grease)

2200 rpm

Reference Thermal Speed Rating (Oil)⁷	2500 rpm
---	----------

Cg - Geometry Factor⁸	0.0792
---	--------

¹ Maximum housing fillet radius that bearing corners will clear.

² Maximum shaft fillet radius that bearing corners will clear.

³ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.


⁴ These factors apply for both inch and metric calculations. See engineering

⁵ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁶ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁷ See thermal speed ratings in the engineering section.

⁸ Geometry constant for Lubrication Life Adjustment Factor a3l.

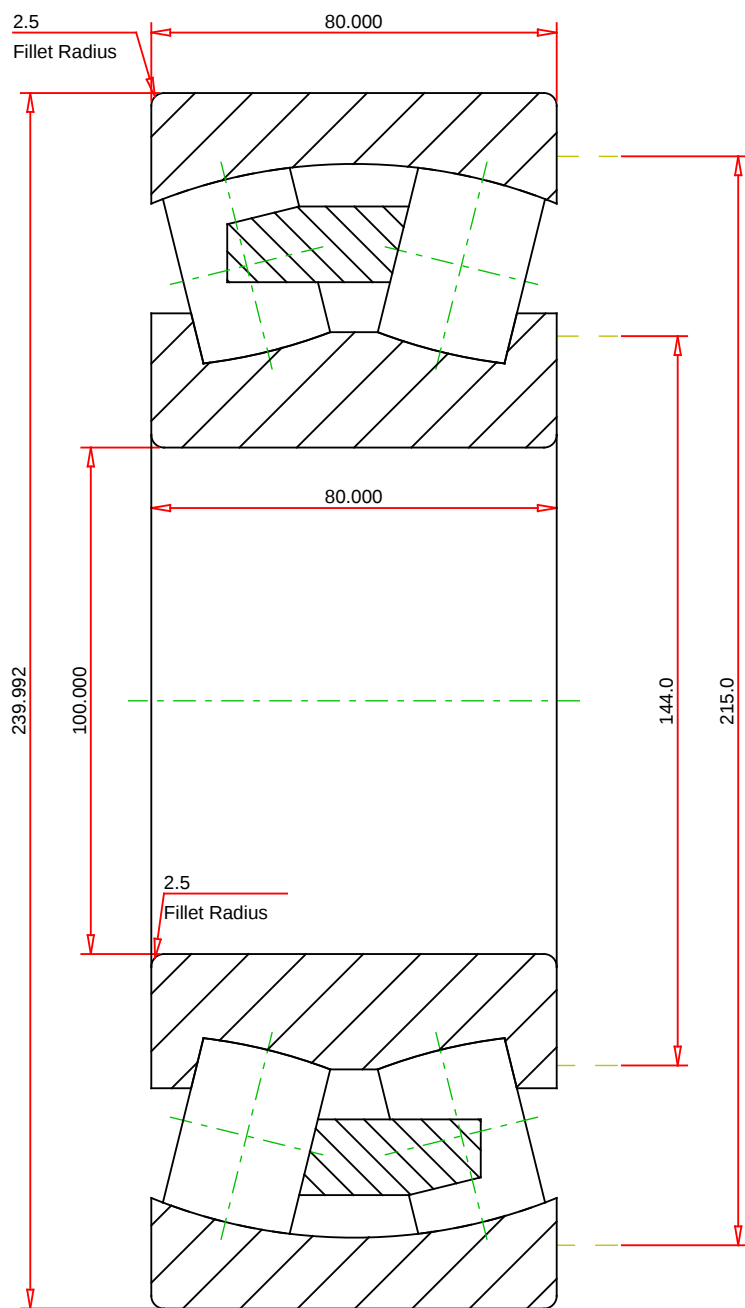

METRIC UNITS

Number of Rollers Per Row	15
ISO Factor e	0.32
ISO Factor Y0	2.04
ISO Factor Y1	2.08
ISO Factor Y2	3.10
Bearing Weight	17.8 kg
Cage Type	EM
Cage Material	Brass



THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

22322EMW810C4
SRB ASSEMBLY

Dynamic Radial Rating (Two Rows)	949000	N
Static Radial Rating	1050000	N

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY