


The Timken Company

4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com
Part Number 23056KEMBW507C08, Spherical Roller Bearings - Brass Cage

Spherical bearings are designed to manage high radial loads even when misalignment, poor lubrication, contamination, extreme speeds or critical application stresses are present.



[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Design Unit	Metric
d - Bore	280 mm
Bore_Taper	1/12
Cage Type	EMB
Cage Material	Brass
Superseded Part	23056KYMBW507C08

Dimensions

D - Outer Diameter

 420 mm
 16.535 in

B' - Inner Ring Width	106 mm 4.173 in
------------------------------	--------------------

B - Outer Ring Width	106 mm 4.1730 in
-----------------------------	---------------------

Abutment and Fillet Dimensions

R - Inner Ring "To Clear" Radius¹	3 mm 0.120 in
---	------------------

r - Outer Ring "To Clear" Radius²	3 mm 0.12 in
---	-----------------

da - Inner Ring Backing Diameter	309 mm 12.2000 in
---	----------------------

Da - Outer Ring Backing Diameter	389 mm 15.300 in
---	---------------------

Basic Load Ratings

C0 - Static Radial Rating	2810000 N 631000 lbf
----------------------------------	-------------------------

C1(2) - Dynamic Radial Rating (Two-Rows)	1820000 N 410000 lbf
---	-------------------------

Factors

e - ISO Factor³	0.23
-----------------------------------	------

Y0 - ISO Factor⁴	2.86
------------------------------------	------

Y1 - ISO Factor⁵	2.92
------------------------------------	------

Y2 - ISO Factor⁶	4.35
------------------------------------	------

Reference Thermal Speed Rating (Grease)	1100 rpm
--	----------

Reference Thermal Speed Rating (Oil)⁷	1300 rpm
---	----------

C_g - Geometry Factor⁸	0.1182
--	--------

¹ Maximum housing fillet radius that bearing corners will clear.

² Maximum shaft fillet radius that bearing corners will clear.

³ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.


⁴ These factors apply for both inch and metric calculations. See engineering

⁵ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁶ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁷ See thermal speed ratings in the engineering section.

⁸ Geometry constant for Lubrication Life Adjustment Factor a_{3l}.

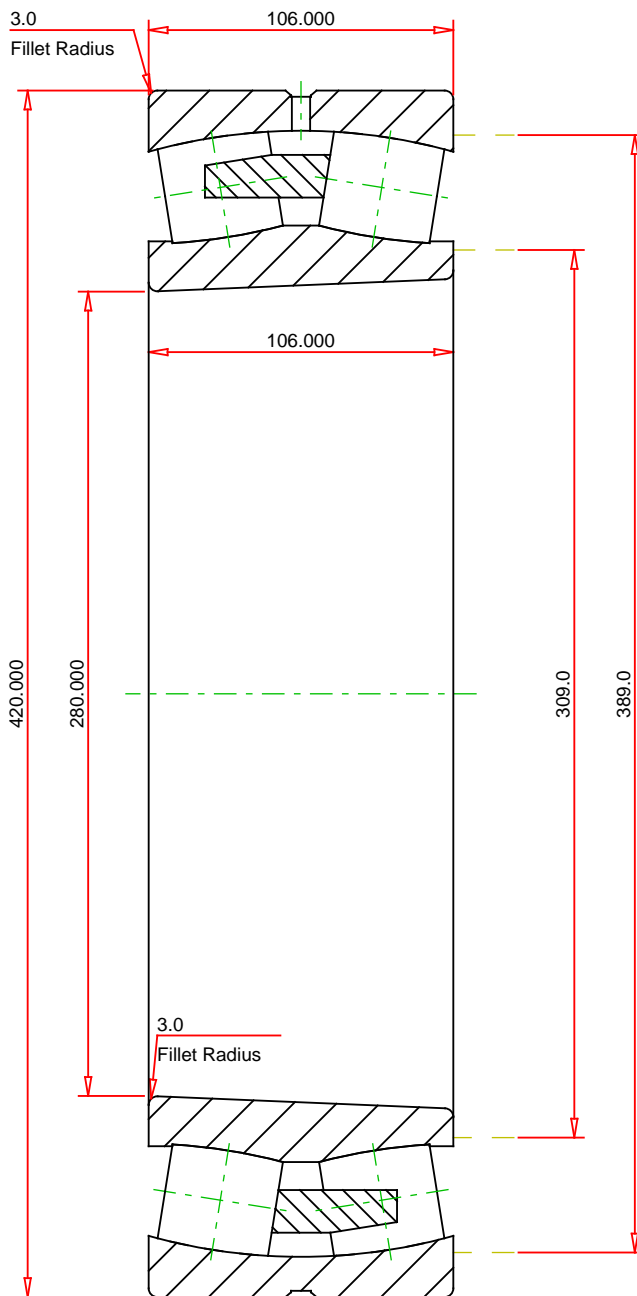

METRIC UNITS

Number of Rollers Per Row	26
ISO Factor e	0.23
ISO Factor Y0	2.86
ISO Factor Y1	2.92
ISO Factor Y2	4.35
Bearing Weight	51.0 kg
Cage Type	EMB
Cage Material	Brass
Bore Taper	1/12

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

23056KEMBW507C08 SRB ASSEMBLY	
Dynamic Radial Rating (Two Rows)	1820000 N
Static Radial Rating	2810000 N

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY