


The Timken Company

4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com
Part Number 23060EJW507C08C4, Spherical Roller Bearings - Steel Cage

Spherical bearings are designed to manage high radial loads even when misalignment, poor lubrication, contamination, extreme speeds or critical application stresses are present.



[Specifications](#) | [Factors](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#)

Specifications

UPC Code	087796163928
Design Unit	Metric
d - Bore	300 mm
Lubrication Type	Standard Grease
Cage Type	EJ
Cage Material	Steel
Superseded Part	23060CJW507C08C4

Factors


e - ISO Factor¹ 0.24

Y0 - ISO Factor²	2.8
Y1 - ISO Factor³	2.87
Y2 - ISO Factor⁴	4.27
Reference Thermal Speed Rating (Grease)	940 rpm
Reference Thermal Speed Rating (Oil)⁵	1100 rpm
Cg - Geometry Factor⁶	0.1231

Dimensions

D - Outer Diameter	460 mm 18.1100 in
B' - Inner Ring Width	118 mm 4.646 in
B - Outer Ring Width	118 mm 4.6460 in

Abutment and Fillet Dimensions

R - Inner Ring "To Clear" Radius⁷	3 mm 0.120 in
r - Outer Ring "To Clear" Radius⁸	3 mm 0.12 in
da - Inner Ring Backing Diameter	334.000 mm 13.100 in
Da - Outer Ring Backing Diameter	425.000 mm 16.8000 in

Basic Load Ratings

C0 - Static Radial Rating	3570000 N 803000 lbf
C1(2) - Dynamic Radial Rating (Two-Rows)	2330000 N 525000 lbf

¹ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

² These factors apply for both inch and metric calculations. See engineering

³ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.


⁴ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁵ See thermal speed ratings in the engineering section.

⁶ Geometry constant for Lubrication Life Adjustment Factor a3l.

⁷ Maximum housing fillet radius that bearing corners will clear.

⁸ These maximum fillet radii will be cleared by the bearing corners.

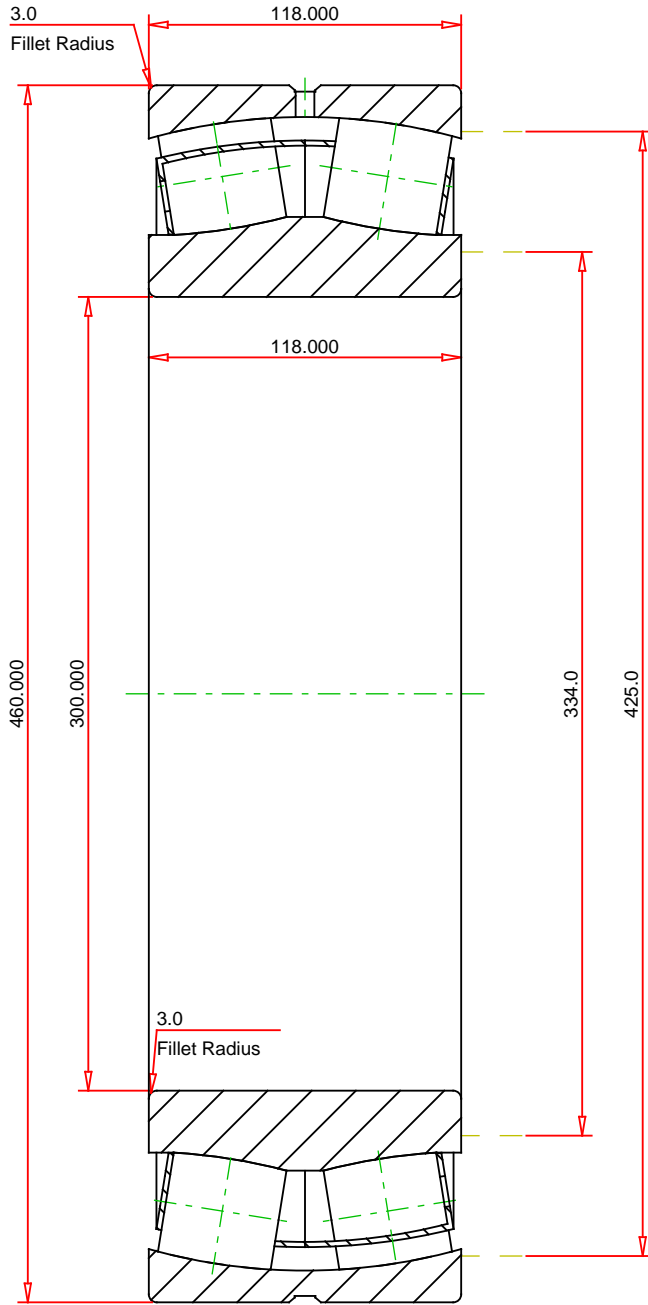

METRIC UNITS

Number of Rollers Per Row	25
ISO Factor e	0.24
ISO Factor Y0	2.80
ISO Factor Y1	2.87
ISO Factor Y2	4.27
Bearing Weight	kg
Cage Type	EJ
Cage Material	Steel

TIMKEN®

23060EJW507C08C4
SRB ASSEMBLY

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

Dynamic Radial Rating (Two Rows)	2330000	N
Static Radial Rating	3570000	N

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY