



The Timken Company

4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number 24056KEJW33C3, Spherical Roller Bearings - Steel Cage

Spherical bearings are designed to manage high radial loads even when misalignment, poor lubrication, contamination, extreme speeds or critical application stresses are present.



[Specifications](#) | [Factors](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#)

Specifications

UPC Code	087796230576
Design Unit	Metric
d - Bore	280 mm
Lubrication Type	Standard Grease
Bore_Taper	1/30
Cage Type	EJ
Cage Material	Steel
Superseded Part	24056KCJW33C3



e - ISO Factor¹	0.3
Y0 - ISO Factor²	2.2
Y1 - ISO Factor³	2.25
Y2 - ISO Factor⁴	3.35
Reference Thermal Speed Rating (Grease)	760 rpm
Reference Thermal Speed Rating (Oil)⁵	860 rpm
Cg - Geometry Factor⁶	0.1173

Dimensions

D - Outer Diameter	420 mm 16.535 in
B' - Inner Ring Width	140 mm 5.512 in
B - Outer Ring Width	140 mm 5.512 in

Abutment and Fillet Dimensions

R - Inner Ring "To Clear" Radius⁷	3 mm 0.120 in
r - Outer Ring "To Clear" Radius⁸	3 mm 0.12 in
da - Inner Ring Backing Diameter	307.000 mm 12.100 in
Da - Outer Ring Backing Diameter	388.000 mm 15.300 in

Basic Load Ratings

C0 - Static Radial Rating	4090000 N 921000 lbf
----------------------------------	-------------------------

C1(2) - Dynamic Radial Rating (Two-Rows)	2420000 N 544000 lbf
---	-------------------------

¹ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

² These factors apply for both inch and metric calculations. See engineering

³ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.


⁴ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁵ See thermal speed ratings in the engineering section.

⁶ Geometry constant for Lubrication Life Adjustment Factor a3l.

⁷ Maximum housing fillet radius that bearing corners will clear.

⁸ These maximum fillet radii will be cleared by the bearing corners.

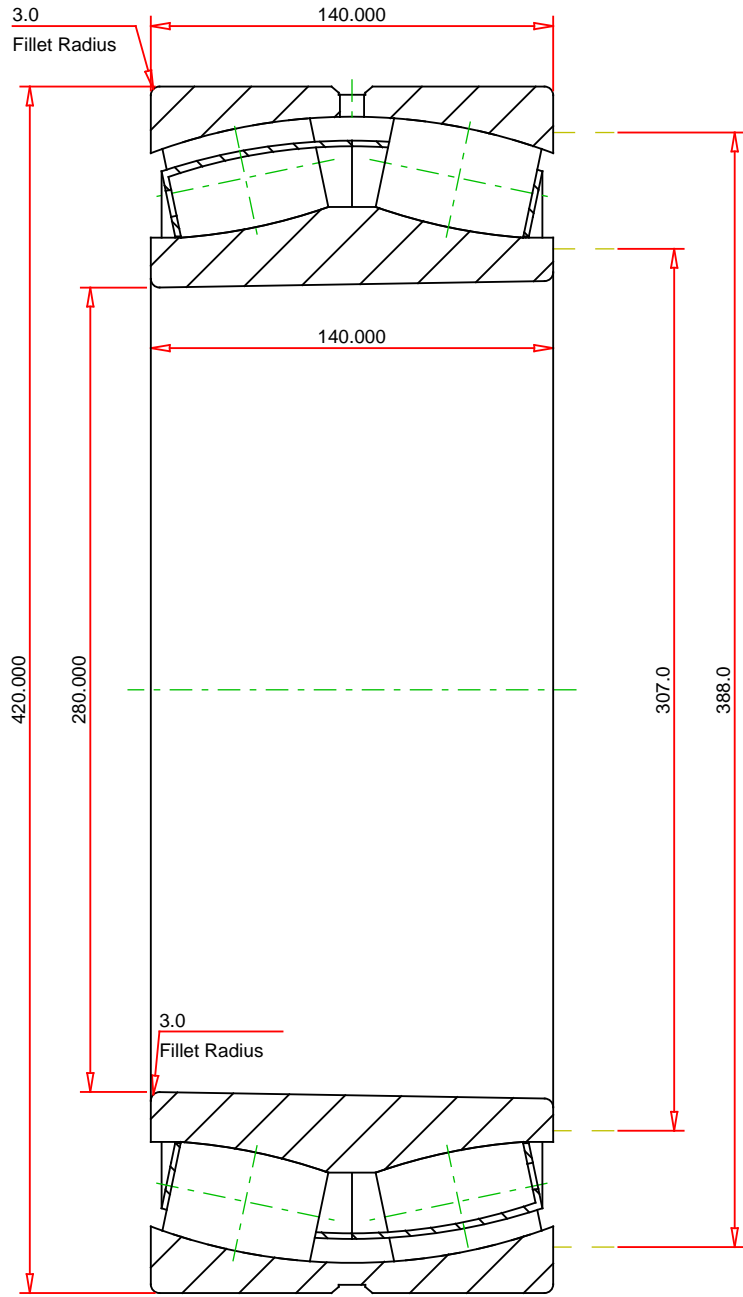

METRIC UNITS

Number of Rollers Per Row	27
ISO Factor e	0.30
ISO Factor Y0	2.20
ISO Factor Y1	2.25
ISO Factor Y2	3.35
Bearing Weight	kg
Cage Type	EJ
Cage Material	Steel
Bore Taper	1/30

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

24056KEJW33C3 SRB ASSEMBLY		
Dynamic Radial Rating (Two Rows)	2420000	N
Static Radial Rating	4090000	N

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY