



**The Timken Company**

4500 Mt Pleasant St. NW

N. Canton, OH 44720

**Phone:** (234) 262-3000

**E-Mail:** [CustomerCAD@timken.com](mailto:CustomerCAD@timken.com) • **Web site:** [www.timken.com](http://www.timken.com)

## Part Number 21320KEJW33C4, Spherical Roller Bearings - Steel Cage

Spherical bearings are designed to manage high radial loads even when misalignment, poor lubrication, contamination, extreme speeds or critical application stresses are present.



[Specifications](#) | [Factors](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#)

### Specifications

<b>UPC Code</b>	0087796358706
<b>Design Unit</b>	Metric
<b>d - Bore</b>	100 mm
<b>Lubrication Type</b>	Standard Grease
<b>Bore_Taper</b>	1/12
<b>Cage Type</b>	EJ
<b>Cage Material</b>	Steel
<b>Superseded Part</b>	21320KCJW33C4



<b>e - ISO Factor<sup>1</sup></b>	0.22
<b>Reference Thermal Speed Rating (Grease)</b>	2800 rpm
<b>Reference Thermal Speed Rating (Oil)<sup>2</sup></b>	3400 rpm
<b>Cg - Geometry Factor<sup>3</sup></b>	0.0747

## Dimensions

<b>D - Outer Diameter</b>	215 mm 8.4646 in
<b>B' - Inner Ring Width</b>	47 mm 1.8504 in
<b>B - Outer Ring Width</b>	47 mm 1.8504 in

## Abutment and Fillet Dimensions

<b>R - Inner Ring "To Clear" Radius<sup>4</sup></b>	2.5 mm 0.098 in
<b>r - Outer Ring "To Clear" Radius<sup>5</sup></b>	0 mm 0 in
<b>da - Inner Ring Backing Diameter</b>	132.9 mm 5.220 in
<b>Da - Outer Ring Backing Diameter</b>	192.8 mm 7.6000 in

## Basic Load Ratings

<b>C0 - Static Radial Rating</b>	530000 N 121000 lbf
----------------------------------	------------------------

<b>C1(2) - Dynamic Radial Rating (Two-Rows)</b>	521000 N 119000 lbf
---	------------------------


<sup>1</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

<sup>2</sup> See thermal speed ratings in the engineering section.

<sup>3</sup> Geometry constant for Lubrication Life Adjustment Factor a<sub>3</sub>l.

<sup>4</sup> Maximum housing fillet radius that bearing corners will clear.

<sup>5</sup> These maximum fillet radii will be cleared by the bearing corners.

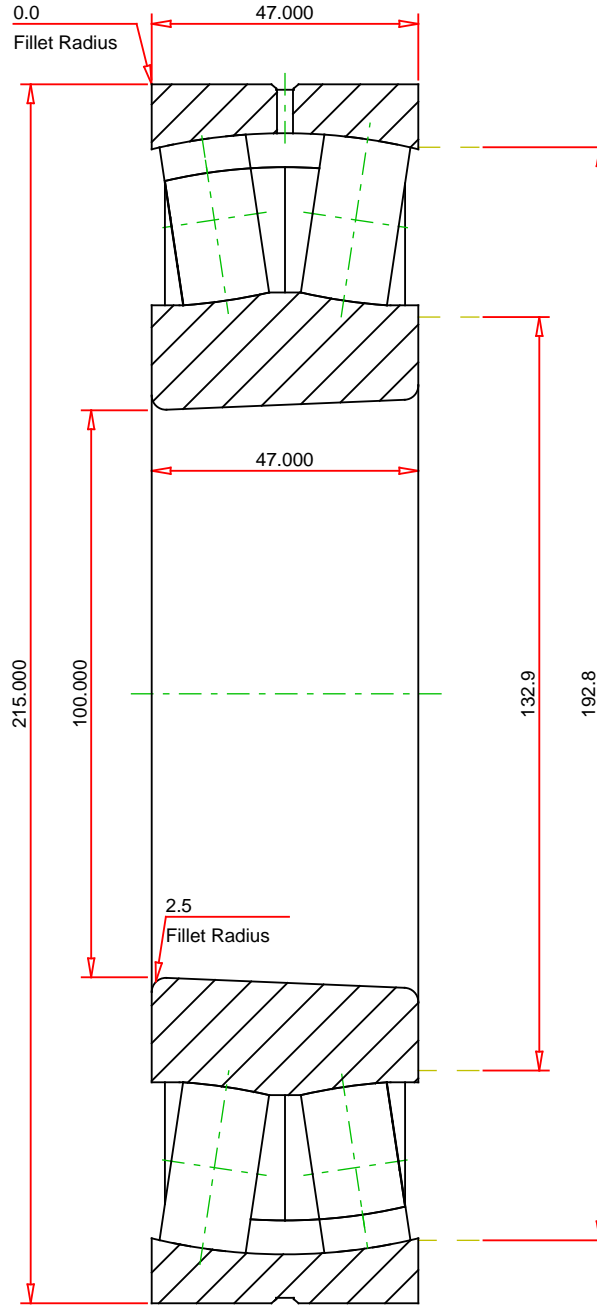

METRIC UNITS

Number of Rollers Per Row	32
ISO Factor e	0.22
ISO Factor Y0	.00
ISO Factor Y1	.00
ISO Factor Y2	.00
Bearing Weight	kg
Cage Type	EJ
Cage Material	Steel
Bore Taper	1/12

**TIMKEN**®

**THE TIMKEN COMPANY**  
NORTH CANTON, OHIO USA

**21320KEJW33C4**  
SRB ASSEMBLY

Dynamic Radial Rating (Two Rows)	521000	N
Static Radial Rating	530000	N

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

**FOR DISCUSSION ONLY**