

▼ Gauge shown: **T6003L**



## T Series

Pressure Range:  
**0 - 50,000 psi**

Face Diameter:  
**6.4 inches**

Accuracy, % of full scale:  
**± 1/2% and ± 1 1/2%**



### Cone Mount Gauge Adaptor

Contains fittings to connect 1/4" cone fitting gauge to 3/8" cone system.

Kit includes **43-301** tee, **43-704** gauge adaptor and **45-116** tubing.

Order model number: **83-011**.

Page: 95



### Cone Mount Gauge Connector


For connecting gauges with 1/4" cone fitting directly to model number **11-100** or **11-400** pump. May be used with other 1/4" cone systems.

Order model number: **43-704**

Page: 95

- Calibrated for dual scale reading in psi and bar
- All gauges have spring-loaded backs with rubber blow-out plugs to protect case assembly in case of over-pressurization
- 40,000 and 50,000 psi models include flange mounting
- 1/2" NPTF versions are made of high-strength alloy steel
- 0.25" cone models are made of 316 stainless steel, with 403 stainless steel on 40,000 and 50,000 psi models
- Integral maximum indicator pointer standard on all gauges

▼ An Enerpac P2282 hand pump equipped with a T6011L test system gauge is used for proof pressure testing of hydraulic valves.

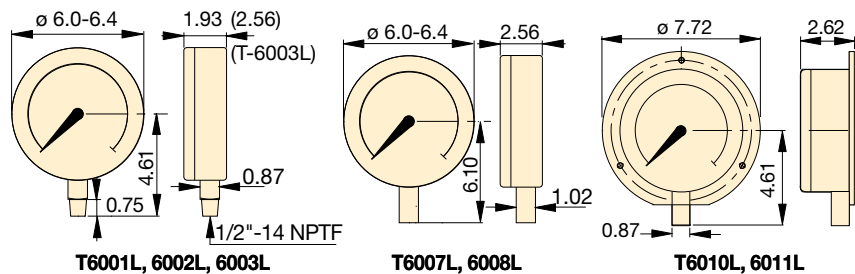

Pressure Range (psi)	Pressure Range (bar)	Model Number		Number Intervals (psi)	Graduation Intervals (psi)	Number Intervals (bar)	Graduation Intervals (bar)
		Alloy Steel 1/2" NPTF	Stainless Steel 0.25" Cone				
0-1,000*	0-70	<b>T6001L</b>	-	100	10	10	1
0-5,000*	0-350	<b>T6002L</b>	-	500	50	50	5
0-10,000*	0-700	<b>T6003L</b>	<b>T6007L</b>	1,000	100	100	10
0-20,000*	0-1400	-	<b>T6008L</b>	1,000	100	200	20
0-40,000**	0-2800	-	<b>T6010L</b>	5,000	200	500	20
0-50,000**	0-3500	-	<b>T6011L</b>	5,000	500	500	50

\* Accuracy: ± 1/2%

\*\* Accuracy: ± 1 1/2%