


# Hydraulic Wedgie and Spread Cylinders


▼ Shown clockwise from top: **WR15, WR5, A92**




- Single-acting, spring return
- **WR15:** For long stroke spreading applications
- **WR5:** For use in very confined work areas
- **A92\*:** Spreader attachment screws onto RC-Series 10-ton cylinders (except RC101)\*



**WR5**

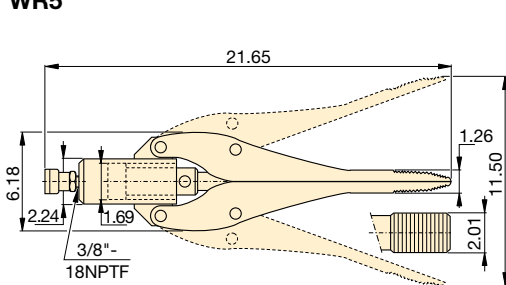

**WR15**



**A92\***

| Spreader Capacity | Tip Clearance | Model Number | Maximum Spread | Cylinder Effective Area | Oil Capacity       | Wt.   |
|-------------------|---------------|--------------|----------------|-------------------------|--------------------|-------|
| (ton)             | (in)          |              | (in)           | (in <sup>2</sup> )      | (in <sup>3</sup> ) | (lbs) |
| 1.00              | 0.50          | <b>WR5</b>   | 3.70           | 1.00                    | 0.61               | 5.0   |
| 0.75              | 1.26          | <b>WR15</b>  | 11.50          | 2.25                    | 3.91               | 25.0  |
| 1.00              | 1.38          | <b>A92*</b>  | 6.25           | —                       | —                  | 8.0   |

\* Maximum system pressure must be limited to half the rated pressure (5000 psi)

## A, WR Series

Capacity:

**0.75 - 1.00 ton**

Tip Clearance:

**0.50 - 1.38 inches**

Maximum Spread Range:

**3.70 - 11.50 inches**

Maximum Operating Pressure:

**10,000 psi**



### RC-Series TRIO Cylinders

10-ton RC-Series TRIO cylinders (except RC101) fit into A92 Spreader attachment.

Page: **6**



### Best Match Hand Pump

To power your WR5 and WR15 the **P392** hand pump is an ideal choice.

Page: **86**



### Portable Hydraulic Toolbox Set SWR5PGH

Tool box includes P392 hand pump, gauge adaptor assembly, hose and **WR5**.

Page: **65**

▼ A **WR5** Wedgie cylinder is used to loosen a bridge bearing.

