

## GP6500

### GP SERIES Portable Generator

1 of 2

### Features

- **CO-SENSE™ Technology** – STOPS, ALERTS, SAVES. Powerful protection against hazardous carbon monoxide.
- **PowerRush™ Advanced Technology** delivers up to 40% more starting capacity allowing you to do more with less.\*
- **Generac's OHV engine** with splash lubrication provides a long engine life.
- **Low-oil level shutdown** automatically safeguards engine from damage.
- **Large-capacity steel fuel tank** with incorporated fuel gauge provides durability and up to a 10.5 hour run-time at 50% load.
- **1 ¼" steel-tube cradle** for added durability and strength.
- **Hour Meter** tracks maintenance intervals.
- **Heavy-duty, never-flat wheels** allow for easy portability.
- **Fold-down handle** for sturdy portability and compact storage.

\*Increases electrical current upon demand; above rated output when starting electric motors


Model 7680-0 UPC: 696471075120  
(49-State)

Model 7683-0 UPC: 696471075137  
(50-State)



**AC Rated Output Running Watts 6500**  
**AC Maximum Output Starting Watts 8125**

### Control Panel

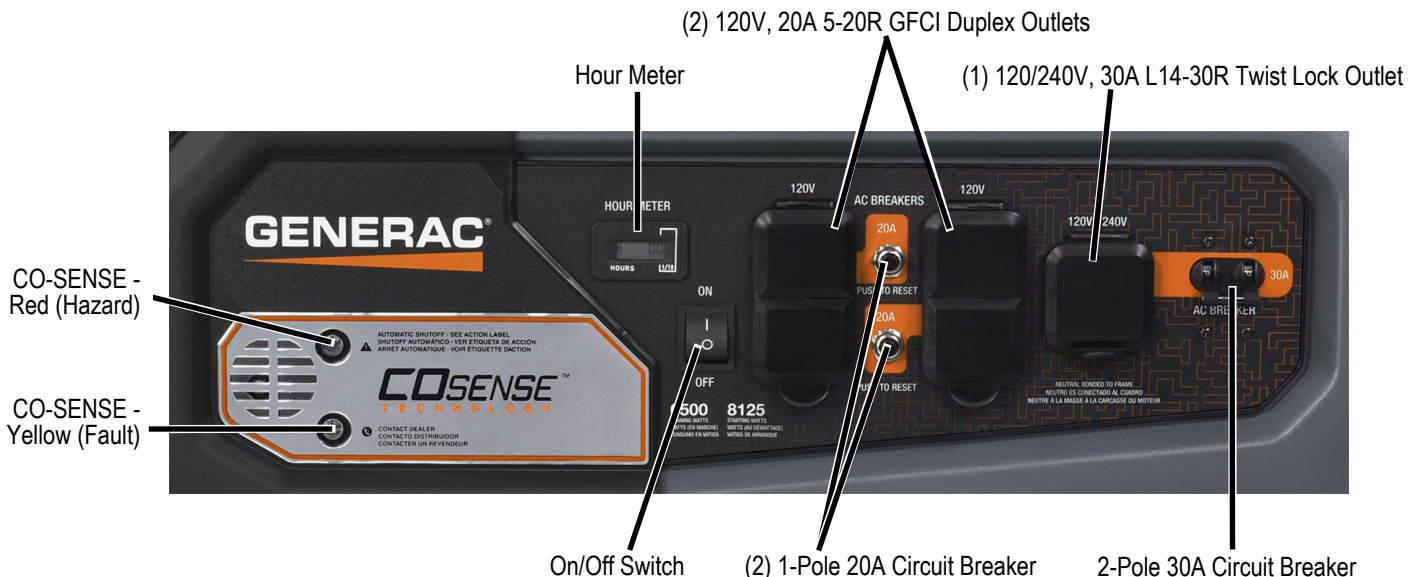

## GP6500

### Specifications

|                                    |                   |
|------------------------------------|-------------------|
| Product Series                     | GP6500            |
| Model Number                       | 7680-0 / 7683-0   |
| Configuration                      | 49 ST / 50 ST     |
| AC Rated Output Running Watts      | 6500              |
| AC Maximum Output Starting Watts   | 8125              |
| Rated AC Voltage                   | 120/240 VAC       |
| Rated AC Frequency                 | 60 Hz             |
| Rated 120/240 VAC Amperage         | 54.2 / 27.1       |
| Engine Displacement                | 389cc             |
| Engine Type                        | OHV               |
| Engine RPM                         | 3600              |
| Recommended Oil                    | 10W-30 / SAE 30   |
| Oil Capacity qt (L)                | 1.06 (1.0)        |
| Lubrication Method                 | Splash            |
| Automatic Voltage Regulation (AVR) | Yes               |
| Choke Location                     | On Engine         |
| Fuel Shut Off                      | On Fuel Tank      |
| Starting Method                    | Recoil Pull Start |
| Low Oil Shutdown                   | Yes               |

|                                       |                                                            |
|---------------------------------------|------------------------------------------------------------|
| Neutral Bonded to Ground              | Yes                                                        |
| Start Switch Type                     | On / Off                                                   |
| Start Switch Location                 | On Control Panel                                           |
| Fuel Gauge                            | Yes                                                        |
| Fuel Tank Capacity gal (L)            | 6.9 (26)                                                   |
| Run Time at 50% of Rated Load (Hours) | 10.5                                                       |
| Handle Style                          | Dual Grip, Single Folding with Lock Pin                    |
| Wheel Type                            | 9.5" Never Flat                                            |
| Warranty- Residential                 | 3 Year Limited                                             |
| Warranty- Commercial                  | 1 Year Limited                                             |
| Included                              | engine oil, oil funnel, handle & wheel kit, owner's manual |

### Dimensions and Weights

|                          |             |
|--------------------------|-------------|
| Length in (mm)           | 27.2 (692)  |
| Width in (mm)            | 27 (684)    |
| Ext. Length in (mm)      | 45.3 (1151) |
| Height in (mm)           | 26.5 (674)  |
| Carton Length in (mm)    | 28.3 (720)  |
| Carton Width in (mm)     | 21.7 (550)  |
| Carton Height in (mm)    | 28 (710)    |
| Unit Weight lbs (kg)     | 172 (78)    |
| Shipping Weight lbs (kg) | 196 (88.9)  |

