



UPC: 019813748337

Weight: 0.0 lbs

Project:

Type:

Prepared By:

Date:

Technical Specifications

Performance

Product Type:

A-Line

Input Wattage:

15W

Lumens:

1,600lm

Efficacy:

107lm/W

L70 Lifespan:

15,000-Hour LED lifespan based on IES LM-70 results

Wattage Equivalency:

100W Incandescent

Compliance

UL Listed:

Suitable for damp locations

Enclosed Fixtures:

Suitable for use in enclosed fixtures

LED Characteristics

Color Temperature:

2700K

Color Accuracy (CRI):

80 CRI

Beam Angle:

230°

Electrical

Power Factor:

0.7

Dimmable:

Yes

Operating Temperature:

-20°C to 45°C (-4°F to 113°F)

Input Voltage:

120V

Operating Frequency:

60 Hz

Construction

Bulb Shape:

A19

Installation

Base Type:

E26 Edison

Other


Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	15.4	5.2	5
PALLET	2016	47.2	39.4	45.7

Dimension

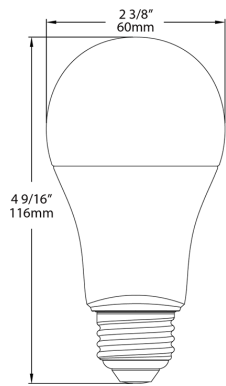

Features

- Replacement for High-output Incandescent or lower wattage metal halide and high pressure sodium lamps
- Rated for use in enclosed and open fixtures in dry or damp locations
- Ideal for post top, bollards, and outdoor corridor lighting
- Suitable for use in a base-up or base-down position

Ordering Matrix

Family		Wattage		Base Type		CRI/Color Temp		Dimmable	
A19	–	15	–	E26	–	827	–	DIM	
		9 = 9W			E26 = E26 Base	830 = 80 CRI, 3000K			
		10 = 10W			GU24 = GU24 Base	827 = 80 CRI, 2700K			
		13 = 13W				840 = 80 CRI, 4000K			
		15 = 15W				850 = 80 CRI, 5000K			
		16 = 16W				835 = 80 CRI, 3500K			
		5 = 5W							
		23 = 23W							