



|                     |              |
|---------------------|--------------|
| <b>Project:</b>     | <b>Type:</b> |
| <b>Prepared By:</b> | <b>Date:</b> |

## Technical Specifications

### Performance

**Product Type:**

A-Line

**Input Wattage:**

15W

**Lumens:**

1,600lm

**Efficacy:**

107lm/W

**L70 Lifespan:**

15,000-Hour LED lifespan based on IES LM-70 results

**Wattage Equivalency:**

100W Incandescent

### Compliance

**UL Listed:**

Suitable for damp locations

**Enclosed Fixtures:**

Suitable for use in enclosed fixtures

### LED Characteristics

**Color Temperature:**

3000K

**Color Accuracy (CRI):**

80 CRI

**Beam Angle:**

230°

### Electrical

**Power Factor:**

0.7

**Dimmable:**

Yes

**Operating Temperature:**

-20°C to 45°C (-4°F to 113°F)

**Input Voltage:**

120V

**Operating Frequency:**

60 Hz

### Construction

**Bulb Shape:**

A19

### Installation

**Base Type:**

E26 Edison

### Other


**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).


### Case and Pallet Dimensions

|        | QTY  | LENGTH (in) | WIDTH (in) | HEIGHT (in) |
|--------|------|-------------|------------|-------------|
| CASE   | 12   | 15.4        | 5.2        | 5           |
| PALLET | 2304 | 41.34       | 40.94      | 45.47       |

### Dimension

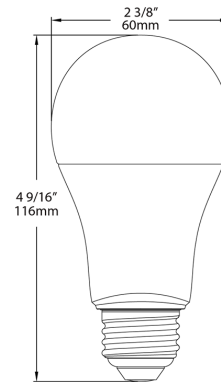

### Light Distribution

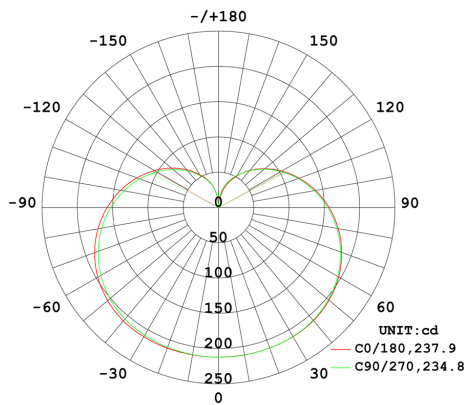

### Features

- Replacement for High-output Incandescent or lower wattage metal halide and high pressure sodium lamps
- Rated for use in enclosed and open fixtures in dry or damp locations
- Ideal for post top, bollards, and outdoor corridor lighting
- Suitable for use in a base-up or base-down position

### Ordering Matrix

| Family | Wattage  | Base Type                          | CRI/Color Temp  | Dimmable                              |
|--------|--|------------------------------------|---|---------------------------------------|
| A19    | 15   | E26                                | 830   | DIM                                   |
|        | 9 = 9W<br>10 = 10W<br>13 = 13W<br>15 = 15W<br>16 = 16W<br>5 = 5W<br>23 = 23W | E26 = E26 Base<br>GU24 = GU24 Base | 830 = 80 CRI, 3000K<br>827 = 80 CRI, 2700K<br>840 = 80 CRI, 4000K<br>850 = 80 CRI, 5000K<br>835 = 80 CRI, 3500K | DIM = Dimmable<br>DIM 120V = Dimmable |