



Type	Constant Current	Watts	52W
120V	N/A	Color Temp	4000K (Neutral)
208V	N/A	Color Accuracy	70 CRI
240V	N/A	L70 Lifespan	100,000 Hours
277V	N/A	Lumens	7,020 lm
Input Watts	52W	Efficacy	135 lm/W

Page 1 of 2

Technical Specifications (continued)

Warranty:
RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Electrical

Drivers:
Constant Current, Class 2 with 6kV surge protection, 480VAC, 50/60 Hz, 480V: 0.12A

THD:
7.07% at 480V

Power Factor:
89% at 480V

Dimensions

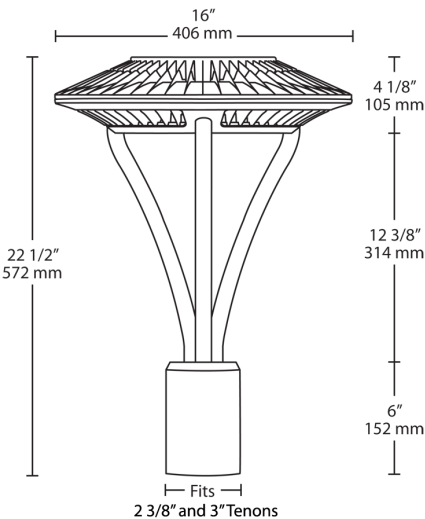

Features

- IES type V (circular) distribution
- 100,000-hour LED lifespan
- Compatible with standard 2 3/8" and 3" tenons
- "Air-Flow" fins for maximum heat dissipation
- 5-Year, No-Compromise Warranty

Ordering Matrix

Family	Distribution	Wattage	Color Temp	Finish	Driver Option	Options	Other Options
ALED	5T	52	N	RG	/480	/PCT4	
5T = Type V							
		26 = 26W	Blank = 5000K Cool	Blank = Bronze	Blank = 120-277V	Blank = No Option	Blank = Standard
		52 = 52W	N = 4000K Neutral	W = White	/480/D10 = 480V w/Dimmable	/LC = Lightcloud	USA = BAA Compliant
		78 = 78W	Y = 3000K Warm	K = Black	/480 = 480V	/PCT = 120-277V Twistlock	
				RG = Gray	/BL = Bi-Level	Photocell	
					/D10 = Dimmable	/PCT4 = 480V Twistlock	
						Photocell	