

Project:	Туре:
Prepared By:	Date:

## **Technical Specifications**

#### Performance

## **Product Type:**

Decorative

#### Input Wattage:

5W

### Wattage Equivalency:

60W Incandescent

# Lumens:

500lm

## Efficacy:

91lm/W

#### L70 Lifespan:

15,000 Hours

## Construction

### **Bulb Shape:**

B11

#### Finish:

Clear

### For Use Outdoors in Open Fixtures:

No

## **LED Characteristics**

## **Color Temperature:**

2700K Soft White

#### Color Accuracy (CRI):

90 CRI

### Beam Angle:

360°

## Installation

## Base Type:

E12

#### Electrical

#### **Power Factor:**

0.7

## Operating Temperature:

-20°C to 45°C (-4°F to 113°F)

## Dimmable:

Yes, down to 10%

### Input Voltage:

120V

## Flicker:

<30%

## Other

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

### Compliance

#### ETL Qualified:

Yes

## California Energy Commission (CEC) Status:


Lawful for Sales in California




## **Case and Pallet Dimensions**

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	6.5	4.9	5
PALLET	3180	38.4	46.3	39.4

## Dimension

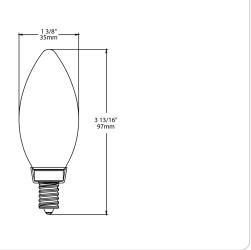

# **Light Distribution**

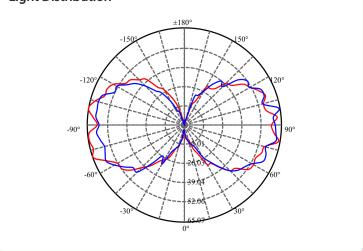

## **Features**

Replacement for conventional decorative lamps

Filament LED construction gives a unique traditional look and feel for decorative and ambient applications

Produces rich and vibrant colors, >90CRI

Rated for use in enclosed and open fixtures in dry and damp locations

Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs

Title 20 Compliant, ENERGY STAR Compliant, UL Listed

Smooth uniform dimming down to 10% (check dimmer compatibility list)

## **Ordering Matrix**

Family	Wattage	Base Type	CRI/Color Temp	Туре	Finish
B11	5	E12	927	F	С
	<b>3</b> = 3W <b>5</b> = 5W		<b>940</b> = 90 CRI, 4000K <b>930</b> = 90 CRI, 3000K <b>927</b> = 90 CRI, 2700K	<b>F</b> = Filament	<b>C</b> = Clear <b>F</b> = Frosted