

Technical Specifications (continued)

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Electrical

Driver:

Constant Current, Class2, 100-277V, 50/60 Hz, 4kV Surge Protection, 700mA, 120V: 0.13A, 208V: 0.09A, 240V: 0.08A, 277V: 0.07A


THD:

9.93% at 120V, 16.07% at 277V

Power Factor:

99.14% at 120V, 92.8% at 277V

Dimensions

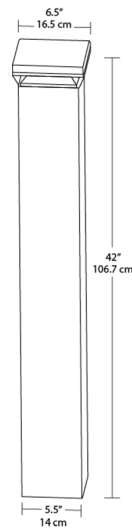

Features

Patented base mount design for super sturdy installation

Durable construction and frosted vandal-resistant polycarbonate lens

4 configurations to provide 360°(24W), 270°(18W), 180°(12W) or 90°(12W) lighting pattern

Precision-engineered optics deliver maximum downward lighting without glare

Four leveling screws provided for easy installation

100,000-hour LED lifespan

Ordering Matrix

Family	Wattage	Color Temp	Finish		Distribution	Driver	Dimming	Backup
BLED	12		W	-				
	18 = 18W 24 = 24W 12 = 12W	Blank = 5000K Cool N = 4000K Neutral Y = 3000K Warm	Blank = Bronze W = White K = Black		Blank = Standard ¹ 180 = 180 degrees (12W only)	Blank = No Option (120-277V) /480 = 480V (24W only)	Blank = None (Standard) /D10 = 0-10V Dimming	Blank = No Battery Backup /E = Battery Backup (24W only) ³ /EC = Battery Backup Cold Weather (24W only) ³

¹ Standard Distributions: 24W = 360Å°, 18W = 270Å°, 12W = 90Å° *

² 480VAC available for 24W fixture versions - offered with /D10 dimming option as standard

³ Only for 24W, 120-277VAC fixture versions