



Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	33W
120V	0.32A	Color Temp	3000K (Warm)
208V	0.176A	Color Accuracy	80 CRI
240V	0.153A	L70 Lifespan	50,000 Hours
277V	0.14A	Lumens	3,530 lm
Input Watts	31.9W	Efficacy	106.0606061

Technical Specifications

Compliance

UL Listed & UL Classified:

Suitable for wet locations

Energy Star Approved:

ENERGY STAR® Version 2.2 Certified

Certification Model Number:

DLC0011

Energy Star ID:

2350048

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Electrical

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

<20%

Power Factor:

≥0.9

THDi:

Produces less than 20% THD

PF:

≥0.9

Input Voltage:

120V through 277V

Operating Frequency (Hz):

50/60Hz

Performance

Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Wattage Equivalency:

2 X 42W CFL

Construction

Air Tight:

Housing certified Air Tight as per ASTM E283

Housing:

Made from precision die-cast aluminum construction, dissipates heat from electrical components

Cold Weather Starting:

The minimum starting temperature is -30°C (-22°F)

Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

Green Technology:

Mercury and UV free. RoHS-compliant components.

Lens:

Diffuse Polystyrene lens produces smooth uniform light that is glare free

Finish:

Matte White

LED Characteristics

Beam Angle:

90°±10°

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Flicker:

Silent and flicker free operations of less than 30%

Installation

Mounting:

Robust retention clips spring loaded tabs ensure the fixture is securely installed. Can be installed in 1/4" to 1 1/2" thick ceilings.

Technical Specifications (continued)

Other

Template:

Template included for easy ceiling cut out

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Accessories:

DLPLATE/T: New Construction or Remodel Plate for T-Grid ceilings for use with 6" and 8" Models

DLPLATE/SJ: New Construction Plate for Stud/Joist mounting for use with 6" and 8" Models


DL8-10GOOF/R/P: 10" Goof Ring for 8" Commercial Downlight

DL8-12GOOF/R/P: 12" Goof Ring for 8" Commercial Downlight


Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	4	20.47	13.58	10
PALLET	224	9.94	9.94	85.04

Dimension

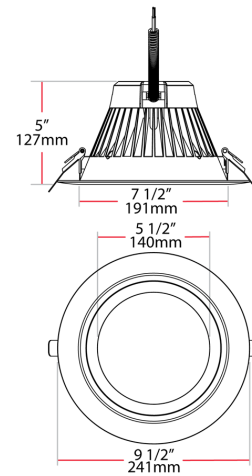

Light Distribution

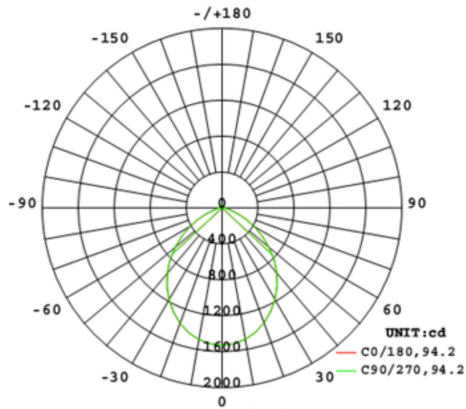

Features

- High Performance LEDs for commercial applications
- Replacement for traditional compact fluorescent recessed downlights
- Compatible with new construction or retrofit installations
- UL wet and Energy Star rated
- Meets air-tight requirements
- Matte white smooth trim finish
- Available in 3 color temperatures: 3000K, 3500K, 4000K
- 0 - 10V dimmable
- Spring loaded retention clips
- 25-inch Flexible conduit
- 5-Year, No-Compromise Warranty

Ordering Matrix

Family	Size	Shape	Wattage	CRI/Color Temp	Driver	Finish
C	8	R	33	830	UNV	W
	6 = 6"	R = Round	12 = 12W	840 = 80 CRI, 4000K	UNV = 120-277V	W = White
	8 = 8"		18 = 18W	835 = 80 CRI, 3500K		
			24 = 24W	830 = 80 CRI, 3000K		
			33 = 33W			