



Date:

Watts	26W
Color Temp	4000K (Neutral)
Color Accuracy	86 CRI
L70 Lifespan	100,000 Hours
Lumens	3,112 lm
Efficacy	103 lm/W

Page 1 of 2

Technical Specifications (continued)

Installation

Mounting Accessory:


Surface mounting box [available here](#).

Optical

BUG Rating:

B1 U0 G0

Dimensions

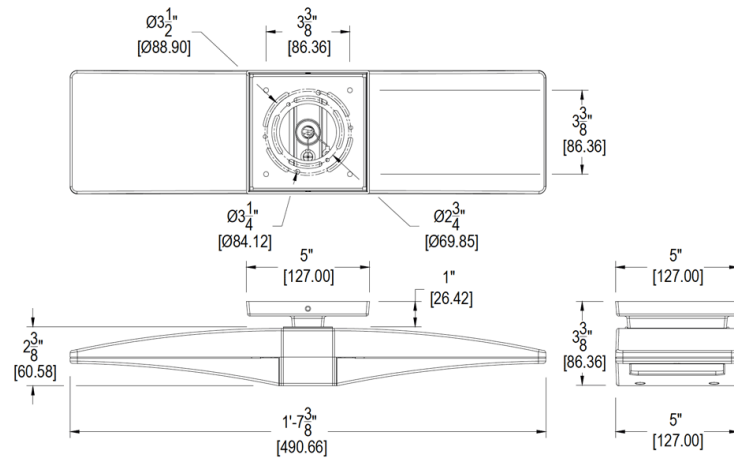

Features

- Flush mount fixture bracket
- Die cast aluminum lens frame with tempered glass and double gasketing
- Fully Shielded, Full Cutoff Optics
- LED Light Engine life delivers 70% of rated lumens at 100,000-hours
- Great for parking garages, canopies, stairwells and entrance ways
- LM-70 and LM-80 tested
- 5-Year, No-Compromise Warranty