

Project:	Type:	Prepared By:	Date:
-----------------	--------------	---------------------	--------------



Features and Benefits

- Replacement for traditional Metal Halide or High Pressure Sodium HID Lamps
- Active Cooling: Internal sensor overheats and engaged will automatically reduce output to 70% rated wattage until the sensor cools and will light up again to 100%
- Integral Driver enables lamp to be wired directly to line voltage without need for an external driver or ballast
- Rated for use in enclosed and open fixtures in dry or damp locations
- 4kV surge protection built in
- 50,000 hour Lifespan
- Environmentally friendly, no mercury used
- UL Listed, UL Classified
- Non-Dimmable
- 5 Year No Compromise Warranty

Technical Specifications		
Performance <hr/> Product Type: HID Replacement Input Wattage: 12W Wattage Equivalency: 50W HID Lumens: 1,650lm Efficacy: 138lm/W L70 Lifespan: 50,000 Hours Construction <hr/> Bulb Shape: Post Top For Use Outdoors in Open Fixtures: Yes	LED Characteristics <hr/> Color Temperature: 3000K Warm White Color Accuracy (CRI): 80 CRI Beam Angle: 360° Installation <hr/> Base Type: E26 Edison Installation Type: Type B, Ballast Bypass Installation Orientation: Universal Installation Electrical <hr/> THD: <20% Power Factor: 0.9	Operating Temperature: -30°C to 60°C Dimmable: No Input Voltage: 100-277V Operating Frequency: 50/60Hz Flicker: <30% Other <hr/> Warranty: RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty .

Technical Specifications (continued)

Compliance

UL Listed:

Yes

UL Classified:

Yes

California Energy Commission (CEC) Status:

Lawful for Sales in California

\


Minimum Compartment Size

Length x Width x Height [in]	Lamp Quantity
6	1

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	12.2	9.1	8
PALLET	900	38.2	38.6	35.4

Wiring Diagram

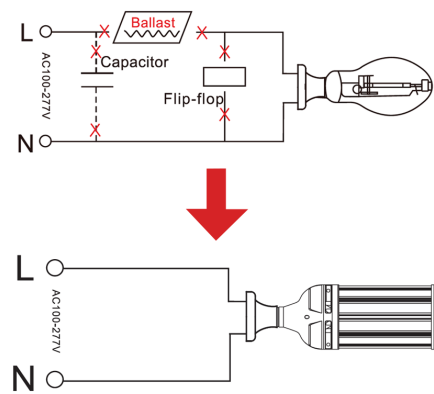

Dimension

