




## Dimensions

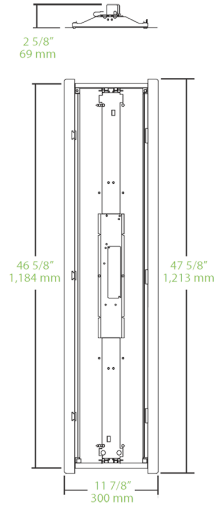

## Features

- Troffer Retrofit can be installed in under 3 minutes by 1 person
- Frosted polycarbonate lens provides a uniform distribution and reduces glare
- 0-10V dimming, standard
- 5-Year, No-Compromise Fixture Warranty and 10-Year, No-Compromise Lightcloud Warranty

## Ordering Matrix

Family	Size		Wattage	Color Temp	Finish	CRI	Dimming Driver	Options
RTLED	1X4	-	29	Y	W		/D10	/LC
	2X2 = 2'x2'		19 = 19W (2x2, 1x4)	Y = 3000K Warm	W = White	Blank = 80 CRI	/D10 = 0-10V Dimming	Blank = No Options
	2X4 = 2'x4'		29 = 29W (2x2, 1x4)	YN = 3500K Warm Neutral		/HC = 90 CRI (4000K only) <sup>1</sup>		/LC = Lightcloud
	1X4 = 1'x4'		39 = 39W (2x4)					/E2 = Battery Backup
			49 = 49W (2x4)	N = 4000K Neutral				/MVS = Microwave Occupancy Sensor
				Blank = 5000K Cool				/MVS/E2 = Microwave Occupancy Sensor w/Battery Backup

<sup>1</sup> 4000K only