

**BALDOR • RELIANCE**

---

# Customer information packet

## DRX281564T

15HP, 1175//985RPM, 3PH, 60HZ, 284T, XPFC, F1

Class - CLI GP C,D

Division - Division I

## Specifications

Enclosure	XPFC
Frame	284T
Frame Material	Iron
Frequency	50.00 Hz 60.00 Hz
Haz Area Class and Group	CLI GP C,D
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	10.000 HP @ 50 HZ 15.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	380.0 V @ 50 HZ 230.0 V @ 60 HZ 190.0 V @ 50 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA EEV UL
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	42.000 A @ 230.0 V 42.000 A @ 208.0 V 36.000 A @ 190.0 V 21.000 A @ 460.0 V 18.000 A @ 380.0 V
Design Code	A
Drip Cover	No Drip Cover

## Part detail

Revision	H
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	10WGY561
Layout	10LY-000-549
Eff. date	01-31-2025
CD Diagram	CD0180
Poles	06
Leads	9#10
Proprietary	False
Created date	05-30-2019

<b>Duty Rating</b>	CONT
<b>Efficiency @ 100% Load</b>	91.7 %
<b>Electrically Isolated Bearing</b>	Not Electrically Isolated
<b>Feedback Device</b>	NO FEEDBACK
<b>Haz Area Temp Code</b>	T3C
<b>Heater Indicator</b>	No Heater
<b>High Voltage Full Load Amps</b>	18.0 a
<b>Insulation Class</b>	F
<b>Inverter Code</b>	Inverter Duty
<b>IP Rating</b>	NONE
<b>KVA Code</b>	H
<b>Lifting Lugs</b>	Standard Lifting Lugs
<b>Locked Bearing Indicator</b>	Locked Bearing
<b>Max Speed</b>	1800 rpm
<b>Motor Lead Termination</b>	Flying Leads
<b>Motor Standards</b>	NEMA
<b>Motor Type</b>	1046M
<b>Mounting Arrangement</b>	F1
<b>Number of Poles</b>	6
<b>Overall Length</b>	28.61 IN
<b>Power Factor</b>	73
<b>Product Family</b>	Hazardous Location Motor
<b>Pulley Face Code</b>	Standard
<b>Rodent Screen</b>	None
<b>RoHS Status</b>	ROHS NON-COMPLIANT
<b>Service Factor</b>	1.00
<b>Shaft Diameter</b>	1.875 IN
<b>Shaft Ground Indicator</b>	No Shaft Grounding
<b>Shaft Rotation</b>	Reversible
<b>Speed</b>	1175 rpm
<b>Speed Code</b>	Single Speed
<b>Starting Method</b>	Direct on line
<b>Thermal Device - Bearing</b>	None
<b>Thermal Device - Winding</b>	Normally Closed Thermostat

<b>Vibration Sensor Indicator</b>	<b>No Vibration Sensor</b>
<b>Winding Thermal 1</b>	<b>None</b>
<b>Winding Thermal 2</b>	<b>None</b>

**Nameplate**

NP1401XPSLEV										
<b>NO.</b>		<b>CC</b>	010A							
<b>S/N</b>		<b>TEMP CODE</b>	T3C							
<b>SPEC.</b>	10-0000-0768		<b>INV.TYPE</b>	PWM						
<b>CAT.NO.</b>	DRX281564T		<b>C HP FR</b>	60	<b>C HP TO</b>	90				
<b>HP</b>	15//10		<b>CT HZ FROM</b>	6	<b>CT HZ TO</b>	60				
<b>VOLTS</b>	230/460//190/380		<b>VT HZ FROM</b>	6	<b>VT HZ TO</b>	60				
<b>AMPS</b>	42/21//36/18		<b>MAG CUR</b>	22/11						
<b>RPM</b>	1175//985		<b>MX RPM</b>	1800						
<b>HZ</b>	60//50	<b>PH</b>	3	<b>CL</b>	F	<b>NOM.EFF.</b>	91.7			
<b>SER.F.</b>	1.00	<b>DES</b>	A	<b>SL HZ</b>	1.3	<b>WK2</b>	4.9			
<b>FRAME</b>	284T	<b>RATING</b>	40C AMB-CONT							
	55C AMB @ 1.0 SF, 60C RISE									
	1.15SF ON SINEWAVE									

**AC Induction Motor Performance Data**

Record # 67038

Typical performance - not guaranteed values

<b>Winding:</b> 10WGY561-R013		<b>Type:</b> 1046M		<b>Enclosure:</b> XPFC	
<b>Nameplate Data</b>			<b>460 V, 60 Hz: High Voltage Connection</b>		
<b>Rated Output (HP)</b>	15	<b>Full Load Torque</b>	66.68 LB-FT		
<b>Volts</b>	230/460	<b>Start Configuration</b>	direct on line		
<b>Full Load Amps</b>	42/21	<b>Breakdown Torque</b>	213 LB-FT		
<b>R.P.M.</b>	1175	<b>Pull-up Torque</b>	93.1 LB-FT		
<b>Hz</b>	60 <b>Phase</b>	3	<b>Locked-rotor Torque</b>	114 LB-FT	
<b>NEMA Design Code</b>	A	<b>KVA Code</b>	H	<b>Starting Current</b>	144 A
<b>Service Factor (S.F.)</b>	1	<b>No-load Current</b>	12.4 A		
<b>NEMA Nom. Eff.</b>	91.7	<b>Power Factor</b>	73	<b>Line-line Res. @ 25°C</b>	0.502 Ω
<b>Rating - Duty</b>	40C AMB-CONT		<b>Temp. Rise @ Rated Load</b>	43°C	
			<b>Locked-rotor Power Factor</b>	32.9	
			<b>Rotor inertia</b>	5.63 lb-ft <sup>2</sup>	

**Load Characteristics 460 V, 60 Hz, 15 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>
<b>Power Factor</b>	32	52	65	72	76	78
<b>Efficiency</b>	83	89.4	91.3	91.7	91.4	90.8
<b>Speed</b>	1196	1193	1189	1185	1181	1177
<b>Line amperes</b>	13.2	15.1	17.9	21.3	25.3	29.6


ABB Motors and Mechanical Inc.

WINDING # 10WGY561

Typical performance - not guaranteed values.

15 HP 3 PH 60 HZ 1175 RPM 460 V 1046M

TORQUES (LB-FT): PO=213 PU=93.1 LR=114 LRA=144

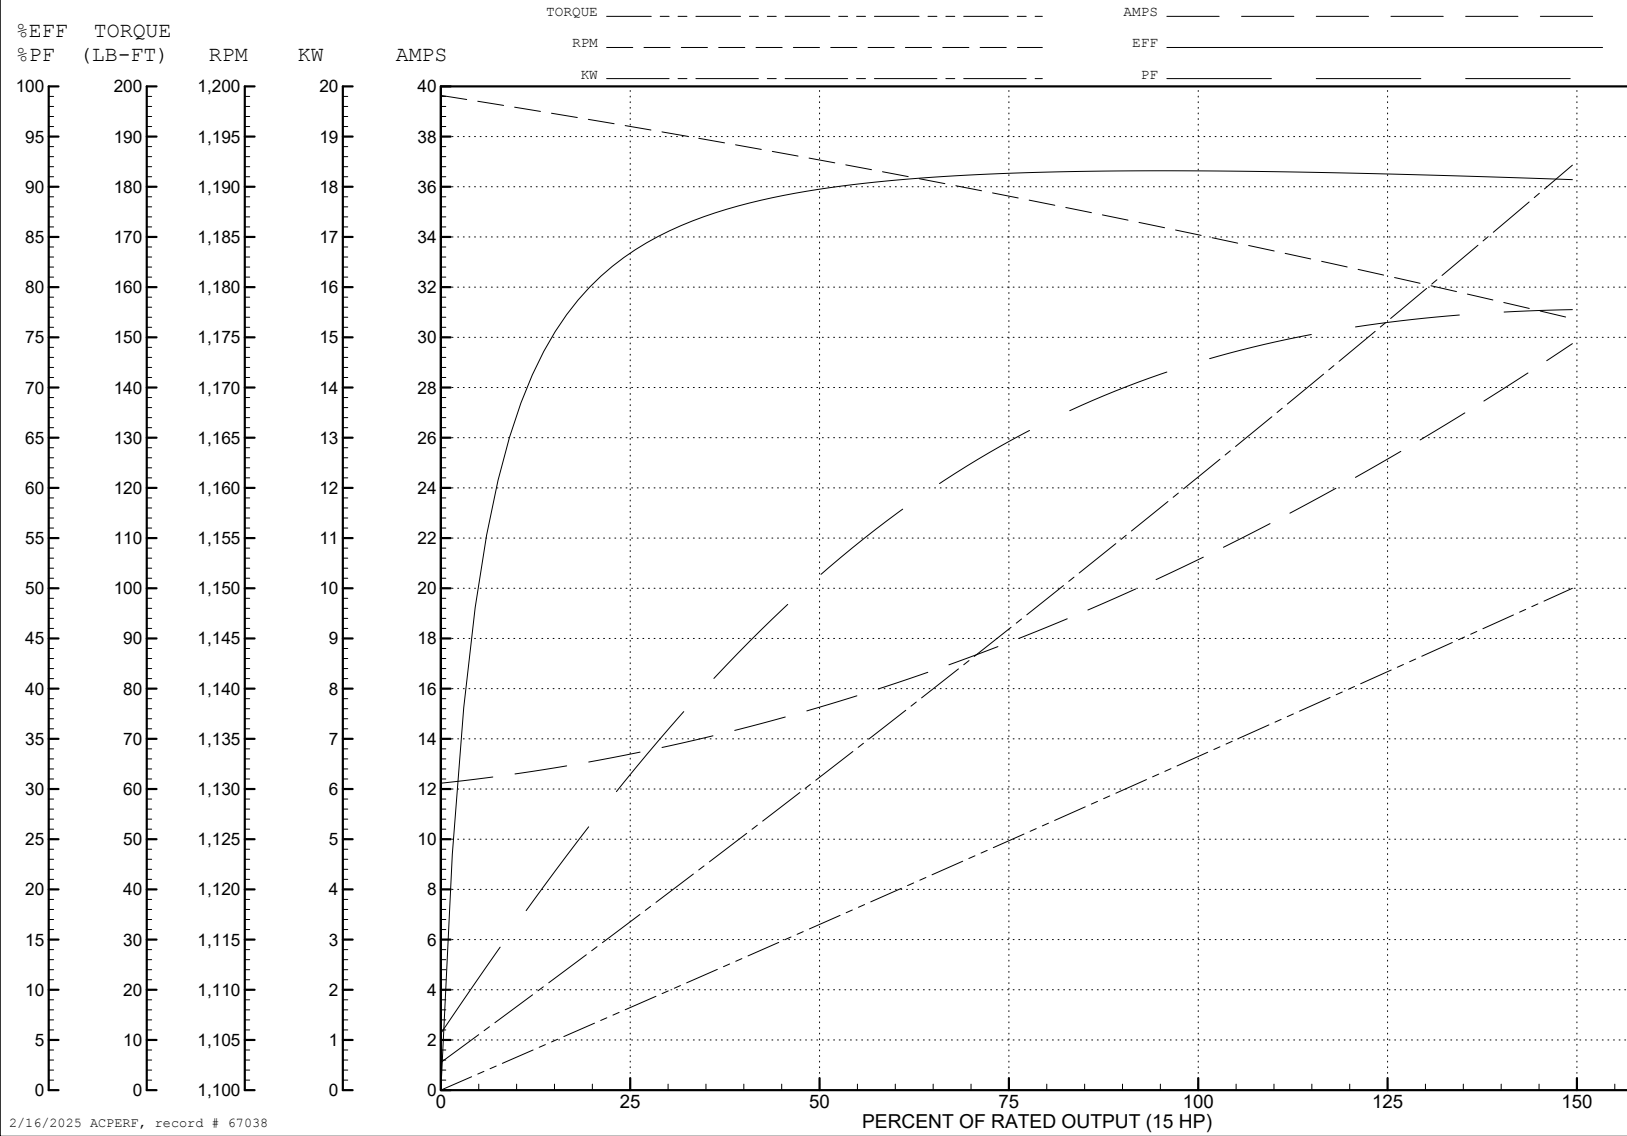

2/16/2025 ACPERF, record # 67038

**AC Induction Motor Performance Data**

Record # 75699

Typical performance - not guaranteed values

<b>Winding:</b> 10WGY561-R010		<b>Type:</b> 1046M		<b>Enclosure:</b> XPFC		
<b>Nameplate Data</b>			<b>380 V, 50 Hz: High Voltage Connection</b>			
<b>Rated Output (HP)</b>	15//10		<b>Full Load Torque</b>	53.33 LB-FT		
<b>Volts</b>	230/460//190/380		<b>Start Configuration</b>	direct on line		
<b>Full Load Amps</b>	42/21//36/18		<b>Breakdown Torque</b>	205 LB-FT		
<b>R.P.M.</b>	1175//985		<b>Pull-up Torque</b>	95.7 LB-FT		
<b>Hz</b>	60//50	<b>Phase</b>	3	<b>Locked-rotor Torque</b>	117 LB-FT	
<b>NEMA Design Code</b>	A		<b>KVA Code</b>	H	<b>Starting Current</b>	139 A
<b>Service Factor (S.F.)</b>	1			<b>No-load Current</b>	12.06 A	
<b>NEMA Nom. Eff.</b>	91.7	<b>Power Factor</b>	73	<b>Line-line Res. @ 25°C</b>	0.502 Ω	
<b>Rating - Duty</b>	40C AMB-CONT			<b>Temp. Rise @ Rated Load</b>	34°C	
				<b>Locked-rotor Power Factor</b>	36.5	
				<b>Rotor inertia</b>	5.63 lb-ft <sup>2</sup>	

**Load Characteristics 380 V, 50 Hz, 10 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>
<b>Power Factor</b>	28	46	59	67	72	76
<b>Efficiency</b>	80.7	88.1	90.4	91.1	91	90.5
<b>Speed</b>	997	994	991	988	985	981
<b>Line amperes</b>	12.64	14.01	16.05	18.57	21.57	24.81


ABB Motors and Mechanical Inc.

WINDING # 10WGY561


Typical performance - not guaranteed values.

10 HP 3 PH 50 HZ 988 RPM 380 V 1046M


TORQUES (LB-FT): PO=205 PU=95.7 LR=117 LRA=139

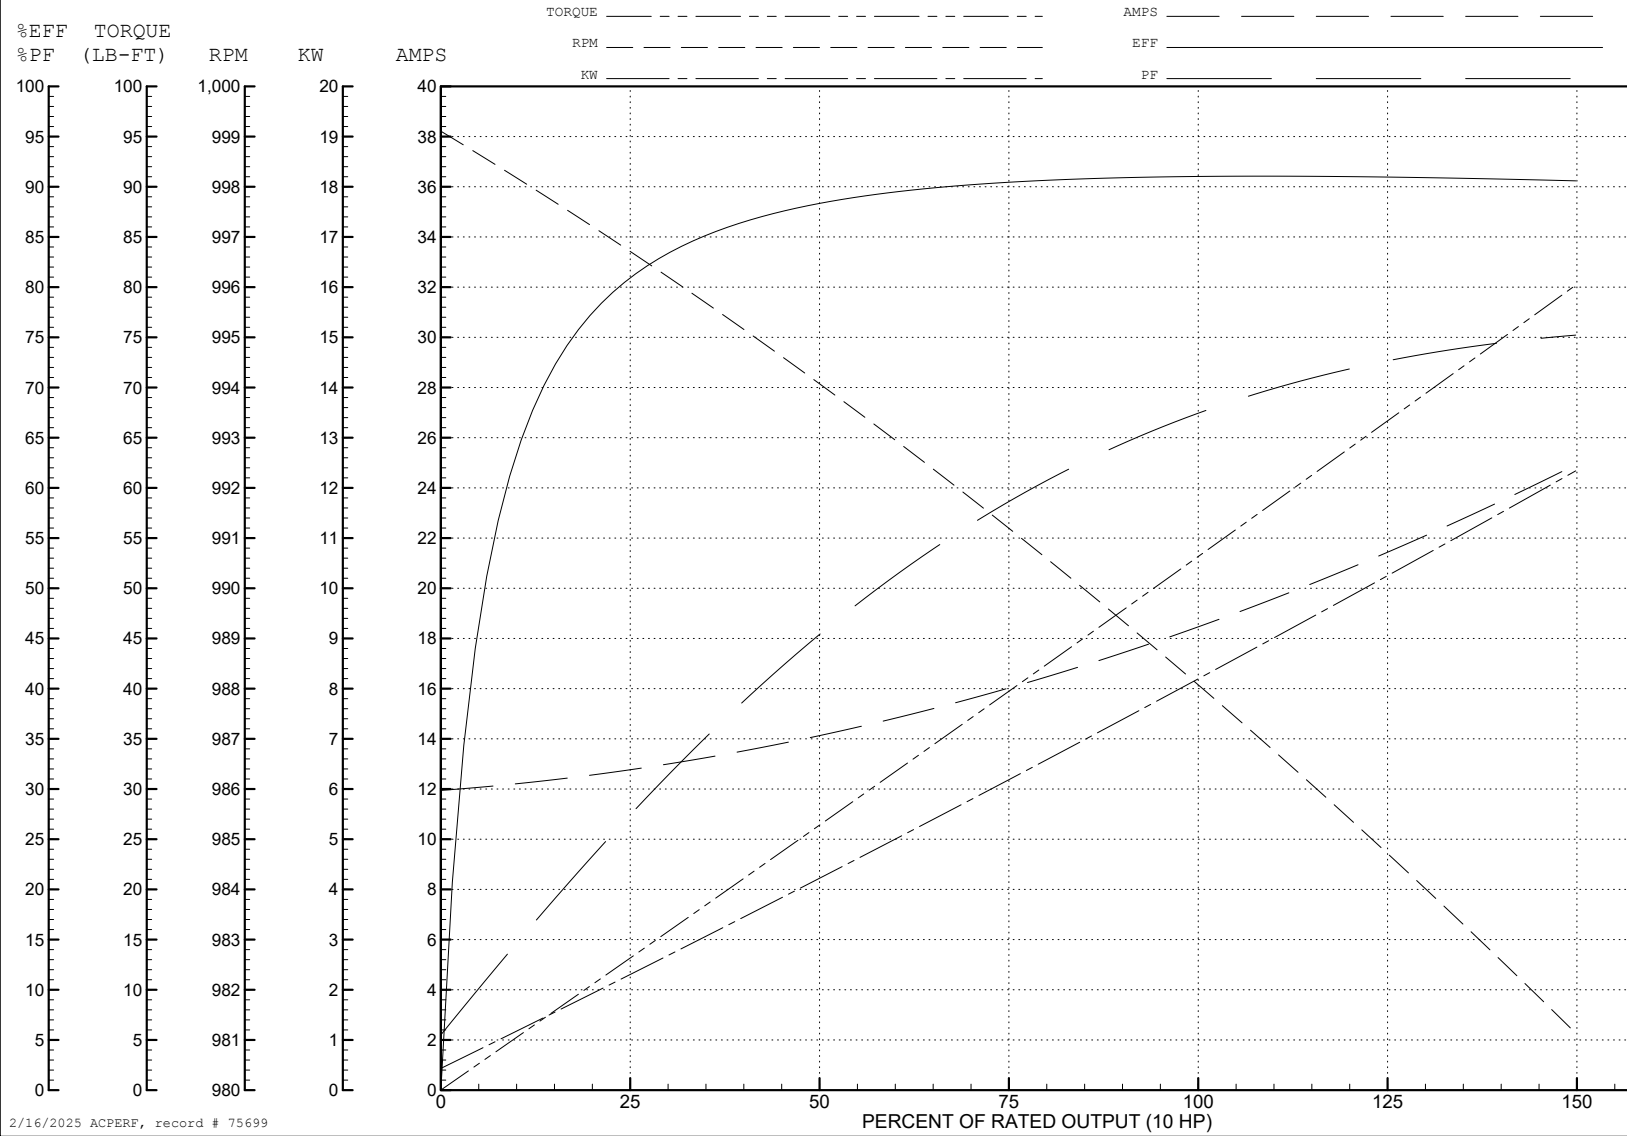


2/16/2025 ACPERF, record # 75699

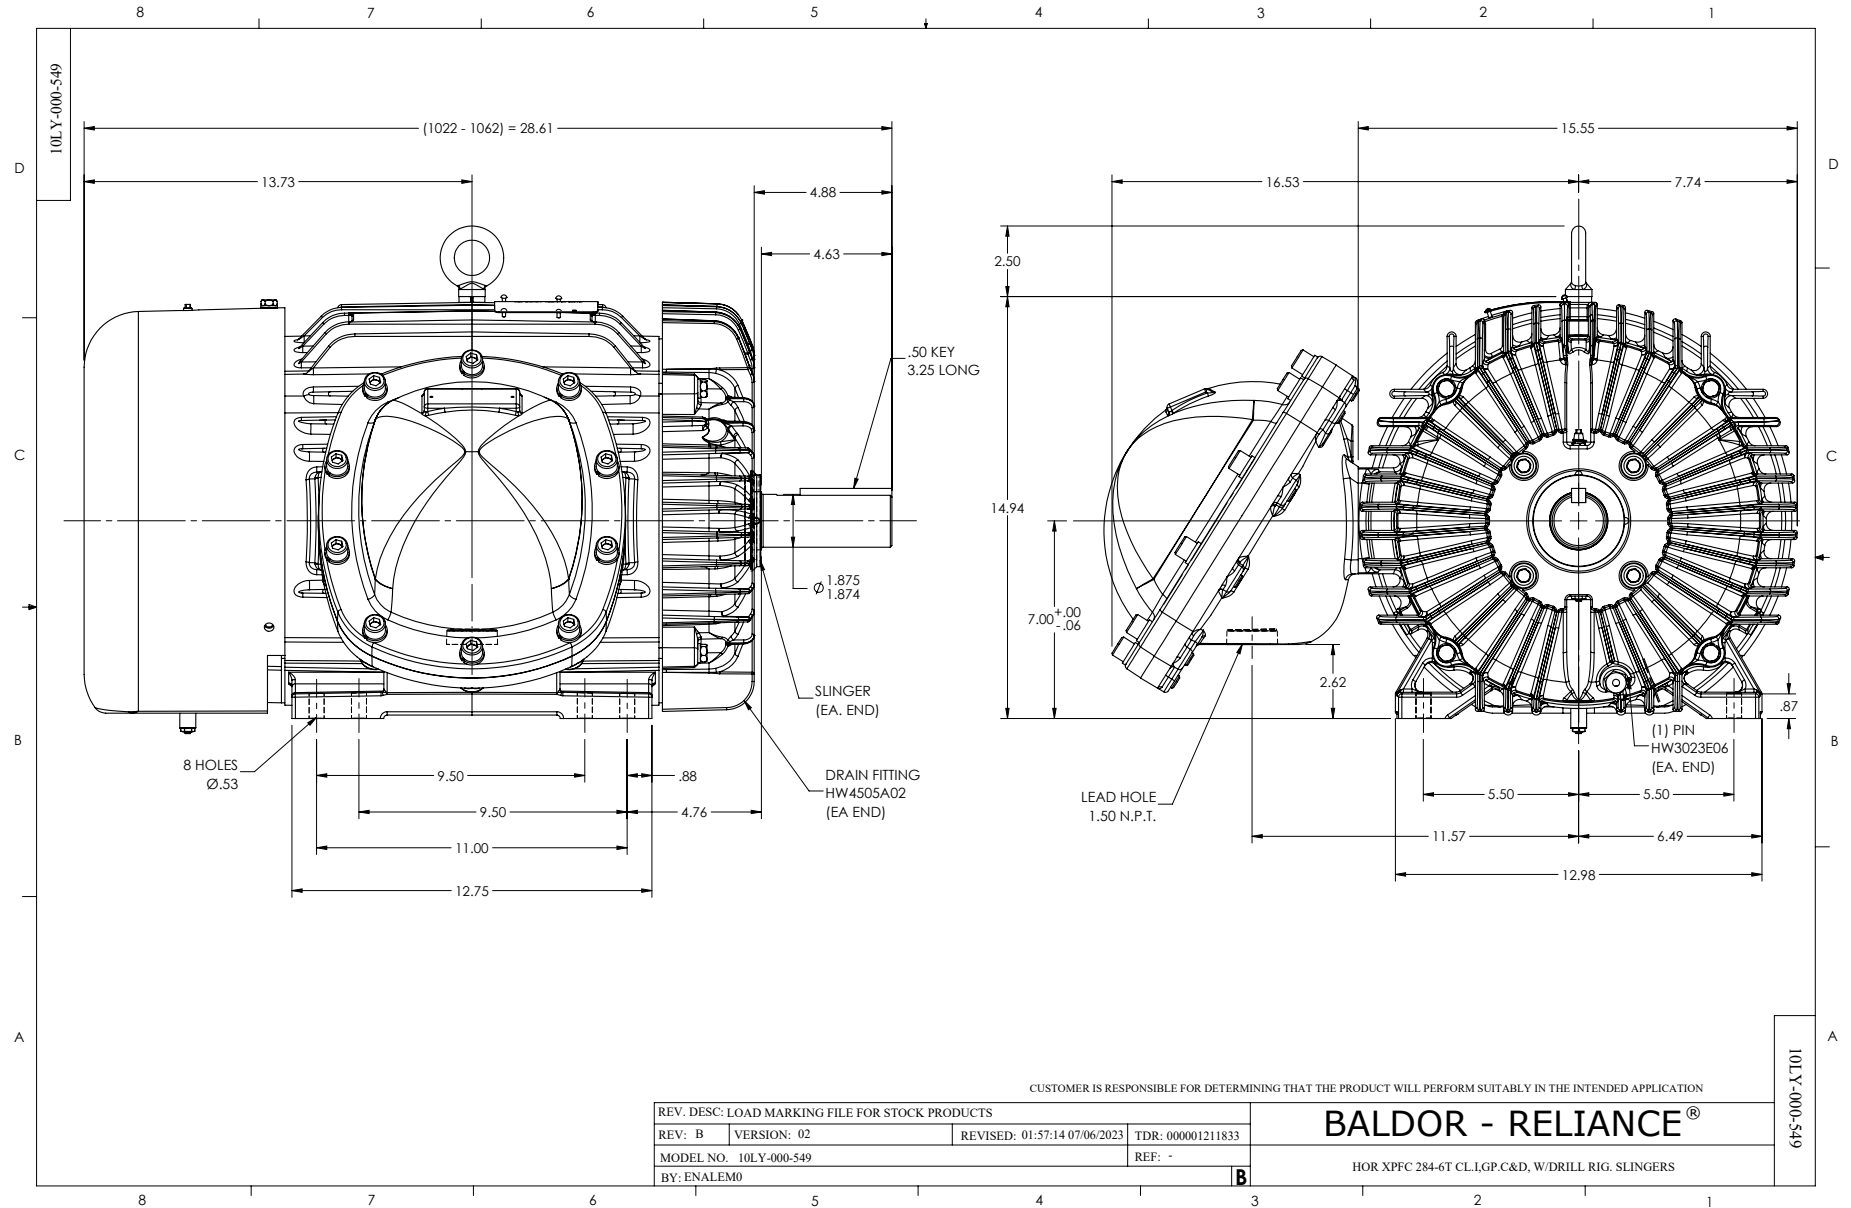


CD0180

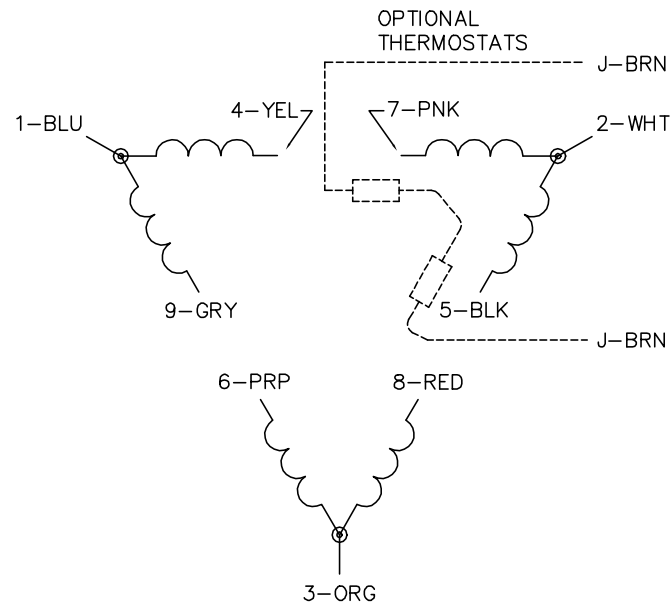

LOW VOLTAGE  
(2D)

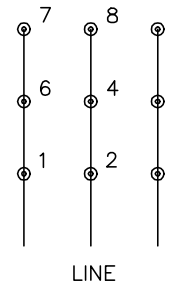

HIGH VOLTAGE  
(1D)

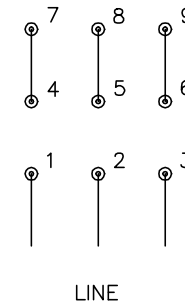

**NOTES:**

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: D	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\148	REVISED: 10:25:29 02/19/2019	BY: ENBRIRO
MTL: -	© □	

**BALDOR - RELIANCE®**

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1