



Customer information packet

EM3667T-G

1.5HP, 1170RPM, 3PH, 60HZ, 182T, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	182T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	1.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA CSA EEV NEMA PREMIUM UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	5.000 A @ 230.0 V 2.500 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	87.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	2.5 a

Part detail

Revision	B
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	06WGW969
Layout	06LYG729
Eff. date	04-29-2024
CD Diagram	CD0005
Poles	06
Leads	9#16
Proprietary	False
Created date	04-09-2019

Insulation Class	H
Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	K
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0630M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	15.23 IN
Power Factor	65
Product Family	General Purpose
Pulley Face Code	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Speed	1170 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3441LUA

CAT.NO.	EM3667T-G										
SPEC	06-0000-0084										
HP	1.5										
VOLTS	230/460										
AMPS	5/2.5										
RPM	1170										
FRAME	182T			HZ	60			PH	3		
SF	1.15		CODE	K	DES	B		CLASS	H		
NEMA NOM. EFF	87.5			PF	65						
RATING	40C AMB-CONT										
CC	010A										
ENCL	TEFC		SER								
DE	6206				ODE	6205					
VPWM INVERTER READY											
CT6-60H(10:1)VT3-60H(20:1											
	50HZ 1.5HP 190/380V 5.8/2.9A										

AC Induction Motor Performance Data

Record # 75471

Typical performance - not guaranteed values

Winding: 06WGW969-R006			Type: 0630M		Enclosure: TEFC		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		1.5	Full Load Torque		6.77 LB-FT		
Volts		230/460	Start Configuration		direct on line		
Full Load Amps		5/2.5	Breakdown Torque		24 LB-FT		
R.P.M.		1170	Pull-up Torque		12.5 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		15.8 LB-FT	
NEMA Design Code		B	KVA Code	K	Starting Current		16.19 A
Service Factor (S.F.)		1.15	No-load Current		1.63 A		
NEMA Nom. Eff.		87.5	Power Factor	65	Line-line Res. @ 25°C		7.01 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		26°C
S.F. Amps					Temp. Rise @ S.F. Load		31°C
					Locked-rotor Power Factor		30.4
					Rotor inertia		0.282 LB-FT2

Load Characteristics 460 V, 60 Hz, 1.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	27	44	56	64	69	73	67
Efficiency	76.3	84.8	86.8	87.5	87.1	85.8	87.3
Speed	1194	1187	1179	1172	1163	1153	1167
Line amperes	1.7	1.9	2.18	2.51	2.92	3.38	2.76


ABB Motors and Mechanical Inc.


WINDING # 06WGW969

Typical performance - not guaranteed values.




1.5 HP 3 PH 60 HZ 1170 RPM 460 V 0630M

TORQUES (LB-FT): PO=24 PU=12.5 LR=15.8 LRA=16.19

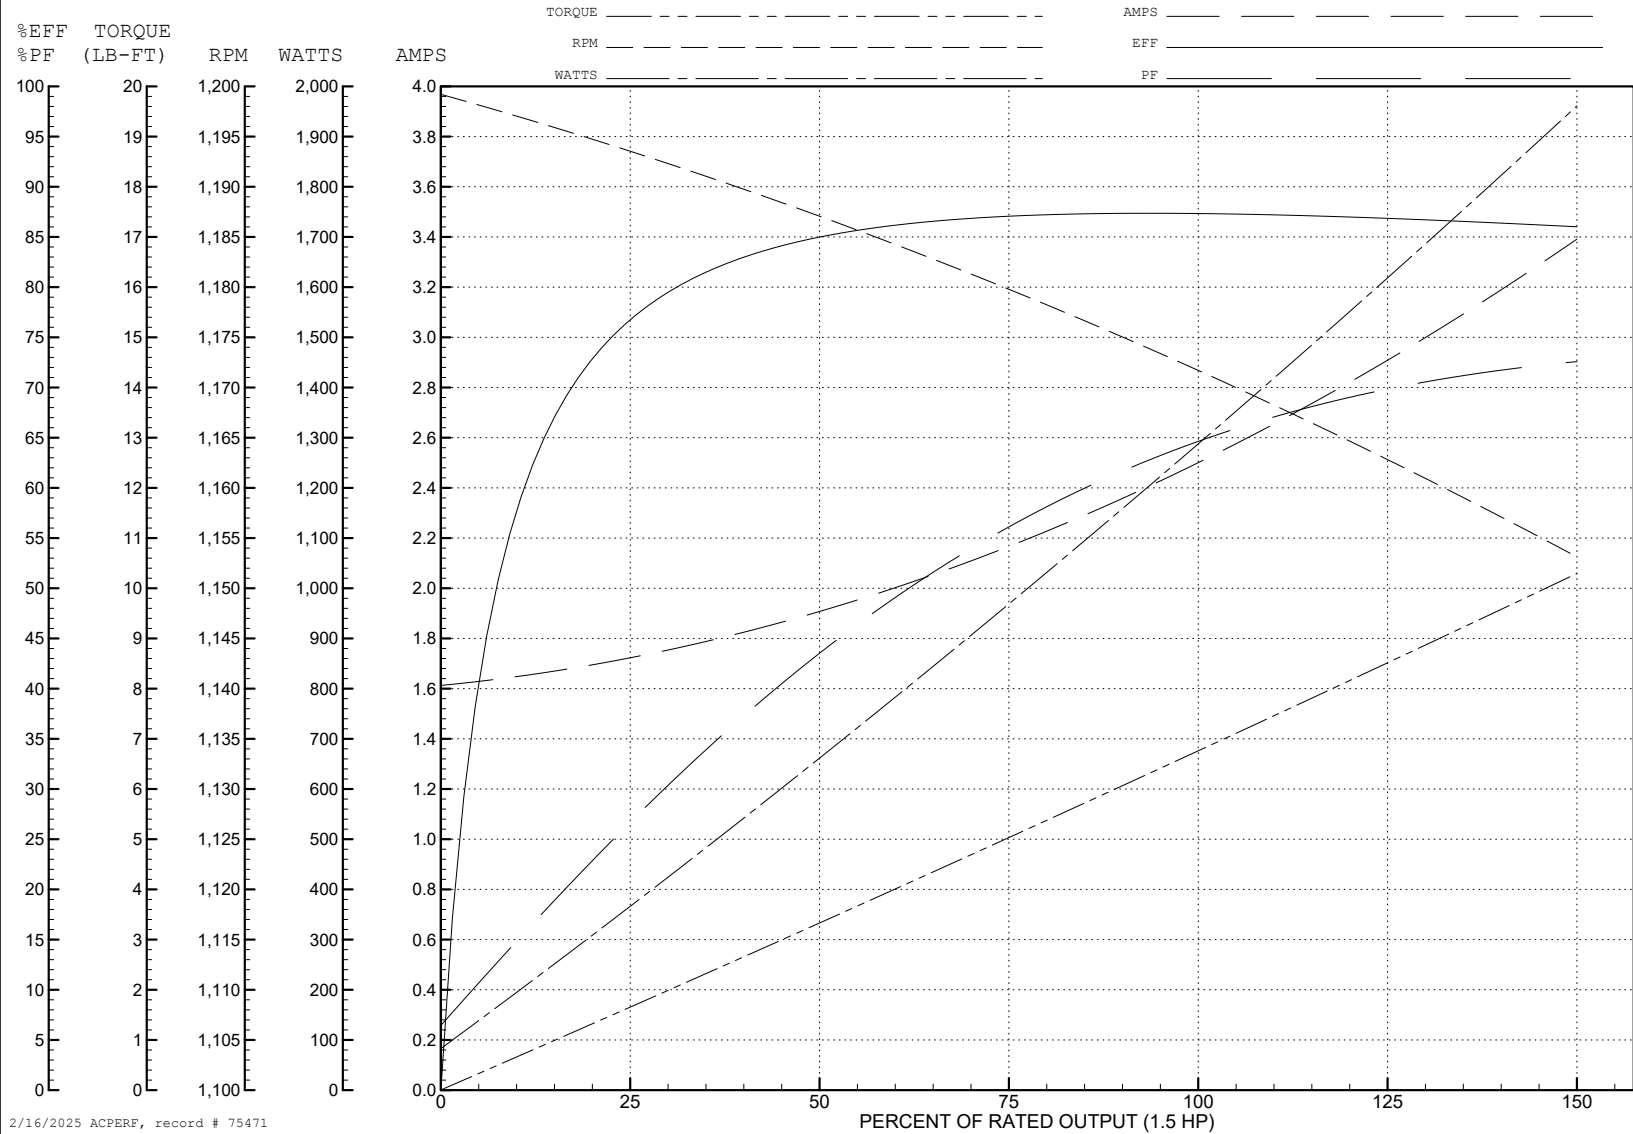

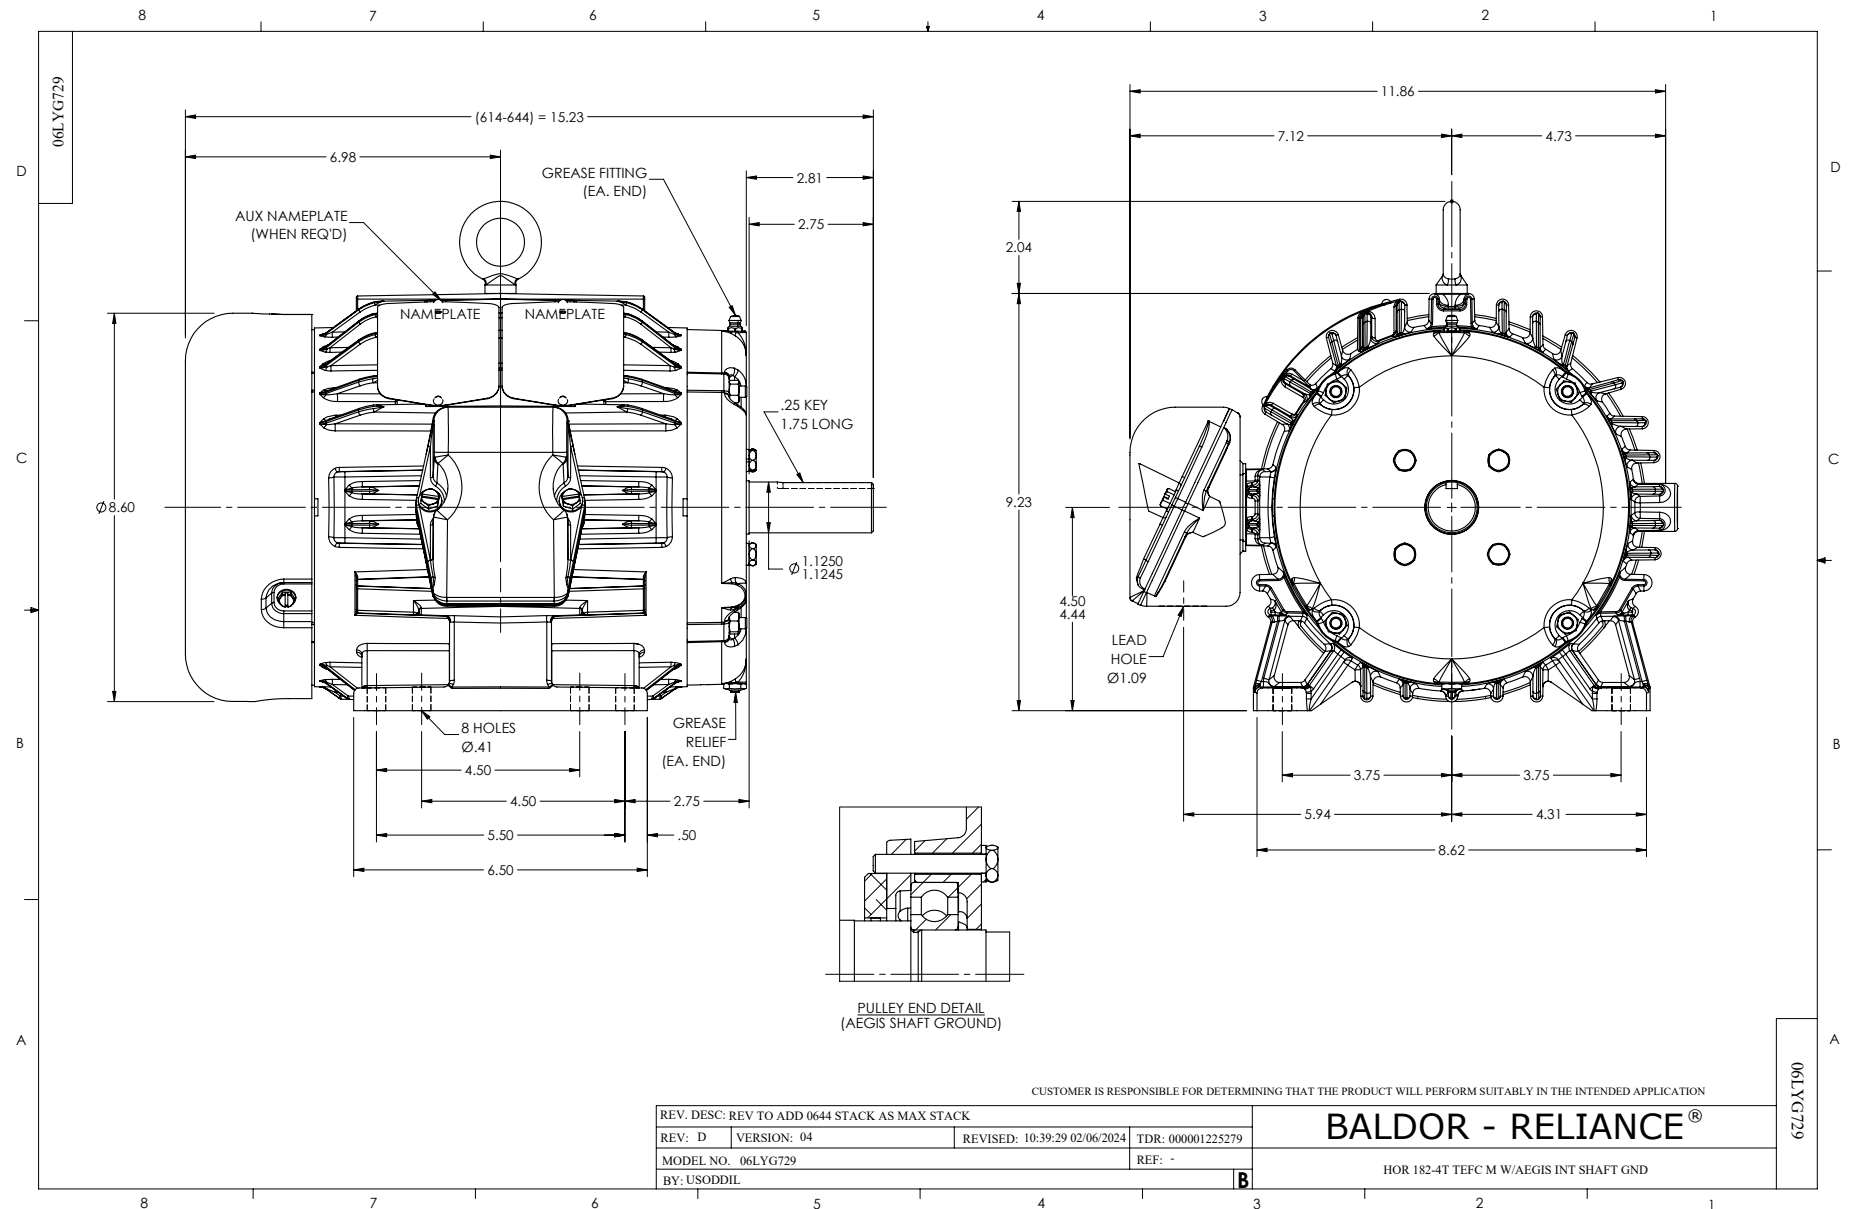

CD0005

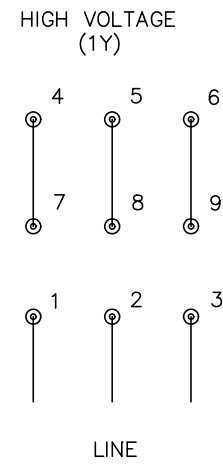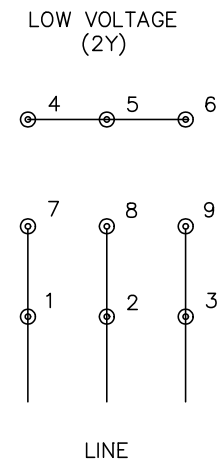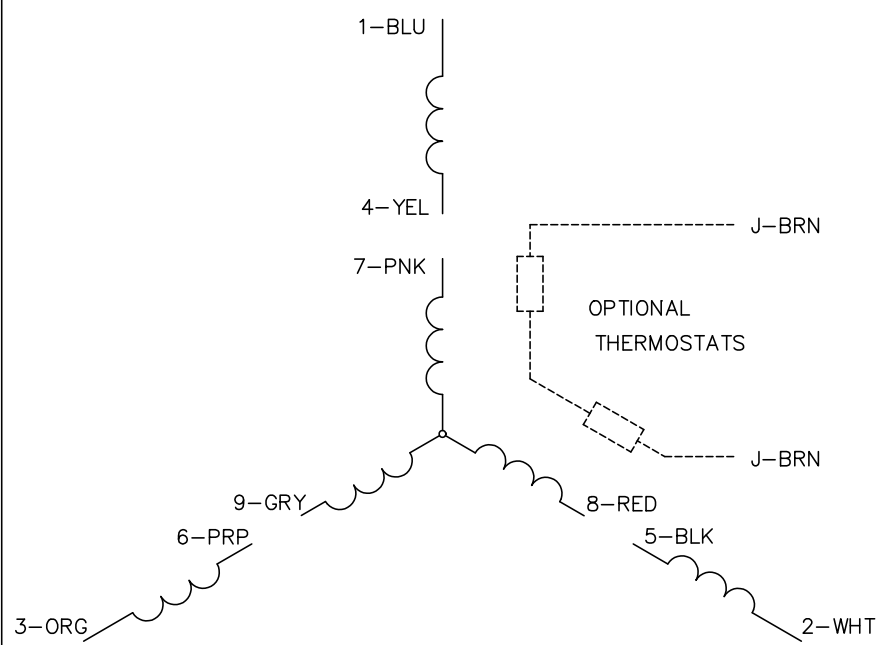

- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005