



**The Timken Company**


4500 Mt Pleasant St. NW

N. Canton, OH 44720

**Phone:** (234) 262-3000

**E-Mail:** [CustomerCAD@timken.com](mailto:CustomerCAD@timken.com) • **Web site:** [www.timken.com](http://www.timken.com)

## Part Number QMC15J211S, Eccentric Piloted Flange Cartridge

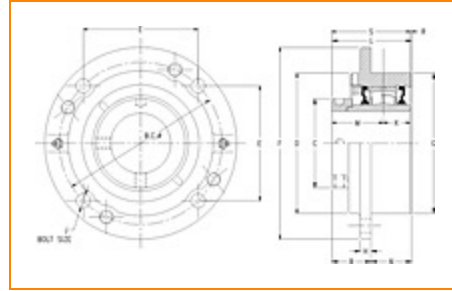

[Specifications](#) | [Dimensions](#) | [Radial and Thrust Factors](#) | [Engineering Seal Speed](#) | [Engineering Bearing Attributes](#) | [Engineering Internal Radial Clearance](#)

### Specifications

**Engineering Group** Mounted Bearing

**Bearing Number** 22215

**Shaft Size** 2 11/16 in

**Shaft Size Type** Imperial

**Full Timken Part Number**

- QMC15J211SB
- QMC15J211SC
- QMC15J211SEB
- QMC15J211SEC
- QMC15J211SEM
- QMC15J211SEN
- QMC15J211SEO
- QMC15J211SET
- QMC15J211SM
- QMC15J211SN
- QMC15J211SO
- QMC15J211ST



<b>Locking Style</b>	Eccentric
<b>Housing Construction</b>	Piloted Flange Cartridge
<b>UPC Code</b>	0883450059626 0883450059633 0883450059657 0883450059664 0883450059671 0883450059688 0883450059695 0883450059701 0883450165662 0883450166089 0883450257923 0883450258302

## Dimensions

<b>Dimension BC</b>	7-1/2 in 190.5 mm
<b>Dimension B Exp</b>	2.54 in 64.5 mm
<b>Dimension B Fix</b>	2.46 in 62.5 mm
<b>Dimension C</b>	4.01 in 101.9 mm
<b>Dimension D</b>	6.38 in 162.1 mm
<b>Dimension E</b>	5.3 in 134.6 mm
<b>Dimension F</b>	8-3/4 in 222.3 mm
<b>Dimension G</b>	6.375 in 161.9 mm

<b>Dimension H</b>	0.81 in 20.6 mm
<b>Dimension J (Bolt Size)</b>	0.625 in 16 mm
<b>Dimension K</b>	1.25 in 31.8 mm
<b>Dimension L Exp</b>	3.8 in 96.5 mm
<b>Dimension L Fix</b>	3.72 in 94.5 mm
<b>Dimension M</b>	2.37 in 60.2 mm
<b>Dimension N</b>	1.25 in 31.8 mm
<b>Dimension R</b>	0.09 in 2.3 mm
<b>Dimension S</b>	3.62 in 91.9 mm

## Radial and Thrust Factors

<b>C0 - Static Load</b>	54100 lbf 240000 N
<b>C - Dynamic Load (Basic)</b>	49900 lbf 222000 N
<b>e - Geometry Factor</b>	0.22
<b>Y1 - Geometry Factor</b>	3.14
<b>Y2 - Geometry Factor</b>	4.67

## Engineering Seal Speed

<b>Oil Lubrication - M/N Seal</b>	1600 rpm
-----------------------------------	----------

<b>Oil Lubrication - T Seal</b>	2900 rpm
---------------------------------	----------

<b>Oil Lubrication - B/C/O Seal</b>	1300 rpm
-------------------------------------	----------

<b>Grease Lubrication - M/N Seal</b>	1600 rpm
--------------------------------------	----------

<b>Grease Lubrication - T Seal</b>	2400 rpm
------------------------------------	----------

<b>Grease Lubrication - B/C/O Seal</b>	1300 rpm
--	----------

## Engineering Bearing Attributes

<b>Float</b>	0.083 in 2.108 mm
--------------	----------------------

<b>Shaft Tolerance</b>	0.0020 in 0.051 mm
------------------------	-----------------------




## Engineering Internal Radial Clearance

<b>Eng Internal Radial Clearance - Min</b>	0.0020
--	--------

<b>Eng Internal Radial Clearance - Max</b>	0.0031
--	--------

<b>Pre Install Clearance Min</b>	0.0020 in 0.050 mm
----------------------------------	-----------------------

<b>Pre Install Clearance Max</b>	0.0031 in 0.080 mm
----------------------------------	-----------------------

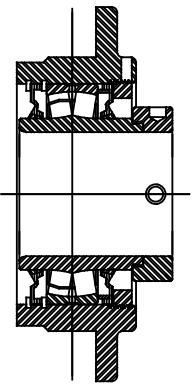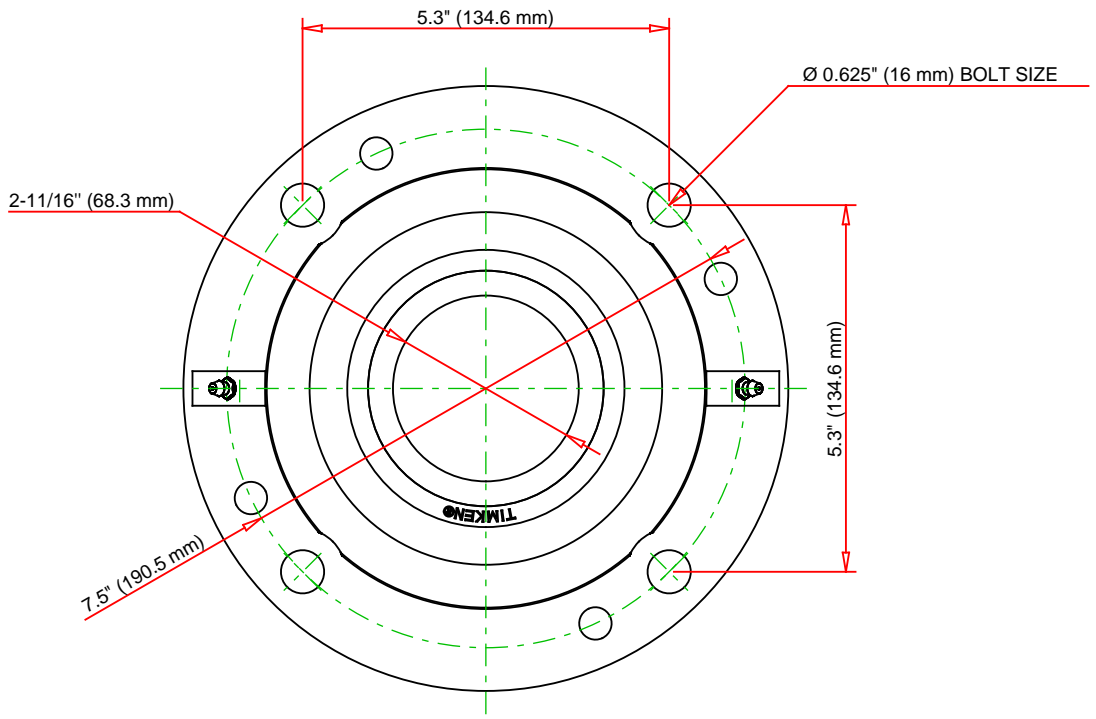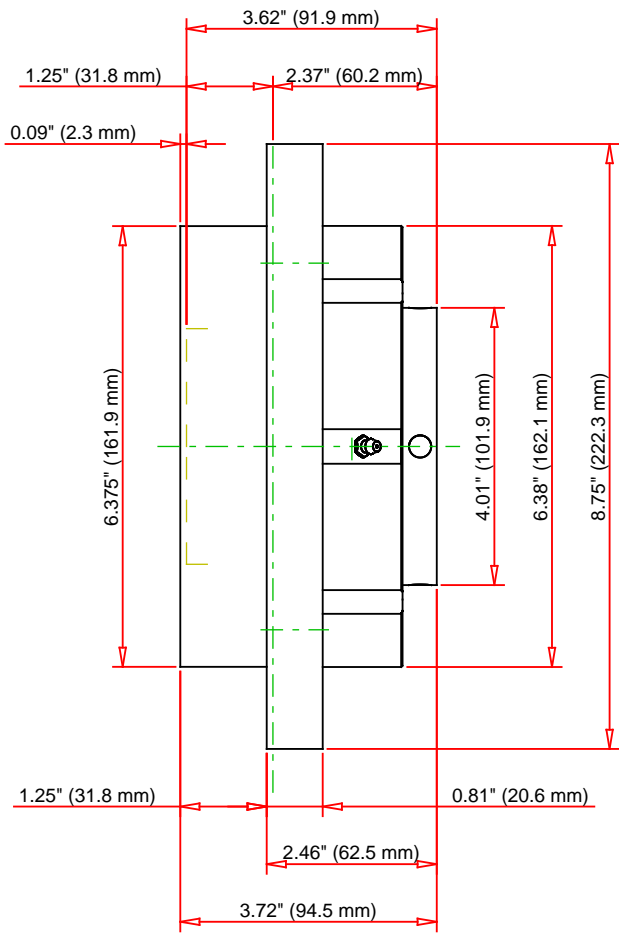

Note: Section View not to Scale

C - Dynamic Load	49900	lbf	222000	N
C0 - Static Load	54100	lbf	240000	N
Weight	22	lb	10	kg
Max. Speed T-Seals & Grease	2400	rpm		
Rad. Clearance - Max.	0.0031			

**TIMKEN**  
THE TIMKEN COMPANY  
NORTH CANTON, OHIO USA

**QMC15J211S**  
Eccentric Piloted Flange Cartridge

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

**FOR DISCUSSION ONLY**