



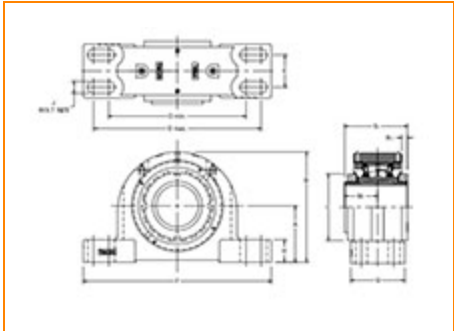

The Timken Company
4500 Mt Pleasant St. NW
N. Canton, OH 44720
Phone: (234) 262-3000
E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number TAAPH38K615S, Double Nut Tapered Adapter Four-Bolt Pillow Block

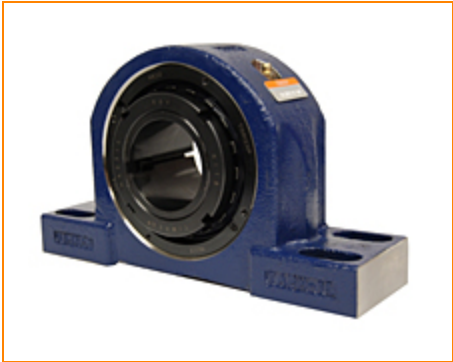

[Specifications](#) | [Dimensions](#) | [Radial and Thrust Factors](#) | [Engineering Bearing Attributes](#)

Specifications

Engineering Group	Mounted Bearing
Bearing Number	23138
Shaft Size	6 15/16 in
Shaft Size Type	Imperial
Full Timken Part Number	TAAPH38K615SB TAAPH38K615SC TAAPH38K615SEB TAAPH38K615SEC TAAPH38K615SEM TAAPH38K615SEN TAAPH38K615SEO TAAPH38K615SET TAAPH38K615SMT TAAPH38K615SNT TAAPH38K615SO TAAPH38K615ST
Locking Style	Double Nut Tapered Adapter



Housing Construction

Four-Bolt Pillow Block

Dimensions

Dimension A	7.88 in 200 mm
Dimension B	15.75 in 400.1 mm
Dimension C	9.45 in 240 mm
Dimension D Min	21.63 in 550.9 mm
Dimension D Max	24.38 in 619.3 mm
Dimension E	4-1/2 in 114.3 mm
Dimension F	28 in 711.2 mm
Dimension G	7.5 in 190.5 mm
Dimension H	3.38 in 85.9 mm
Dimension J (Bolt Size)	1.25 in 30 mm
Dimension L	8.14 in 206.7 mm
Dimension MT	4.13 in 104.9 mm
Dimension RTT	0.52 in 13.2 mm

Dimension ST

8.17 in
207.5 mm

Radial and Thrust Factors

C0 - Static Load

525000 lbf
2340000 N

C - Dynamic Load (Basic)

365000 lbf
1630000 N

e - Geometry Factor

0.3

Y1 - Geometry Factor

2.26



Y2 - Geometry Factor

3.36

Engineering Bearing Attributes

Float

0.083 in
2.108 mm

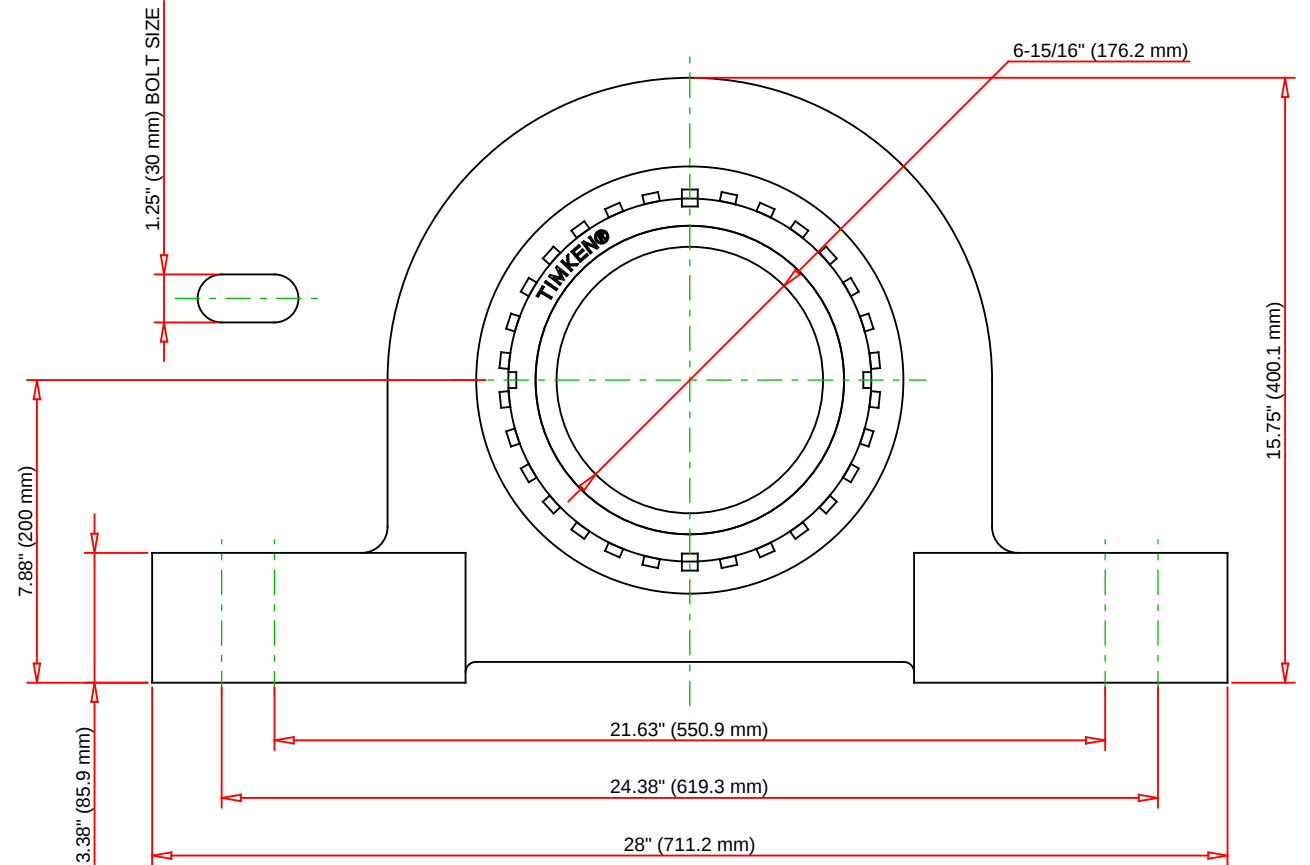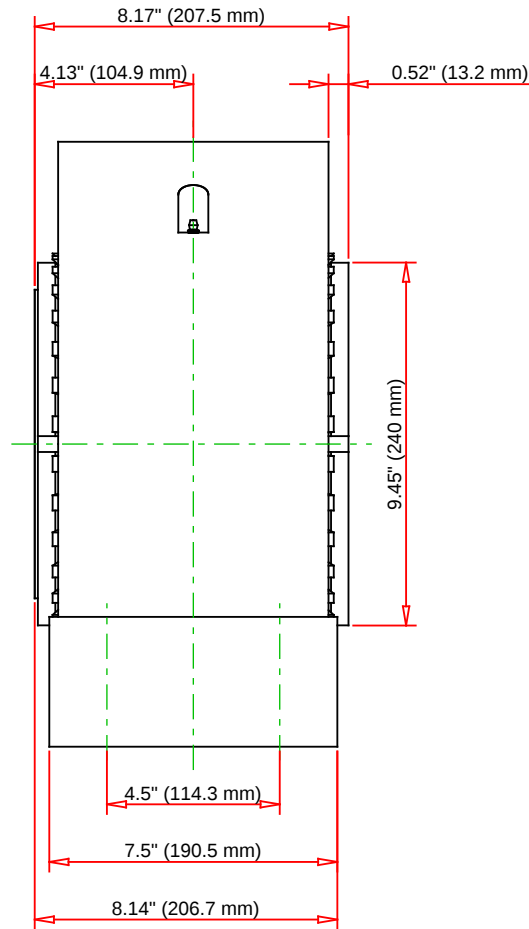

Note: Section View not to Scale

C - Dynamic Load	365000	lbf	1630000	N
C0 - Static Load	525000	lbf	2340000	N
Weight	410	lb	185.9	kg
Max. Speed T-Seals & Grease	rpm			
Rad. Clearance - Max.				

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

TAAPH38K615S
Double Nut Tapered Adapter Four-Bolt
Pillow Block

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY