


Chains & sprockets	Wear strips	Side guide brackets & accessories	Levelers
Modular belts & sprockets	Chain & belt return systems	Frame & structure supports	Bearings
Curves & tracks	Side guide solutions	Miscellaneous products	Related information

11170a

881 VG

www.SystemPlastSmartGuide.com

Sideflexing chains with rubber pads

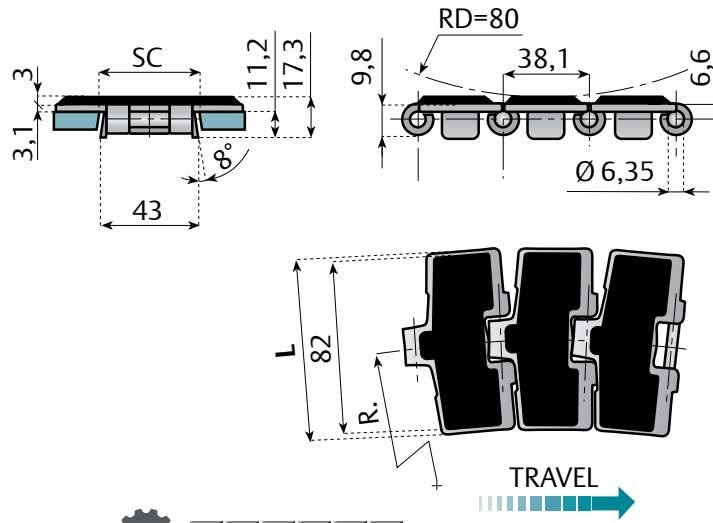

Click here for related information.

Characteristics:

Sideflexing chains with vulcanized NBR rubber.




11040b

Item description	Material		Max. working load	Width L		R min.	SC		Weight Kg/m
	Chain	Rubber		mm	inch		Straight	Curving	
SSE881-K325VG	EXTRA	NBR	4.850	82,5	3 ¼	500	44,5	41,5	3,1

881 TAB VG

Sideflexing chains with rubber pads

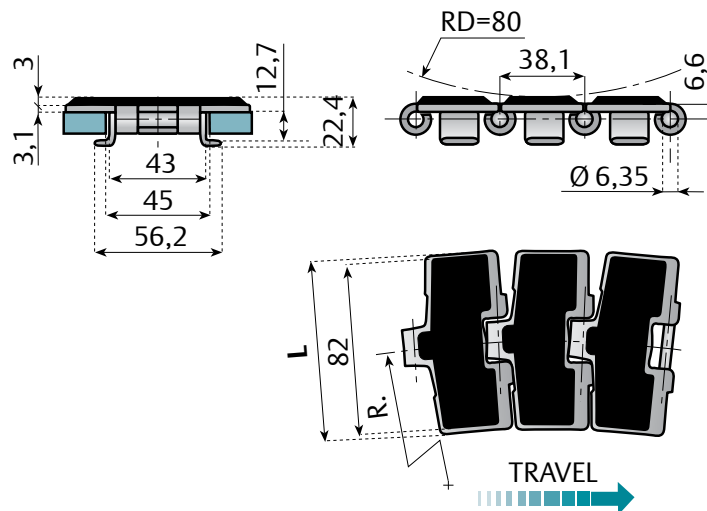

Click here for related information.

Characteristics:

Sideflexing chains with vulcanized NBR rubber.

Tabs reduce friction on the return section of the conveyor.



11040b

Item description	Material		Max. working load	Width L		R min.	Weight Kg/m
	Chain	Rubber		mm	inch		
SSE881TAB-K325VG	EXTRA	NBR	4.850	82,5	3 ¼	500	3,1

Standard length: 80 pitches (10 ft. - 3,048 m)

Breaking load according to standard ISO 4348 - DIN 8153