

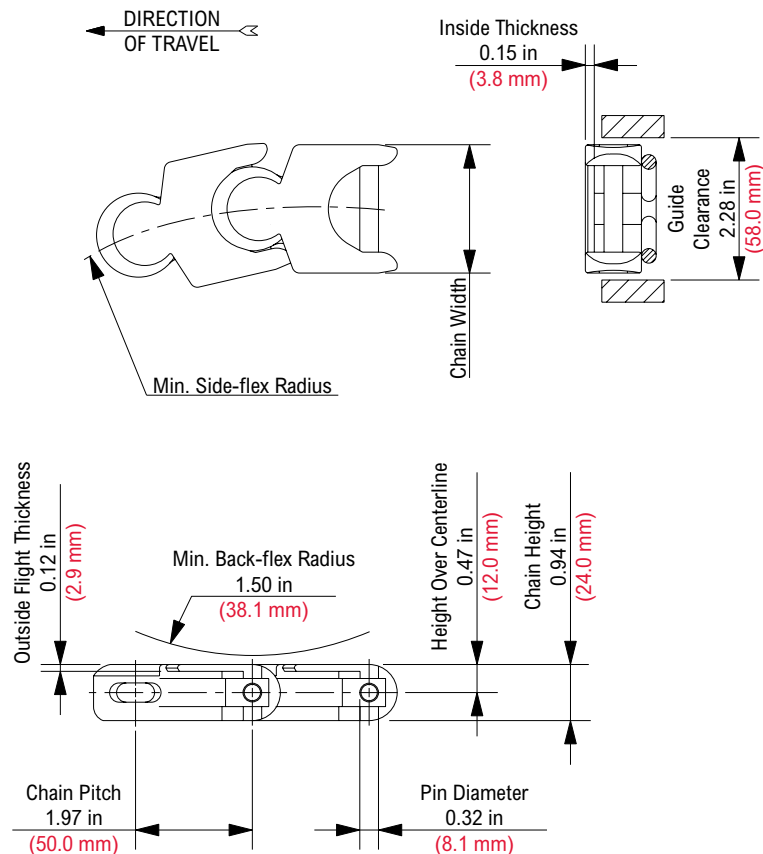
1700



Photo shows 1700 TableTop® Chain molded in Low Friction (LF) material.

Chain Information

Chain Width			Min. Side-flex Radius		Approximate Weight	
desc	in	mm	in	mm	lbs/ft	kg/m
N/A	2.17	55.1	5.75	146.1	0.85	1.27

Chain Drawing**Available Materials**

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
	dry	wet		dry	wet						
Standard Materials											
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	600	2,669	Yes
MLF	Medium Duty Low Friction	Zinc Plated Steel	-40	180	150	-40	82	66	600	2,669	No
Made-to-Order Materials											
AS	Anti-Static	Stainless Steel	0	180	NR	-18	82	NR	360	1,601	No
BWR	Black Wear Resistant	Stainless Steel	-40	180	NR	-40	82	NR	720	3,203	No
CR	Extreme Chemical Resistant	Stainless Steel	40	240	212	4	116	100	480	2,135	Yes
D	Plain Acetal	Stainless Steel	-40	180	150	-40	82	66	600	2,669	Yes
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	600	2,669	Yes
P	Chemical Resistant	Stainless Steel	0	180	140	-18	82	60	480	2,135	Yes
WHP	White High Performance	Stainless Steel	-40	180	150	-40	82	66	600	2,669	Yes
WLF	White Low Friction	Stainless Steel	-40	180	150	-40	82	66	600	2,669	Yes
WX	Green Abrasion Resistant Polyamide	Stainless Steel	-40	220	NR	-40	104	NR	600	2,669	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, Platinum Series, HP and PS are trademarks of Rexnord Industries, LLC.
All rights reserved.

Additional Notes

Stocked in 61 pitch, 10 ft (3.048 m) length strands.



Zinc plated carbon steel pins are available on a made-to-order basis.

Pin material can be identified by pivot color; black pivots indicate stainless steel pins and tan pivots indicate zinc plated carbon steel pins.

Armor-clad cap material is stainless steel.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

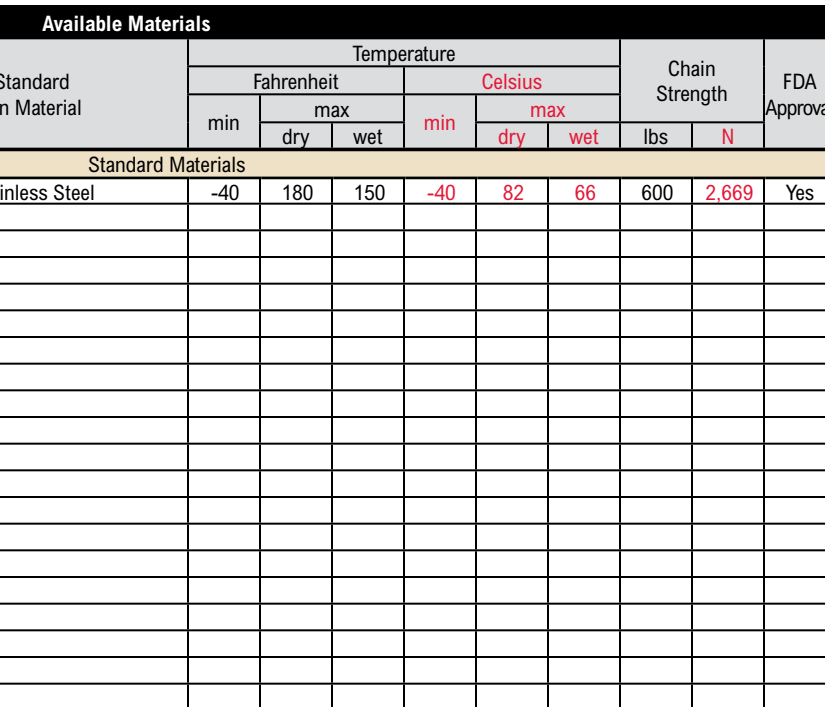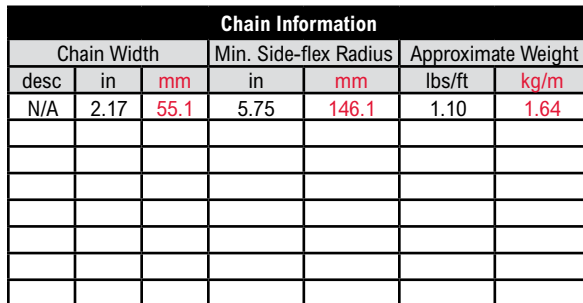

Additional Notes

Stocked in 61 pitch, 10 ft (3.048 m) length strands.

Zinc plated carbon steel pins are available on a made-to-order basis.


Pin material can be identified by pivot color; black pivots indicate stainless steel pins and tan pivots indicate zinc plated carbon steel pins.

Armor-clad cap material is stainless steel.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.


Corner Disc (Flat Top)

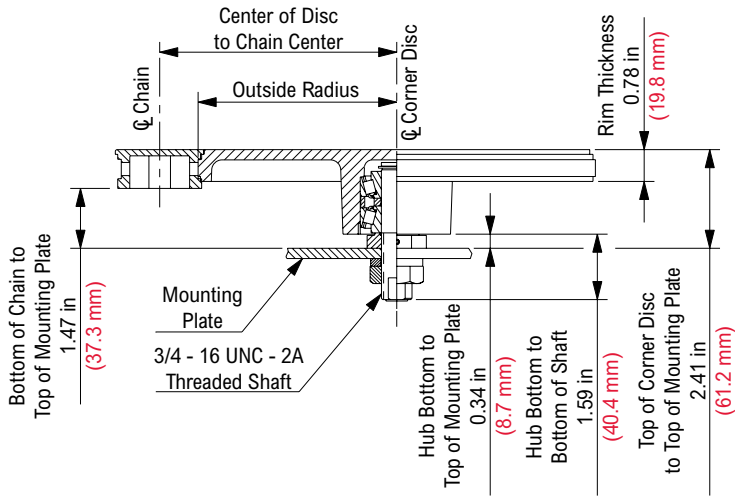

Corner Disc Number	Center of Disc to Chain Center		Outside Radius		Approximate Weight	
	in	mm	in	mm	lbs	kg
1700 FT-10	5.90	149.9	4.84	122.9	4.20	1.91
1700 FT-18	10.00	254.0	8.94	227.1	7.00	3.18

Corner Disc Material: Aluminum.

Corner Disc (Raised Hub)

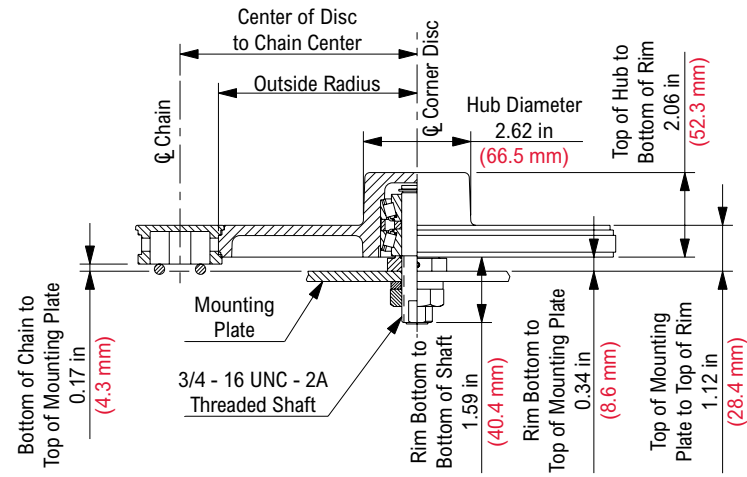

Corner Disc Number	Center of Disc to Chain Center		Outside Radius		Approximate Weight	
	in	mm	in	mm	lbs	kg
1700 RH-10	5.90	149.9	4.84	122.9	4.20	1.91

Corner Disc Material: Aluminum.

Extended Pivot

Please indicate if you require an extended pivot every pitch, every second pitch, etc. when ordering.

For 1700 chains only. Do not use with AC 1700 chain.

