

BALDOR • RELIANCE

Customer information packet

VXM050742A

0.75HP, 1725RPM, 3PH, 60HZ, 56C, XPFC, F1

Class - CLI GP D; CLII GP F,G

Division - Division I

Specifications

Enclosure	XPFC
Frame	56C
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP D; CLII GP F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	.750 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 208.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA UL
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	1.500 A @ 460.0 V 3.000 A @ 230.0 V 3.200 A @ 208.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	73.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater

Part detail

Revision	D
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	34WG5721
Layout	34LY5336
Eff. date	05-01-2024
CD Diagram	CD0007
Poles	04
Leads	12#18
Proprietary	False
Created date	08-04-2020

High Voltage Full Load Amps	1.5 a
Insulation Class	B
Inverter Code	Not Inverter
IP Rating	NONE
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3420M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	14.22 IN
Power Factor	58
Product Family	Hazardous Location Motor
Pulley Face Code	C-Face
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload
Winding Thermal 1 Location	EP
Winding Thermal 2	None

Nameplate

NP0016XPSL					
NO.		CC			
SER. #					
SPEC	34-0000-0388				
CAT.NO.	VXM050742A				
H.P.	.75	T. CODE	T3C		
VOLTS	208-230/460				
AMPS	3.2-3/1.5				
R.P.M.	1725 34WG5721				
HZ	60	PH	3	CLASS	B
SER.F.	1.00	DES	B	CODE	K
RATING	40C AMB-CONT				
FRAME	56C	NEMA NOM. EFF	73		
	PF	58			
BLANK	NEMA MG-1 PART 5, IP54				

AC Induction Motor Performance Data

Record # 6818

Typical performance - not guaranteed values

Winding: 34WG5721-R001		Type: 3420M		Enclosure: XPFC	
Nameplate Data			460 V, 60 Hz: High Voltage Connection		
Rated Output (HP)	.75	Full Load Torque	2.25 LB-FT		
Volts	208-230/460	Start Configuration	direct on line		
Full Load Amps	3.2-3/1.5	Breakdown Torque	10 LB-FT		
R.P.M.	1725	Pull-up Torque	8.5 LB-FT		
Hz	60 Phase	3	Locked-rotor Torque	8.8 LB-FT	
NEMA Design Code	B KVA Code	K	Starting Current	10 A	
Service Factor (S.F.)		1	No-load Current	1.2 A	
NEMA Nom. Eff.	73 Power Factor	58	Line-line Res. @ 25°C	17.7 Ω	
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load	74°C	

Load Characteristics 460 V, 60 Hz, 0.75 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	28	42	55	64	71	76
Efficiency	56.1	69.7	74.7	76.2	76.1	75.2
Speed	1783	1766	1749	1731	1711	1693
Line amperes	1.2	1.2	1.3	1.5	1.6	1.8


ABB Motors and Mechanical Inc.

WINDING # 34WG5721

0.75 HP 3 PH 60 HZ 1725 RPM 460 V 3420M

Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=10 PU=8.5 LR=8.8 LRA=10

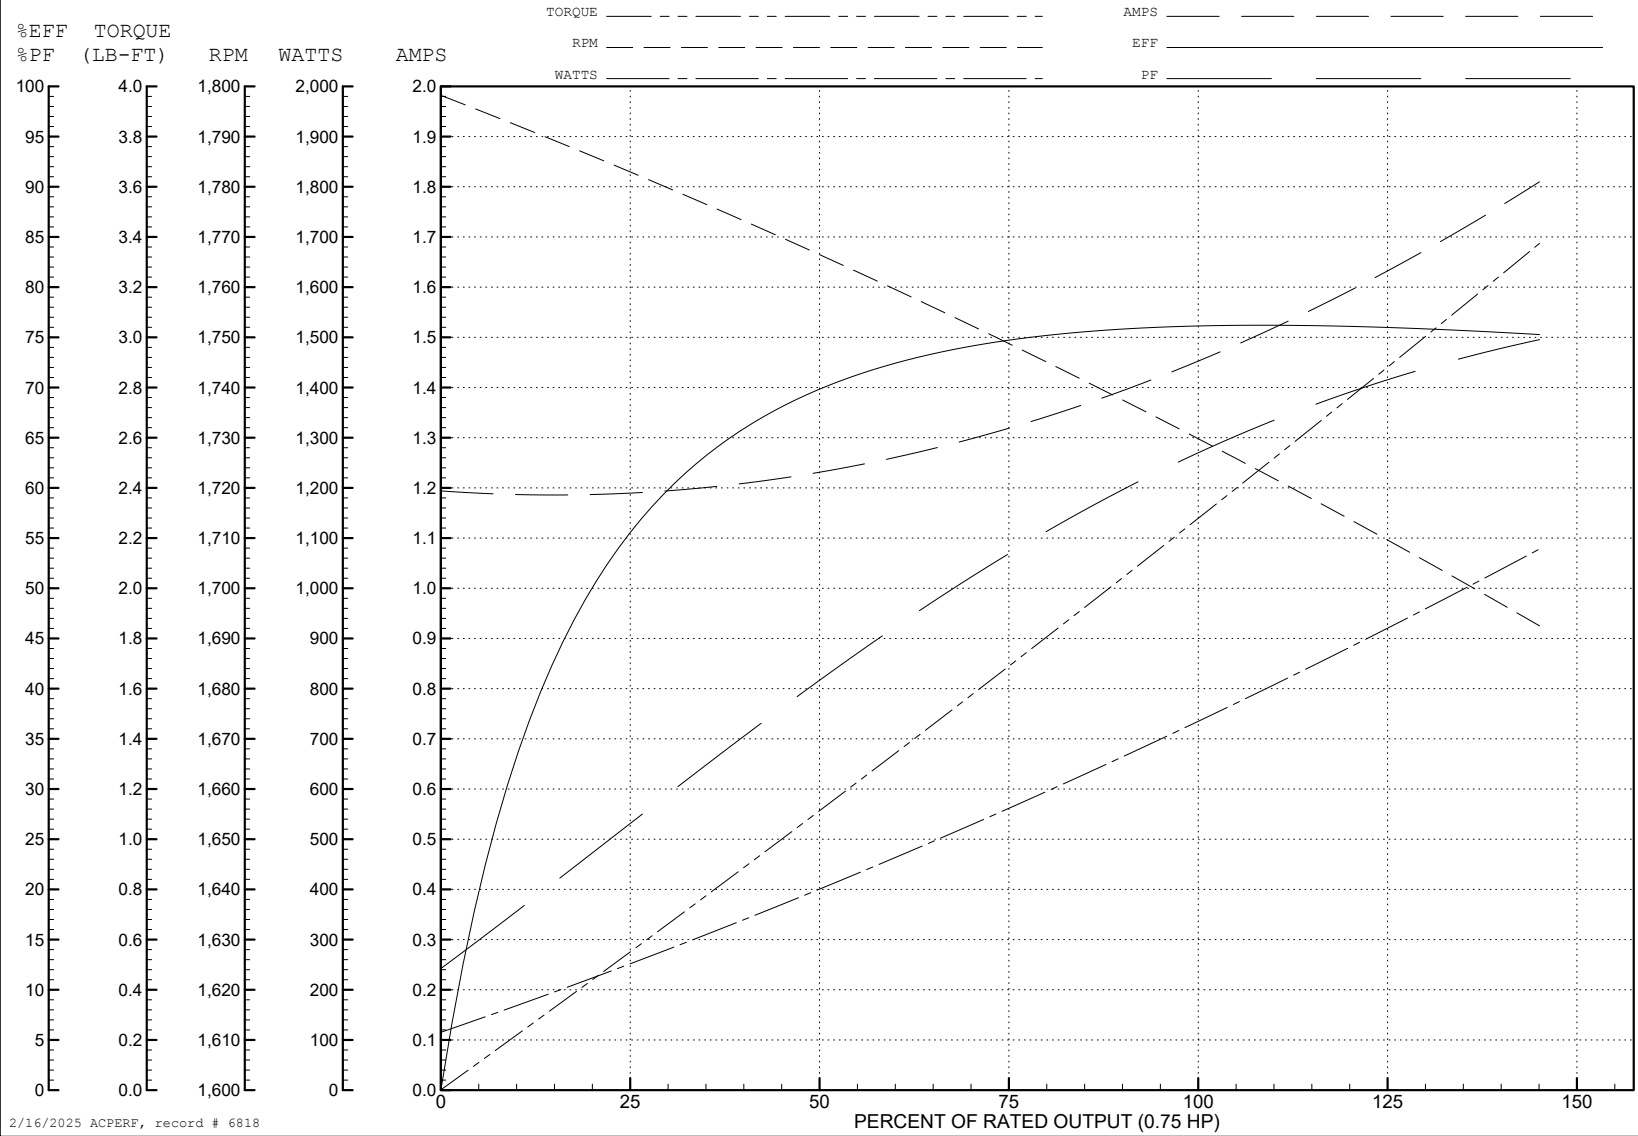

2/16/2025 ACPERF, record # 6818

AC Induction Motor Performance Data

Record # 52509

Typical performance - not guaranteed values

Winding: 34WG5721-R001		Type: 3420M	Enclosure: XPFC		
Nameplate Data			208 V, 60 Hz: Low Voltage Connection		
Rated Output (HP)	.75	Full Load Torque	2.26 LB-FT		
Volts	208-230/460	Start Configuration	direct on line		
Full Load Amps	3.2-3/1.5	Breakdown Torque	8.04 LB-FT		
R.P.M.	1725	Pull-up Torque	6.66 LB-FT		
Hz	60 Phase	3	Locked-rotor Torque	6.89 LB-FT	
NEMA Design Code	B	KVA Code	K	Starting Current	17.58 A
Service Factor (S.F.)	1	No-load Current	1.856 A		
NEMA Nom. Eff.	73	Power Factor	58	Line-line Res. @ 25°C	4.425 Ω
Rating - Duty	40C AMB-CONT		Temp. Rise @ Rated Load	63°C	
			Locked-rotor Power Factor	57.4	
			Rotor inertia	0.0476 LB-FT ²	

Load Characteristics 208 V, 60 Hz, 0.75 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	33	53	67	73	82	85
Efficiency	64	75.4	78.7	78.5	77.6	75.9
Speed	1780	1761	1740	1719	1695	1672
Line amperes	1.888	1.958	2.22	2.68	3	3.5


ABB Motors and Mechanical Inc.

WINDING # 34WG5721

0.75 HP 3 PH 60 HZ 1725 RPM 208 V 3420M


Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=8.04 PU=6.66 LR=6.89 LRA=17.58

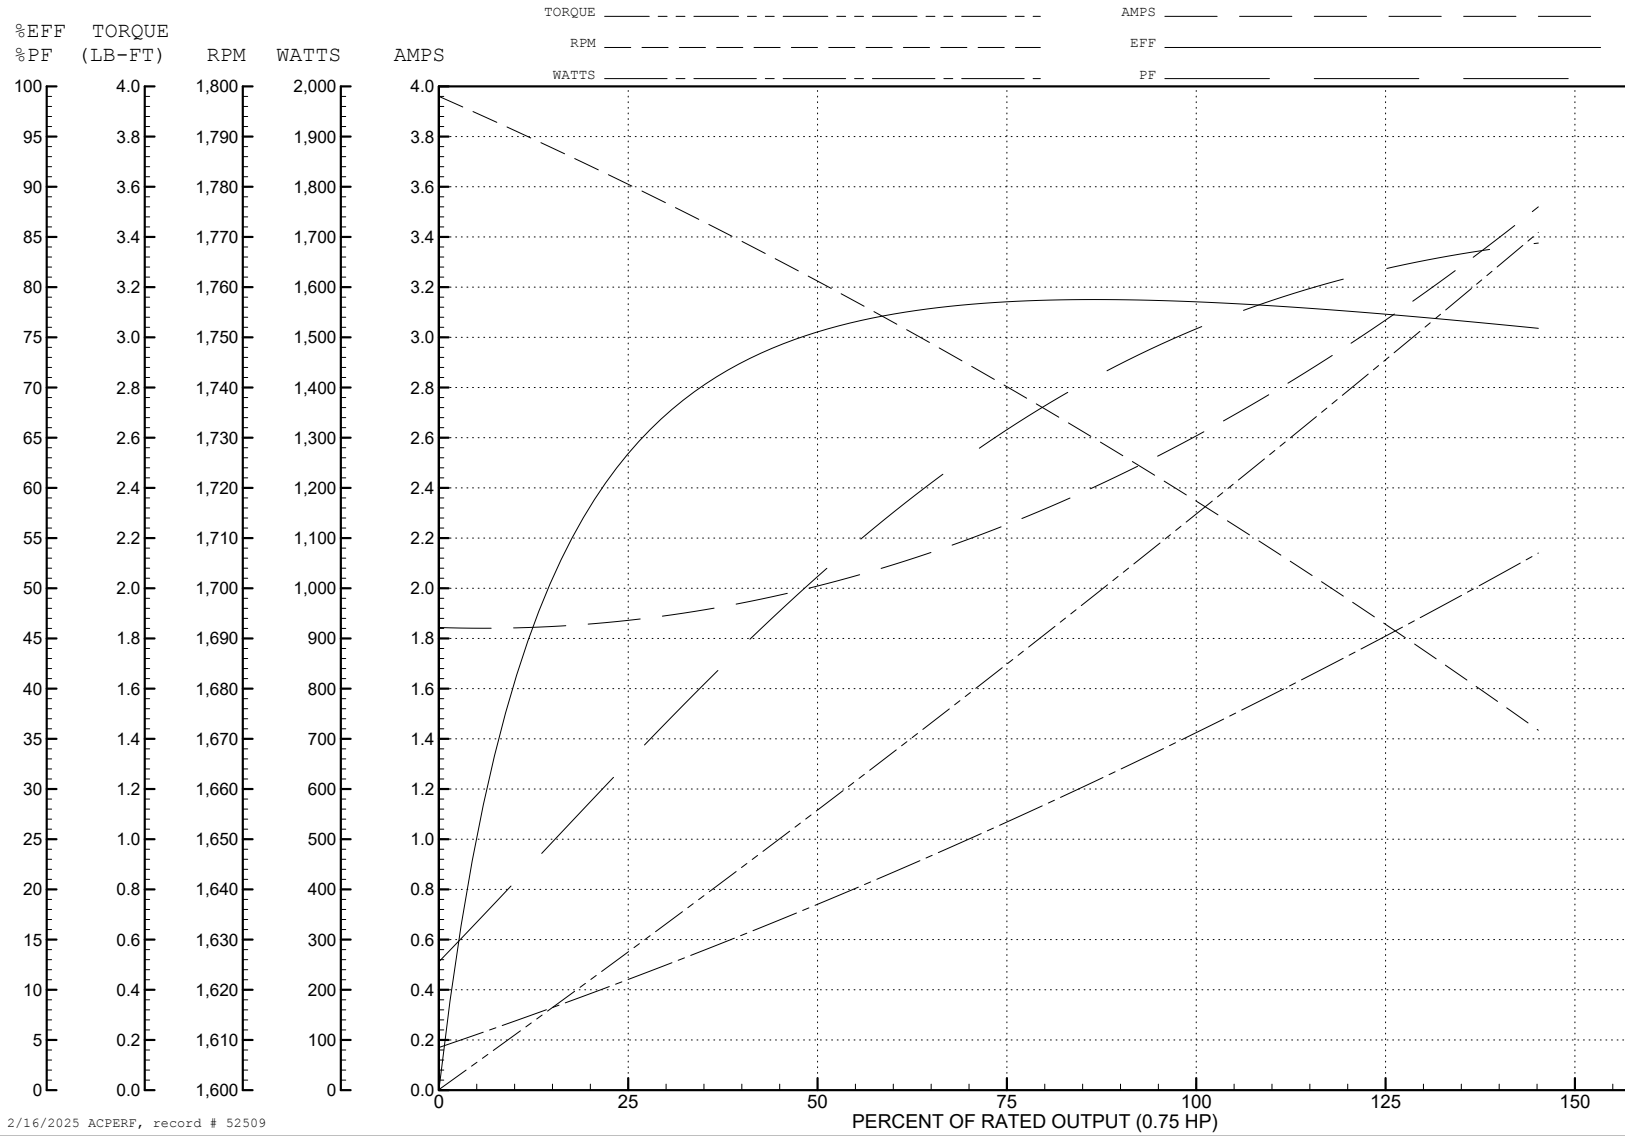

2/16/2025 ACPERF, record # 52509

34LY5336

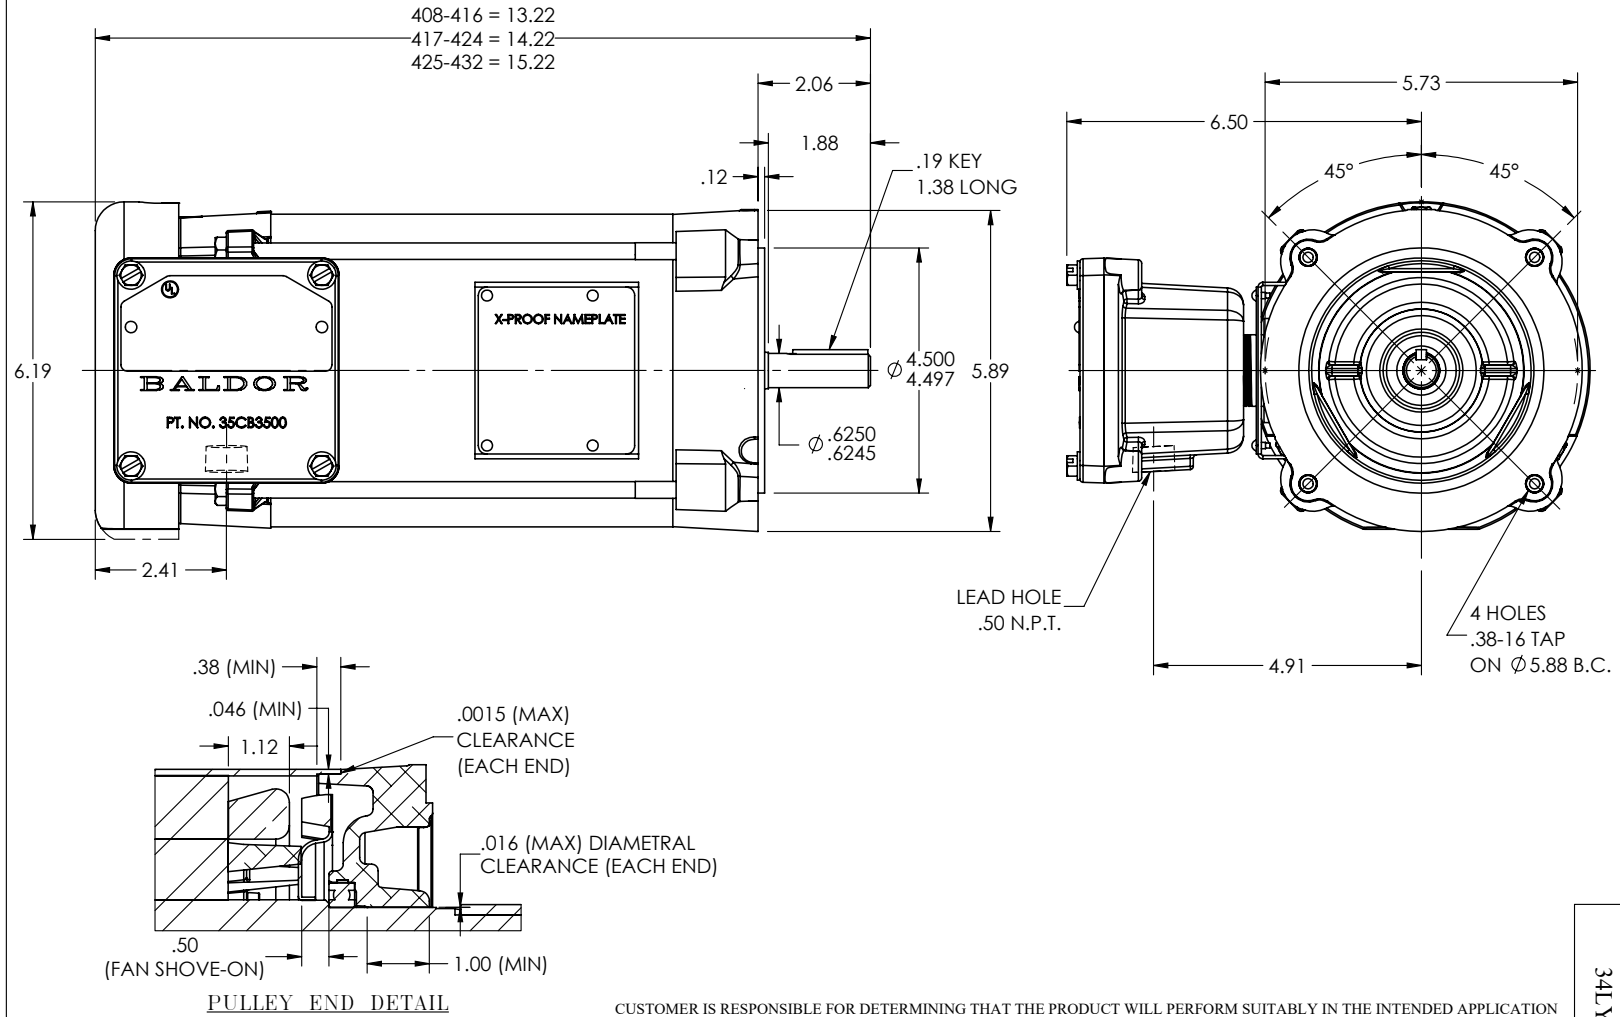


REV. DESC: LOAD TO SOLIDWORKS - REV K			
REV: L	VERSION: 08	REVISED: 08:27:57 04/05/2023	TDR: 000001201165
9ƎƎƎY7ƎƎ		MODEL NO. 34LY5336	REF: -
		BY: ENFRAJ0	

BALDOR - RELIANCE®

STD VERT X34M NEMA 56C TEFC W/ATO CL1 GP D, CL2 GP F & G

34LY5336

A-C MOTOR
CONNECTION DIAGRAM

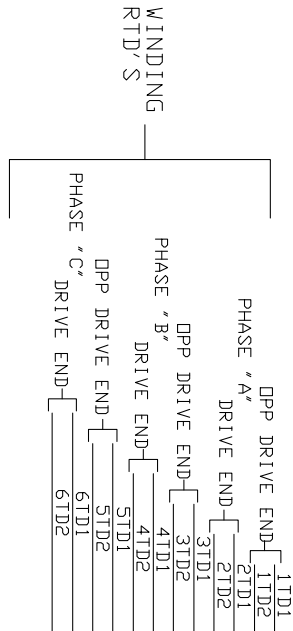

418174-033

418174-033

CUSTOMER _____ CUSTOMER _____ S. O. NO. _____
 ORDER NO. _____
 APPROVED _____ SHEET NO. OF _____ D. O. DATE _____



REV. DESC: REMOVED "ACCESSORIES IN MAIN CONDUIT BOX"		
REV. LTR: B	VERSION: 02	TDR: 00000797580
FILE: \RAG\00013\851	REVISED: 09:59:51 05/01/2013	BY: RAGJSS1
MTL: -		

BALDOR

A-C MOTOR CONNECTION DIAGRAM ACCESSORIES IN MAIN CONDUIT BOX

SH 1 of 1

CD0007

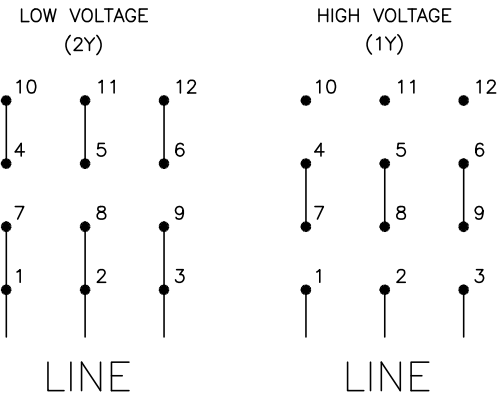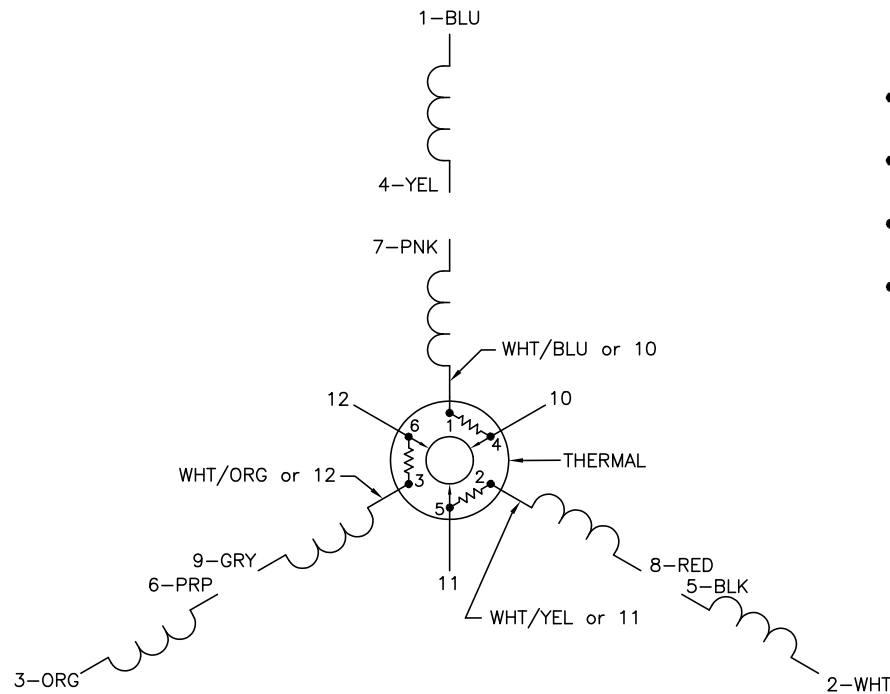

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0007

REV. DESC: ADDED "CK" PLANT CODE			
REV. LTR: E	BY: EAH	REVISED: 05/06/99 17:1	TDR: 0181040
L00000		FILE: AAA00008370	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, THERMAL, 12 LEADS