

Light Duty 2-Bolt Flange

UFL 000 PTI Series


Extra Narrow Width Eccentric Collar Lock

Rustproof zinc alloy housings.

Bearings are high carbon chromium bearing steel.



Models Available

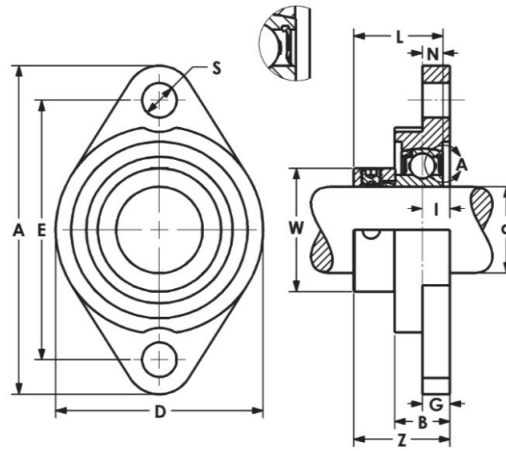

Part No.	Shaft Size d		Dimensions - (mm)											Bolt Size mm	Bearing No.	Housing No.	Wt. kg
	mm	in	A	E	I	G	B	S	D	Z	L	N	W				
UFL000-10MM	10	—	60	45	5.5	5.5	11.5	7	36	19	17.5	4	17	M 6	U000-10MM	FL000	0.1
UFL001-12MM	12	—	63	48	5.5	5.5	11.5	7	38	19	17.5	4	19	M 6	U001-12MM	FL001	0.1
UFL002-15MM	15	—	67	53	6.5	6.5	13	7	42	20.5	18.5	4.5	22	M 6	U002-15MM	FL002	0.1
UFL003-17MM	17	—	71	56	7	7	14	7	46	22.5	20.5	5	25	M 6	U003-17MM	FL003	0.2
UFL004-20MM	20	—	90	71	8	8	16	10	55	26.5	24.5	6	30	M 8	U004-20MM	FL004	0.2
UFL004-12		3/4													U004-12		
UFL005-25MM	25	—	95	75	8	8	16	10	60	27.5	25.5	6	36	M 8	U005-25MM	FL005	0.2
UFL005-16		1													U005-16		
UFL006-30MM	30	—	112	85	9	9	18	13	70	29	26.5	6.5	42	M 10	U006-30MM	FL006	0.3

KFL 000 PTI Series

Extra Narrow Width Set Screw Lock

Rustproof zinc alloy housings.

Bearings are high carbon chromium bearing steel.




Standard



Corrosion Resistant

Corrosion Resistant
Plated Housing &
Stainless Steel Insert
also available. Add
"CR" suffix to part no.
when ordering.
CR Units have FDA
FM222 Mobil

Stainless Steel
Options Available

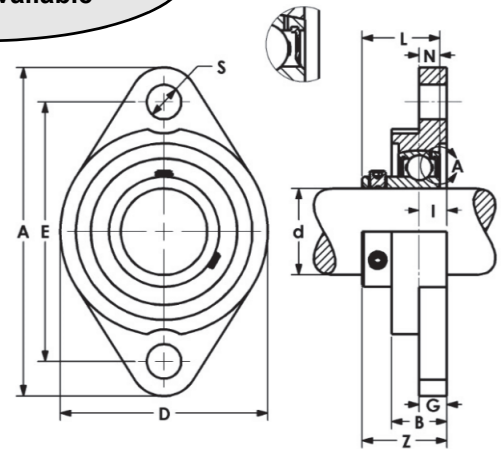

Standard Part No.	Corrosion Resistant Part No.	Shaft d		Dimensions (mm)										Bolt Size mm	Standard Bearing No.	Stainless Bearing No.	Hsg No.	Wt. kg
		mm	in	A	E	I	G	B	S	D	Z	L	N					
KFL000-10MM	KFL000-10MM-CR	10	—	60	45	5.5	5.5	11.5	7	36	15.5	14	4	M 6	K000-10MM	K000-10MM-CR	FL000	0.1
KFL001-12MM	KFL001-12MM-CR	12	—	63	48	5.5	5.5	11.5	7	38	16	14.5	4	M 6	K001-12MM	K001-12MM-CR	FL001	0.1
KFL002-15MM	KFL002-15MM-CR	15	—	67	53	6.5	6.5	13	7	42	18.6	16.5	4.5	M 6	K002-15MM	K002-15MM-CR	FL002	0.1
KFL003-17MM	KFL003-17MM-CR	17	—	71	56	7	7	14	7	46	19.5	17.5	5	M 6	K003-17MM	K003-17MM-CR	FL003	0.2
KFL004-20MM	KFL004-20MM-CR	20	—	90	71	8	8	16	10	55	23	21	6	M 8	K004-20MM	K004-20MM-CR	FL004	0.2
KFL004-12	KFL004-12-CR		3/4												K004-12	K004-12-CR		
KFL005-25MM	KFL005-25MM-CR	25	—	95	75	8	8	16	10	60	24.5	22.5	6	M 8	K005-25MM	K005-25MM-CR	FL005	0.2
KFL005-16	KFL005-16-CR		1												K005-16	K005-16-CR		
KFL006-30MM	KFL006-30MM-CR	30	—	112	85	9	9	18	13	70	27	24.5	6.5	M 10	K006-30MM	K006-30MM-CR	FL006	0.3