





HOUSING	OPERATING DISTANCE	MOUNTING	✓ Long operating distance ✓ Exceptional price-performance ratio ✓ Excellent accuracy ✓ IP 67 ✓ IO-Link v1.1	
M12	8 mm	Quasi-embeddable		

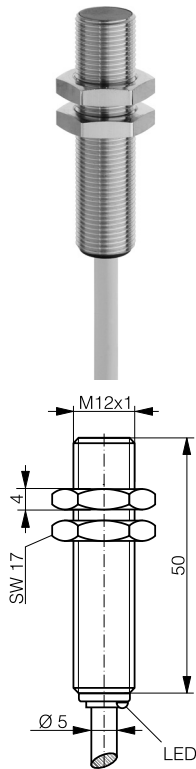


DW-AD-52x-M12

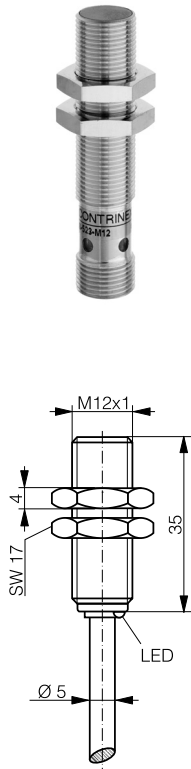

DW-AD-52x-M12-120

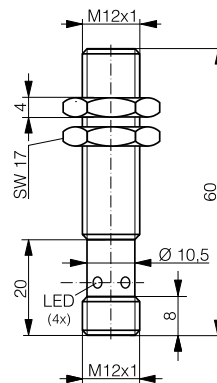

DW-AS-52x-M12



DW-AS-52x-M12-120

DETECTION DATA		INTERFACE	
Rated operating distance (S_n)	8 mm	Indicator LED, yellow	Sensing state ($0 \leq s \leq 0.8 S_r$)
Assured operating distance (S_a)	$\leq (0.81 \times S_n)$ mm	Indicator LED, yellow, blinking	Sensing state ($0.8 S_r < s \leq S_r$)
Repeat accuracy	≤ 0.4 mm	IO-Link	✓
Hysteresis	$3\% S_r \leq \text{Hyst} \leq 15\% S_r$	MTTF (@40°C)	1073 y
Temperature drift	$\leq 10\% S_r$		
Standard target	24 x 24 x 1 mm ³ , FE360		

Note: $0.9S_n \leq S_a \leq 1.1S_n$.

ELECTRICAL DATA		MECHANICAL DATA	
Supply voltage range (U_B)	10...30 VDC	Mounting	Quasi-embeddable
Residual ripple	$\leq 20\% U_B$	Housing material	Chrome-plated brass
Output current	≤ 200 mA	Sensing face material	PBTP
Output voltage drop	≤ 2.0 VDC	Max tightening torque	10 Nm (6 Nm first 10 mm)
Power consumption (no-load)	≤ 10 mA	Ambient operating temperature	-25...+70°C ¹
Residual current	≤ 0.1 mA	Enclosure rating	IP 67
Switching frequency	≤ 400 Hz	Weight (cable / connector)	see page 2
Short-circuit protection	✓	Shock and vibration	IEC 60947-5-2
Voltage reversal protection	✓		
Cable length max.	≤ 300 m		

¹Maximum temperature according to UL: 70°C.


Note: all data measured according to IEC 60947-5-2 standard with $U_B = 20 \dots 30$ VDC, $T_A = 23^\circ\text{C} \pm 5^\circ\text{C}$.

CORRECTION FACTORS

Steel FE 360	1	Copper	0.23	Aluminum	0.27	Brass	0.36	Stainless S. V2A 1 / 2 mm	0.67
--------------	---	--------	------	----------	------	-------	------	---------------------------	------

Note: the operating distance of the sensor must be multiplied by the correction factor of the material. For example, the operating distance on Aluminum is $S_{n, Al} = S_n \times CF_{Al}$. In case of embeddable mounting, the distance is multiplied by the additional correction factor of the support, thus $S_{n, Al} = S_n \times CF_{Al} \times CF_{emb, Al}$.

INSTALLATION CONDITIONS

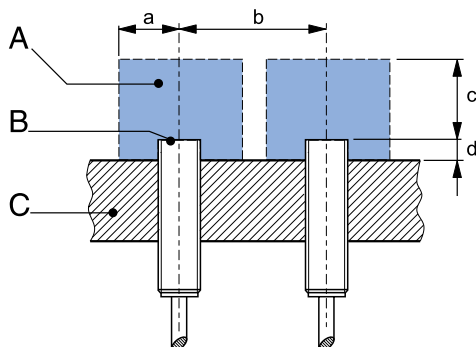

A : metal free zone
B : sensing face
C : support

a : 14 mm
b : 30 mm
c : 24 mm
d : steel 2 mm

IO-LINK FUNCTIONALITIES

IO-Link version	1.1
SIO mode	Supported
Process data	7-bit input
Baudrate	COM2 (38.4 kBaud)
Minimum cycle time	10.4 ms
ISDU	Not supported



IO-Link files may be downloaded from




www.contrinx.com/product-range/inductive-sensors/.

Select the product name to display the product page with corresponding downloads.

Alternatively, just click/scan the QR code on the left.

Note: additional installation information can be found in the glossary of the Contrinx General Catalog.

WIRING DIAGRAM



PIN ASSIGNMENT

AVAILABLE TYPES

Part number	Part reference	Polarity	Connection	Output on pin 2	Output on pin 4 / bk	Weight
330-020-125	DW-AD-521-M12	NPN	PVC, 2 m, 3 wire	-	Normally open (NO)	92 g
330-020-126	DW-AD-522-M12	NPN	PVC, 2 m, 3 wire	-	Normally close (NC)	92 g
330-020-127	DW-AD-523-M12	PNP	PVC, 2 m, 3 wire	-	Normally open (NO) / IO-Link	92 g
330-020-128	DW-AD-524-M12	PNP	PVC, 2 m, 3 wire	-	Normally close (NC)	92 g
330-020-129	DW-AD-521-M12-120	NPN	PVC, 2 m, 3 wire	-	Normally open (NO)	87 g
330-020-130	DW-AD-522-M12-120	NPN	PVC, 2 m, 3 wire	-	Normally close (NC)	87 g
330-020-131	DW-AD-523-M12-120	PNP	PVC, 2 m, 3 wire	-	Normally open (NO) / IO-Link	87 g
330-020-132	DW-AD-524-M12-120	PNP	PVC, 2 m, 3 wire	-	Normally close (NC)	87 g
330-020-154	DW-AS-521-M12	NPN	M12 4-pin	-	Normally open (NO)	27 g
330-020-155	DW-AS-521-M12-120	NPN	M12 4-pin	-	Normally open (NO)	23 g
330-020-156	DW-AS-522-M12	NPN	M12 4-pin	Normally close (NC)	-	27 g
330-020-157	DW-AS-522-M12-120	NPN	M12 4-pin	Normally close (NC)	-	23 g
330-020-158	DW-AS-523-M12	PNP	M12 4-pin	-	Normally open (NO) / IO-Link	27 g
330-020-159	DW-AS-523-M12-120	PNP	M12 4-pin	-	Normally open (NO) / IO-Link	23 g
330-020-160	DW-AS-524-M12	PNP	M12 4-pin	Normally close (NC)	-	27 g
330-020-161	DW-AS-524-M12-120	PNP	M12 4-pin	Normally close (NC)	-	23 g

Note: part reference may include additional suffix to indicate a revision version or special version. Further information is available on request.

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines. Terms of delivery and rights to change design reserved.