



Project:	Type:
Prepared By:	Date:

**Technical Specifications**

**Performance**

**Product Type:**

Outdoor Exit Sign

**Description:**

Outdoor exit sign with a single face and green letters. Wet rated.

**Input Wattage:**

2.7W

**Electrical**

**Power Factor:**

≥0.9

**Input Voltage:**

Dual 120/277 Voltage

**Operating Frequency (Hz):**

60Hz

**Input Current @ 120V (mA):**

25mA

**Input Current @ 277V (mA):**

11mA

**Dual Voltage Circuit Operation:**

No

**Operating Temperature:**

-4°F to 122°F (-20°C to 50°C)

**Battery Backup:**

No, AC only

**Battery Operating Temperature:**

-4°C to 122°C (-20°F to 50°F)

**Storage Temperature:**

68°F to 86°F (20°C to 30°C)

**Self Diagnostics:**

No, manual test only

**Remote Test Switch:**

No

**Installation**

**Mounting Method:**

Back/Top/End

**Mounting Type:**

Wall/Ceiling Mount

**Cold Weather Rated:**

No

**Construction**

**Shape:**

Rectangle

**Housing Material:**

Thermoplastic

**Panel Material:**

Thermoplastic

**Panel Color:**

White

**Letter Color:**

Green

**Housing Color:**

White

**Number of Faces:**

Single Face

**Arrow Direction:**

No Arrow

**Sign Format:**

Stencil

**Remote Capacity:**

No

**Compliance**

**Listings:**

UL924 Listed, NFPA 101 (current Life Safety Code), NEC and OSHA illumination standards

## Technical Specifications (continued)

**Environment:**

Suitable for indoor or outdoor use in dry, damp, and wet environments

**IP Rating:**

Outdoor

**Certification Model Number:**

WLEZXTEU1GW

**T20 Compliant:**

Can be used to conform with the requirements of California Title 20

**California Title 24 JA8 Compliant:**

Not applicable

**California Energy Commission (CEC) Status:**

Lawful for Sales in California

**FCC:**


Complies with Part 15 of the FCC Rules

**Other**

**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

## Dimensions

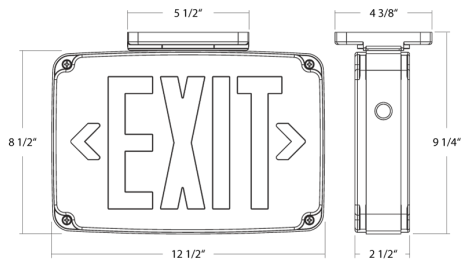

## Features

- Single-face panel with color letters
- Durable thermoplastic design
- Rated for use indoor and outdoor in dry, damp, and wet environments.
- Compliant with California Title 20

## Ordering Matrix

Family	Face	Exit Sign Letter Color	Panel	Housing	Cold Weather
EXITOUT		G			
	Blank = 1 Face	Blank = Red G = Green	Blank = White Panel	Blank = White Housing	Blank = Wet Location Rated C = Cold Weather