Reel Accessories | Roller Guides / Mounting Brackets

Roller Hose Guide Assemblies




HR1057 / HR1059






S270109 / 600168

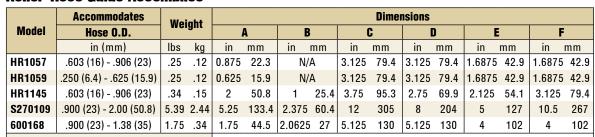

These four-way roller guide assemblies are for use with reels on cabinet door openings and for similar locations where sharp edges may cut or damage the hose. The four-way design permits pulling or retracting hose at any angle. Model S270109 has nylon rollers mounted on an 11 gauge steel frame with pre-drilled mounting holes.



Note: A hose bumper should be used with the four-way roller hose guide assemblies to prevent damage to rollers and nozzles. See chart on page 49.

Additional Accessories

	340° Pivot Base	For Reel Series	Part #
600608	Aligns reel to the direction of hose or cord run. May be mounted with reel upright or hanging. Weight 10 lbs (5 kg). Note: Use if hoses or cords are pulled at more than 45°.	RT / 4000 / 5000 / 5005 / 7000	600608
		80000 / D80000 / 30006	600801
		30012	600801-12
600992	Wall-Mounted Universal Swing Bracket Bracket will pivot approximately 180°. All steel construction with a durable baked on powder coat finish. Weight 6 lbs (3 kg).	For Reel Series	Part #
		RT	600992
		4000 / 5000	600993
		RT / 4000 / 5000 / 5005 / 7000	600626
600626	Note: Use if hoses or cords are pulled at more than 45°. Note: Not for overhead mounting.	80000 / D80000 / DP5000 / DP7000	600980





Top Mounting Channels and Beam Clamps

600370 Top channel and beam clamps - for one reel 600295 Top channel and beam clamps - for two reels For mounting Series 7000 reels to an I-beam or overhead support. Mounting channels can be mounted end to end to mount three or more reels. To permit the mounting of Reelcraft Series RT, 4000, 5000, 5005 and electric cord reels on mounting channel, an adaptor assembly must be used (#600230).

600230 Adaptor Assembly

Used with top channels and beam clamps only.

Roller Guide Assemblies





Spools and blocks are chrome-plated to resist corrosion and abrasion. Rollers speed handling and reduce wear on hose. All painted parts are finished with durable abrasion resistant baked-on powder coat. Delrin bearing surfaces give a quiet operation with minimum wear and all features combine to give trouble-free maximum service life.

For the special UHMW composite rollers, add a "U" at the end of the part number. (Example: S600693-1U)



(Example: 3000033 10)					
	e Reel ol Size	Bottom Wind Roller bracket assembly	Top Wind Roller bracket assembly	Multi Position Roller bracket assembly	
in	mm	model number			
Series 30000 - Four Way Rollers					
6	152	S600693-1	S600692-1	S600533-1	
12	305	S600693-2	S600692-2	S600533-2	
18	457	S600693-3	S600692-3	S600533-3	
22	559	S600693-4	S600692-4	S600533-4	
28	711	S600693-5	S600692-5	S600533-5	
Series 30000 - Three Way Rollers					
6	152	S602132-1	S602133-1		
12	305	S602132-2	S602133-2		
18	457	S602132-3	S602133-3		
22	559	S602132-4	S602133-4		
28	711	S602132-5	S602133-5		

Bottom wind and top wind may be used with all models except bevel crank. Multi position may not be used on models with a chain guard or Series