
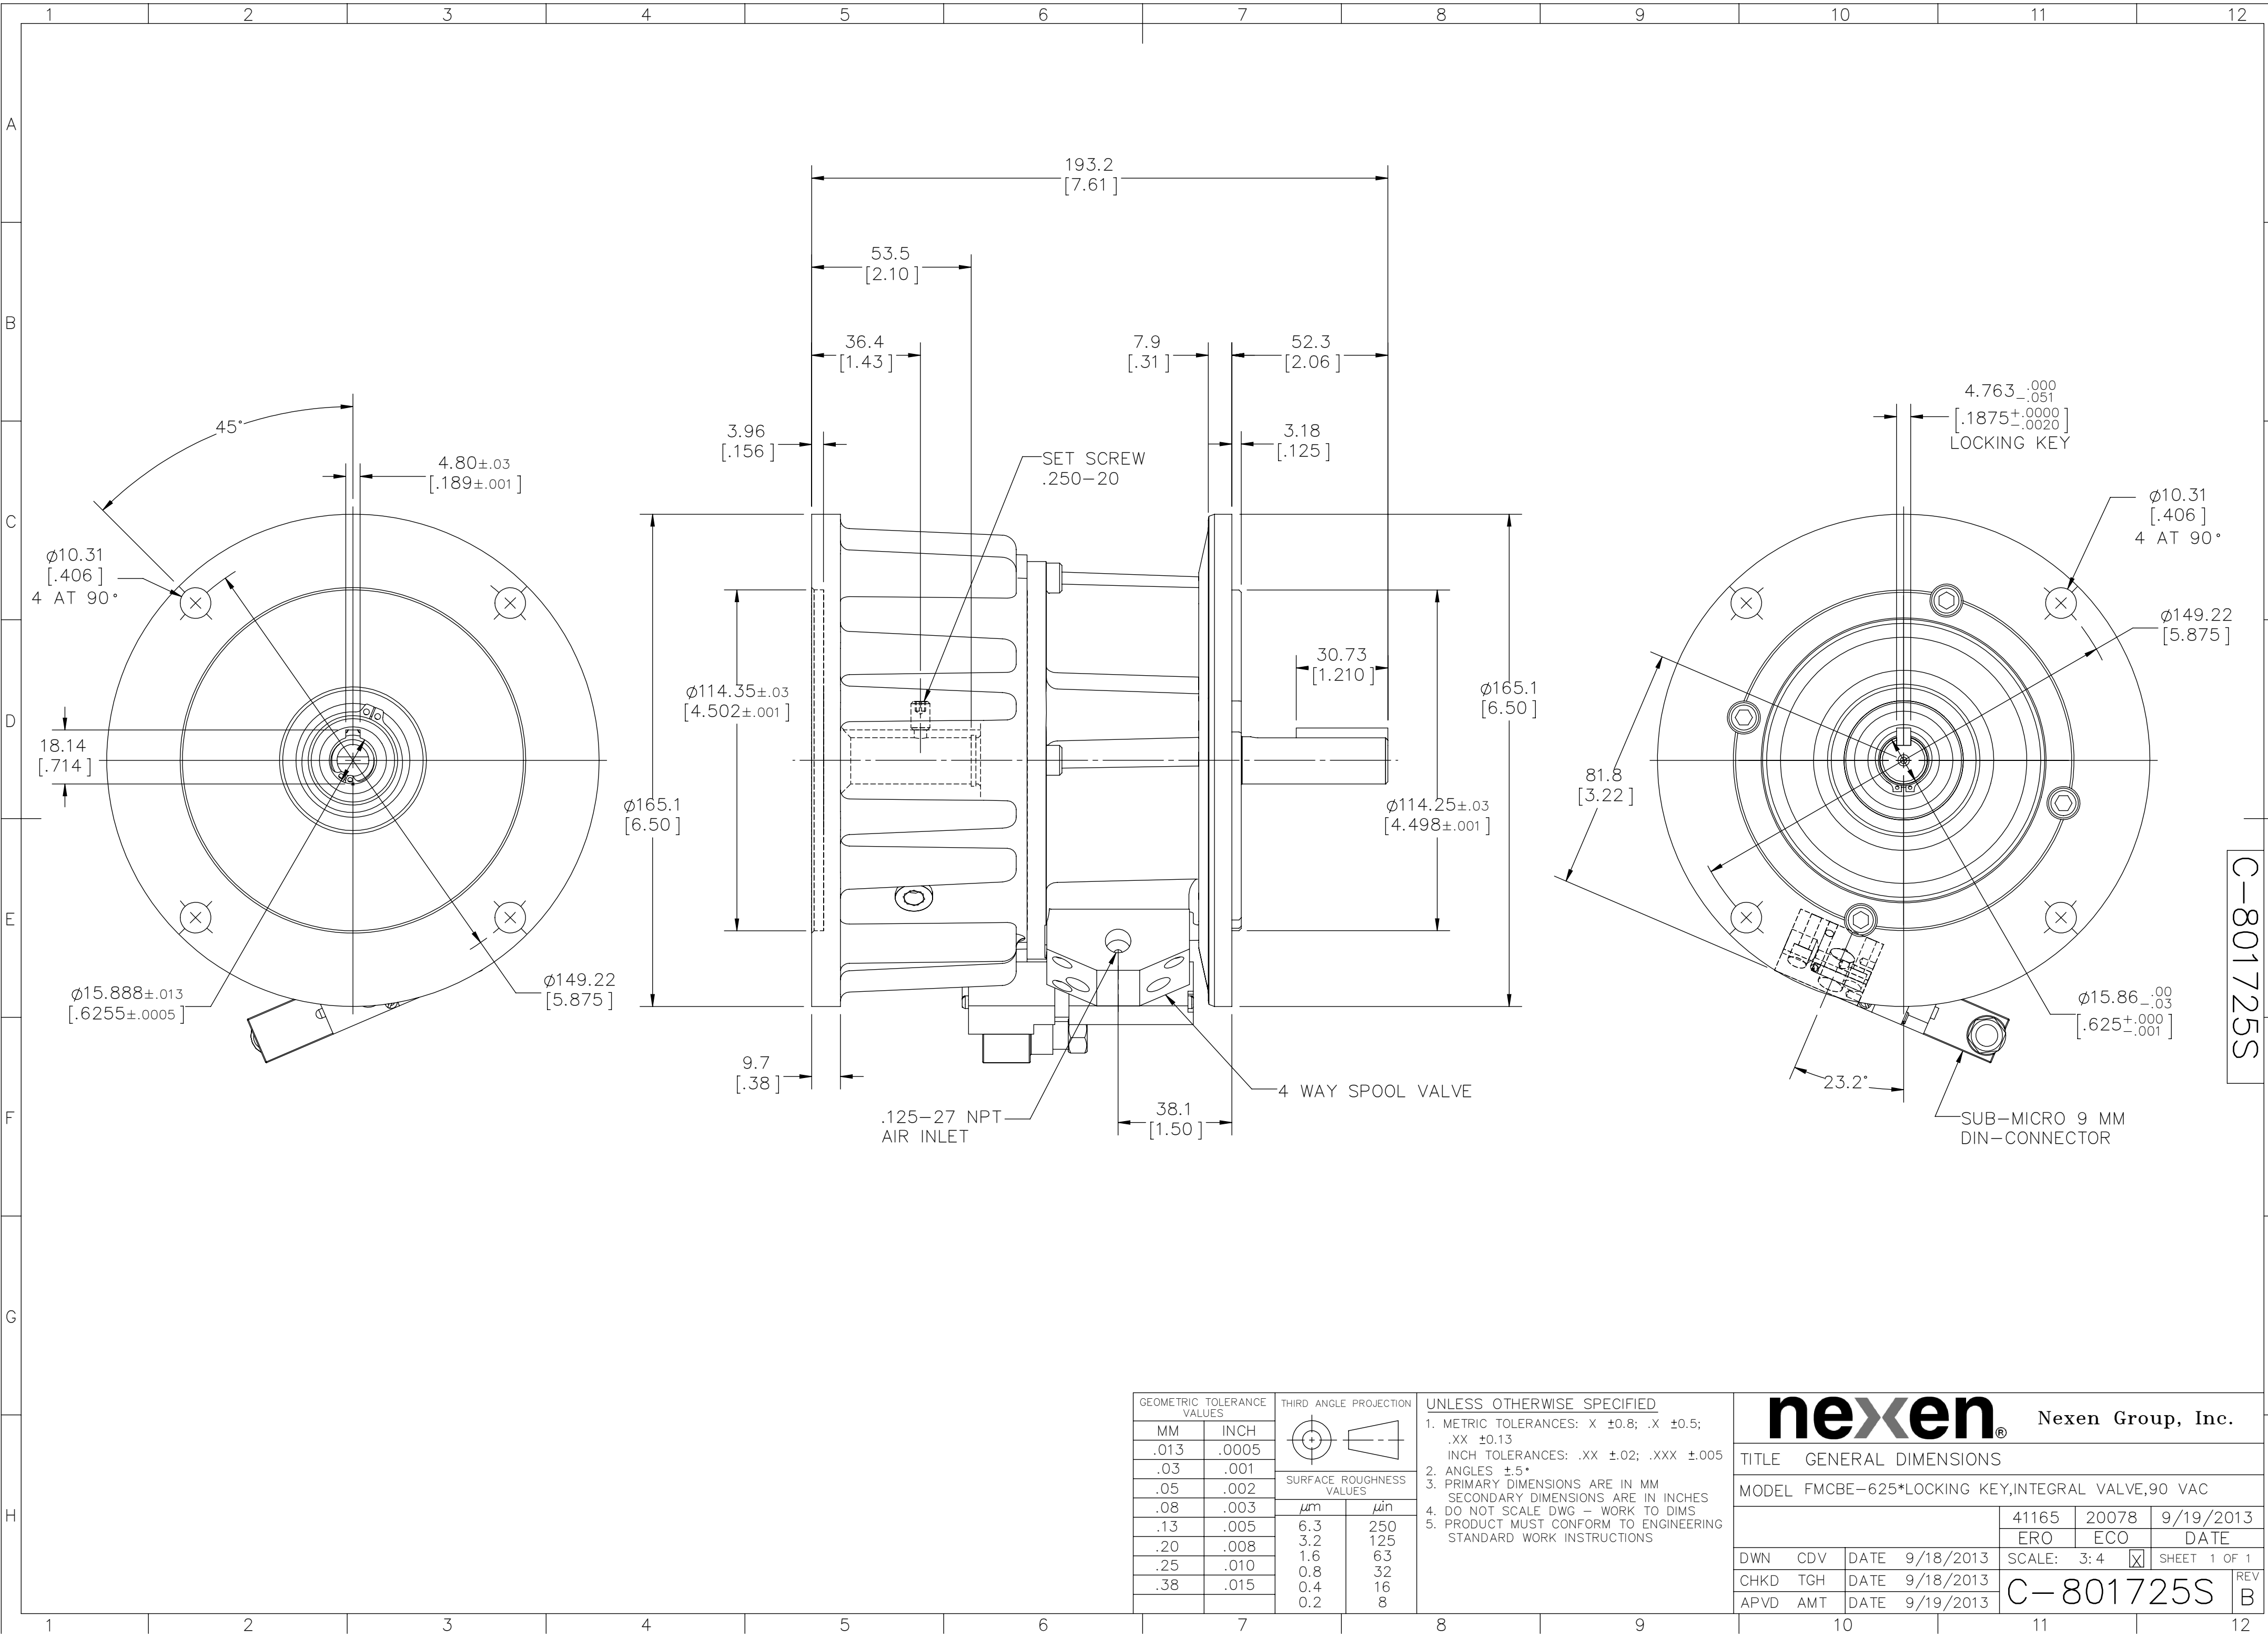




GEOMETRIC TOLERANCE VALUES		THIRD ANGLE PROJECTION															
MM	INCH																
.013	.0005	SURFACE ROUGHNESS VALUES <table><tr><th>μm</th><th>μin</th></tr><tr><td>6.3</td><td>250</td></tr><tr><td>3.2</td><td>125</td></tr><tr><td>1.6</td><td>63</td></tr><tr><td>0.8</td><td>32</td></tr><tr><td>0.4</td><td>16</td></tr><tr><td>0.2</td><td>8</td></tr></table>		μm	μin	6.3	250	3.2	125	1.6	63	0.8	32	0.4	16	0.2	8
μm	μin																
6.3	250																
3.2	125																
1.6	63																
0.8	32																
0.4	16																
0.2	8																
.03	.001																
.05	.002																
.08	.003																
.13	.005																
.20	.008																
.25	.010																
.38	.015																

UNLESS OTHERWISE SPECIFIED

1. METRIC TOLERANCES: X $\pm$ 0.8; .X $\pm$ 0.5; .XX $\pm$ 0.13
INCH TOLERANCES: .XX $\pm$ 0.02; .XXX $\pm$ 0.005

2. ANGLES $\pm$ 5°

3. PRIMARY DIMENSIONS ARE IN MM
SECONDARY DIMENSIONS ARE IN INCHES

4. DO NOT SCALE DWG - WORK TO DIMS

5. PRODUCT MUST CONFORM TO ENGINEERING STANDARD WORK INSTRUCTIONS



Nexen Group, Inc.

GENERAL DIMENSIONS

MODEL FMCBE-625*LOCKING KEY,INTEGRAL VALVE,90 VAC

41165

20078

9/19/2013

ERO

ECO

DATE

DWN

CDV

DATE 9/18/2013

CHKD

TGH

DATE 9/18/2013

APVD

AMT

DATE 9/19/2013

SCALE: 3:4

☒

SHEET 1 OF 1

REV

B

C-801725S