



# Global Cast Angle Valves

## Female Inlet



**Features:**

- NPT inlet thread only
- aluminum handwheel
- working pressure: **300 PSI** at 70°F (21°C)
- New York City Board of Standards and Appeals, approval # MEA 54-07-E
- available finishes:
  - cast (standard)
  - polished: -P
  - chrome: -C
- minimum quantity for special thread, consult Dixon™

Inlet Female NPT	Outlet	Cast Yellow DZR Brass Part #	Price/E
1½"	1½" male NST (NH)	<b>AV150-I</b>	<b>\$108.80</b>
2½"	2½" male NST (NH)	<b>AV250-I</b>	<b>222.00</b>
<b>NEW</b> 2½"	2½" MNYFD	<b>AV250NYFD-I</b>	<b>222.00</b>

## Grooved Inlet



Inlet Grooved	Outlet Male NST (NH)	Cast Yellow DZR Brass Part #	Price/E
2½"	2½"	<b>AVG250F-I</b>	<b>\$240.70</b>

Inlet Grooved	Outlet Female NPT	Cast Yellow DZR Brass Part #	Price/E
2½"	2½"	<b>AVGF250-I</b>	<b>\$240.70</b>

## Double Female


**Features:**

- NPT inlet and outlet only
- aluminum handwheel
- working pressure: **300 PSI** at 70°F (21°C)
- New York City Board of Standards and Appeals, approval # MEA 54-07-E
- available finish:
  - cast (standard)
  - polished = -P
  - chrome = -C



Inlet Female NPT	Outlet Female NPT	Cast Yellow DZR Brass Part #	Price/E
1½"	1½"	<b>AVF150-I</b>	<b>\$108.80</b>
2½"	2½"	<b>AVF250-I</b>	<b>222.00</b>

## Dimensions

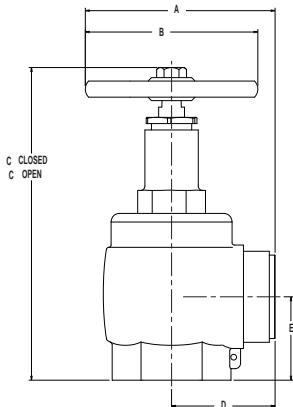

Size	A	B	C (closed)	C (open)	D	E	Wt. in Lbs.
1½"	4.13"	3.75"	6.80"	7.78"	2.25"	1.81"	4.4
2½"	5.69"	5.00"	9.00"	10.72"	3.19"	2.59"	9.5

P