



SELECTION/DIMENSIONS




TORQUE-ARM II Shaft Mount Speed Reducers

BELT GUARD DIMENSIONS TA0107L - TA5215H

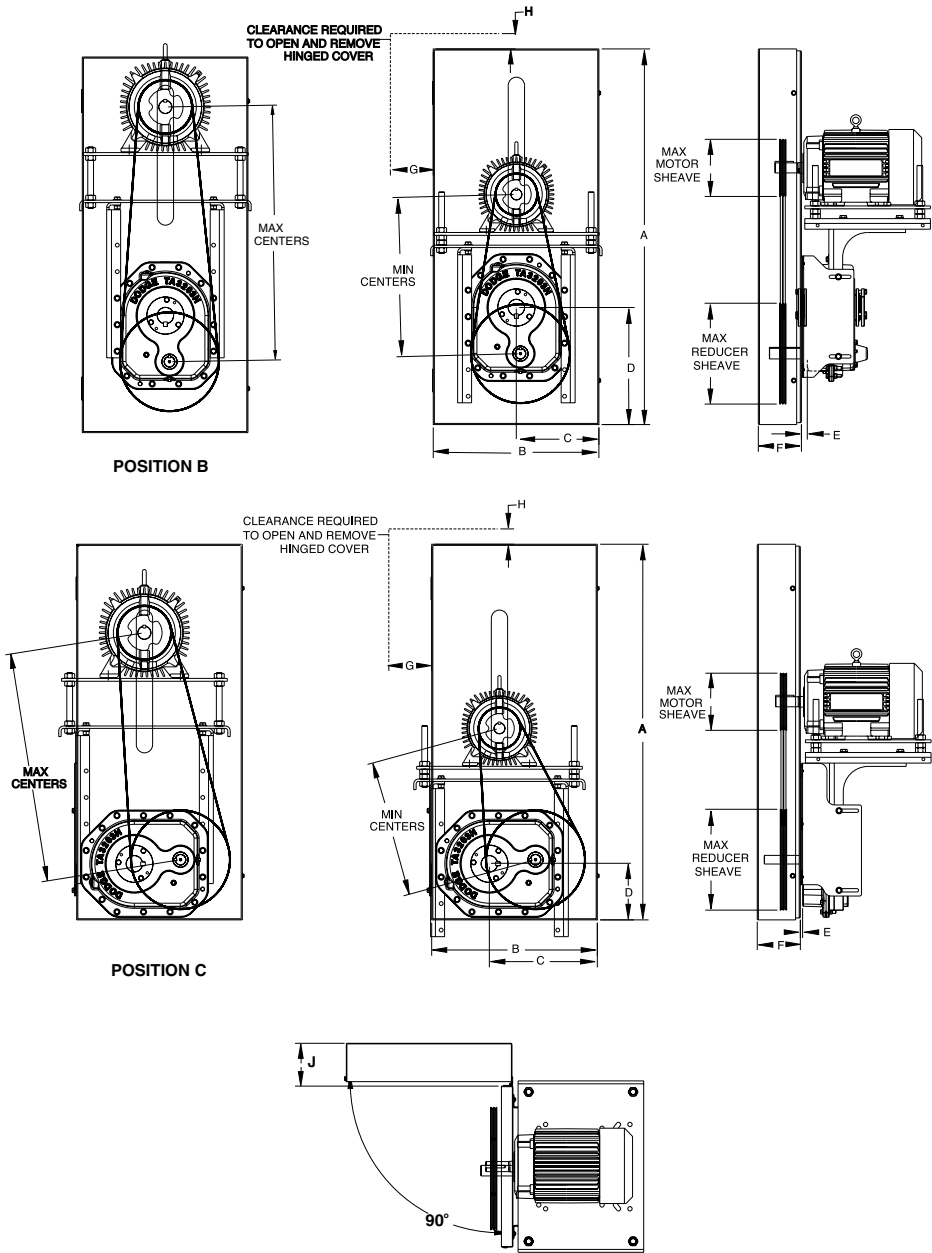

EASY SELECTION PAGE 9	SELECTION PAGE 12	RELATED PRODUCTS PAGE 123	ENGINEERING/TECHNICAL PAGE 129
--------------------------	----------------------	------------------------------	-----------------------------------



SELECTION/DIMENSIONS

TORQUE-ARM II Shaft Mount Speed Reducers

BELT GUARD DIMENSIONS, TA0107L - TA5215H

Case Size	Mounting Position	Centers		Max Sheave Dia.		A	B	C
		Min	Max	Motor	Reducer			
TA0107L	B	16.7	26.9	11.0	12.4	41.50	16.00	8.00
	C	14.4	25.5	11.4	12.3	41.50	16.00	10.43
TA1107H	B	16.0	28.0	10.8	12.8	41.50	16.00	8.00
	C	16.0	26.3	9.4	9.4	41.50	16.00	11.55
TA2115H	B	17.8	31.1	8.6	12.8	43.50	19.25	9.62
	C	16.8	28.9	9.3	12.3	43.50	19.25	13.07
TA3203H	B	18.9	34.3	9.2	16.8	49.00	21.60	10.80
	C	15.0	31.0	15.8	14.0	49.00	21.60	14.12
TA4207H	B	21.8	38.3	10.3	16.9	53.50	24.60	12.30
	C	22.4	35.5	16.5	15.9	53.50	24.60	16.11
TA5215H	B	25.7	44.1	11.8	17.8	60.50	27.60	13.80
	C	25.6	39.6	18.6	16.9	60.50	27.60	17.85

Case Size	Mounting Position	D	E		F	G	H	J
			Min	Max				
TA0107L	B	11.74	0.04	1.66	4.23	4.22	2.00	4.22
	C	7.33	0.04	1.66	4.23	4.22	2.00	4.22
TA1107H	B	11.74	0.00	1.57	4.23	4.22	2.00	4.22
	C	5.50	0.00	1.62	4.23	4.22	2.00	4.22
TA2115H	B	12.70	0.19	1.60	4.23	4.22	2.00	4.22
	C	7.00	0.19	1.56	4.23	4.22	2.00	4.22
TA3203H	B	15.27	0.04	2.54	5.62	5.59	2.00	5.59
	C	7.32	0.09	2.66	5.62	5.59	2.00	5.59
TA4207H	B	16.56	0.00	2.50	5.62	5.59	2.00	5.59
	C	8.32	0.13	2.70	5.62	5.59	2.00	5.59
TA5215H	B	18.25	0.00	2.44	6.37	6.09	2.00	6.09
	C	9.60	0.08	2.64	6.37	6.09	2.00	6.09

Notes:

1. Minimum centers allow 0.5" for belt assembly
2. Maximum sheave diameters allow 0.5" clearance for belt assembly
3. Range of center distances on belt guard may be less than the full range of center distances available on the motor mount
4. Belt guard cover is hinged on the left side
5. 2.00" head room required to lift belt guard cover off its hinge pins
6. Belt guard cover must be opened at least 90 degrees for removal
7. Belt guard attaches to motor mount brackets
8. "E" maximum dimension allows clearance for cooling fan