



PN Gold Mounted Ball Bearings

SEALMASTER®



Duty: Standard
Housing: High Strength Composite Two Bolt Flange
Self-Alignment: +/- 2 Degrees
Lock: Skwezloc Locking Collar
Seal: HPS
Temperature: 0° to 150°F
Grease: Sealmaster GoldPlex-FG

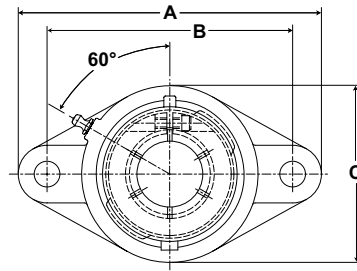

CRS Bearings

CRFTC-PN-T Series 2 Bolt Flange Skwezloc Locking Collar

Bore Diameter		Part No.	Bearing Insert No.	Basic Dynamic Rating lb/N	Dimensions inch/mm												Unit Wt. lb/kg	Open Cap	Closed Cap	Backside Shield
					A	B	C	D	G	H	J	L	N	P	T	Bolt Size				
3/4	-	CRFTC-PN12T	PN-12T	2611 11614	4 15/32	3 17/32	2 7/16	31/32	7/16	1 9/32	1 7/32	1 3/4	1/2	2 13/64	2	3/8	.70	ECO-12	ECC-12	2BSS-12
-	20	CRFTC-PN204T	PN-204T		113.5	89.7	61.9	24.6	11.1	32.5	31.0	44.5	12.7	56.0	50.8		.32			
1	-	CRFTC-PN16T	PN-16T	2801 12459	4 15/16	3 57/64	2 23/32	1 5/64	17/32	1 7/16	1 3/8	1 15/16	9/16	2 23/64	2 3/16	7/16	.83	ECO-16	ECC-16	2BSS-16
-	25	CRFTC-PN205T	PN-205T		125.4	98.8	69.1	27.4	13.5	36.5	34.9	49.2	14.3	59.9	55.6		.38			
1 3/16	-	CRFTC-PN19T	PN-19T	4381 19488	5 11/16	4 19/32	3 1/4	1 7/32	17/32	1 9/16	1 1/2	2 3/16	5/8	2 31/64	2 9/16	7/16	1.97	ECO-19	ECC-19	2BSS-19
1 1/4	-	CRFTC-PN20RT	PN-20RT															ECO-20R		2BSS-20R
-	30	CRFTC-PN206T	PN-206T															ECO-19		2BSS-19
1 1/4	-	CRFTC-PN20T	PN-20T	5782 25720	6 21/64	5 1/8	3 45/64	1 11/32	9/16	1 3/4	1 11/16	2 7/16	11/16	2 43/64	2 15/16	1/2	1.97	ECO-20	ECC-23	2BSS-20
				160.7	130.2	94.1	34.1	14.3	44.5	42.9	61.9	17.5	67.9	74.6	.89					
1 3/8	-	CRFTC-PN22T	PN-22T	5782 25720	6 21/64	5 1/8	3 45/64	1 11/32	9/16	1 3/4	1 11/16	2 9/16	11/16	2 43/64	2 15/16	1/2	1.97	ECO-23	ECC-23	2BSS-22
1 7/16	-	CRFTC-PN23T	PN-23T																	2BSS-23
-	35	CRFTC-PN207T	PN-207T																	2BSS-22
1 1/2	-	CRFTC-PN24T	PN-24T	7340	6 29/32	5 21/32	4 7/64	1 1/2	9/16	2 1/64	1 15/16	2 11/16	3/4	2 15/16	3 19/64	1/2	2.50	ECO-24	ECC-24	2BSS-24
-	40	CRFTC-PN208T	PN-208T	32650	175.4	143.7	104.4	38.1	14.3	51.2	49.2	68.3	19.1	74.6	83.7		1.13			2BSS-208

Metric dimensions for reference only.

Not all parts are available from stock. Please contact customer service for availability (800) 626-2120.

For more information on bearing capabilities outside of our standard offering, please contact Application Engineering (800) 626-2093.