
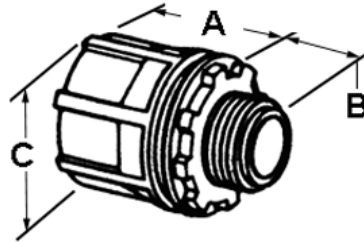


Zinc - Threaded

Images



Application

To secure threaded rigid service entrance conduit to box or enclosure. Insulated throat rated 105 degree c. UL listed Type 4 - Watertight. Suitable for Aluminum and Steel Rigid Conduit.

Product Information

Material: Zinc Die Cast

Finish: Ball burnished, mirror smooth

Certifications & Codes:

CSA File Number:	LR39354
Federal Specification Number:	A-A-50553
NEMA Standard:	FB-1
UL File Number:	E9391
UL Standard:	UL-514B
UNSPSC:	39121311

[Download Photo Image](#) [Download Dimensional Image](#)

Dimension A in Inches: 1-1/4

Dimension B in Inches: 13/16

Dimension C in Inches: 2-3/16

Catalog ID: 155-DC

UPC Number: 781747091550

Description: Threaded Hub, Zinc Die Cast, Size 1 1/2 Inch

Application: To secure threaded rigid service entrance conduit to box or enclosure. Insulated throat rated 105 degree c. UL listed Type 4 - Watertight. Suitable for Aluminum and Steel Rigid Conduit.

Trade Size: 1-1/2"

Std Pkg Qty: 20

Unit Qty: 2