BALDOR • RELIANCE

Customer information packet

CPX25166T

10HP, 1180//980RPM, 3PH, 60HZ, 256TY, XPFC, F1
Class - CLI GP C,D; CLII GP E,F,G
Division - Division I

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
4/7/2025 9:11:28 AM

Specifications

Enclosure	XPFC
Frame	256TY
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP C,D; CLII GP E,F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	10.000 HP @ 60 HZ
	7.500 HP @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	380.0 V @ 50 HZ
	230.0 V @ 60 HZ
	460.0 V @ 60 HZ
	190.0 V @ 50 HZ
Agency Approvals	CSA EEV
	UL
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	30.400 A @ 208.0 V
	30.000 A @ 230.0 V
	28.000 A @ 190.0 V
	15.000 A @ 460.0 V
	14.000 A @ 380.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT

Part detail

Revision	L
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	09WGZ383
Layout	09LYM363
Eff. date	05-02-2024
CD Diagram	CD0005
Poles	06
Leads	9#12
Proprietary	False
Created date	04-25-2019

Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	14.0 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	IP55
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	1800 rpm
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0956M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	25.75 IN
Power Factor	70
Product Family	Chemical Process Features
Pulley Face Code	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	1.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1180 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat

Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2033XPSLEV											
NO.					**CC**	010A					
S/N					**TEMP CODE**	T3C					
SPEC.	09-0000-1358				**INV.TYPE**	PWM					
CAT.NO.	CPX25166T				**C HP FR**	60	**C HP TO**	90			
HP	10//7.5				**CT HZ FROM**	6			**CT HZ TO**	60	
VOLTS	230/460//190/380				**VT HZ FROM**	6			**VT HZ TO**	60	
AMPS	30/15//28/14			**MAG CUR**	15.8/7.9						
RPM	1180//980			**MX RPM**	1800						
HZ	60//50	**PH**	3	**CL**	F	**NOM.EFF.**	91				
SER.F.	1.00	**DES**	A	**SL HZ**	1	**WK2**	4.5				
FRAME	256TY	**RATING**	40C AMB-CONT								
BLANK	55C AMB @ 1.00 SF, 60C RISE										
	1.15SF ON SINEWAVE				NEMA MG-1 PT.5,IP55						

AC Induction Motor Performance Data
Record # 73723
Typical performance - not guaranteed values

Winding: 09WGZ383-R006	**Type:** 0956M	**Enclosure:** XPFC

Nameplate Data			
Rated Output (HP)			10
Volts			230/460
Full Load Amps			29.2/14.6
R.P.M.			1180
Hz	60	**Phase**	3
NEMA Design Code	A	**KVA Code**	J
Service Factor (S.F.)			1
NEMA Nom. Eff.	91	**Power Factor**	70
Rating - Duty			40C AMB-CONT
S.F. Amps			

460 V, 60 Hz: High Voltage Connection	
Full Load Torque	44.4 LB-FT
Start Configuration	direct on line
Breakdown Torque	146 LB-FT
Pull-up Torque	53.6 LB-FT
Locked-rotor Torque	73.6 LB-FT
Starting Current	95.3 A
No-load Current	7.9 A
Line-line Res. @ 25ºC	0.659 Ω
Temp. Rise @ Rated Load	45°C
Temp. Rise @ S.F. Load	53°C
Locked-rotor Power Factor	24.2
Rotor inertia	4.5 LB-FT2

Load Characteristics 460 V, 60 Hz, 10 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**
Power Factor	32	52	63	70	72	73
Efficiency	83.6	89.7	91.3	91.5	91.1	90.3
Speed	1196	1191	1186	1182	1176	1169
Line amperes	8.74	10.1	12.2	14.7	17.7	21


ABB Motors and Mechanical Inc.

WINDING # 09WGZ383

10 HP 3 PH 60 HZ 1180 RPM 460 V 0956M

Typical performance - not guaranteed values.

TORQUES(LB-FT): PO=146 PU=53.6 LR=73.6 LRA=95.3

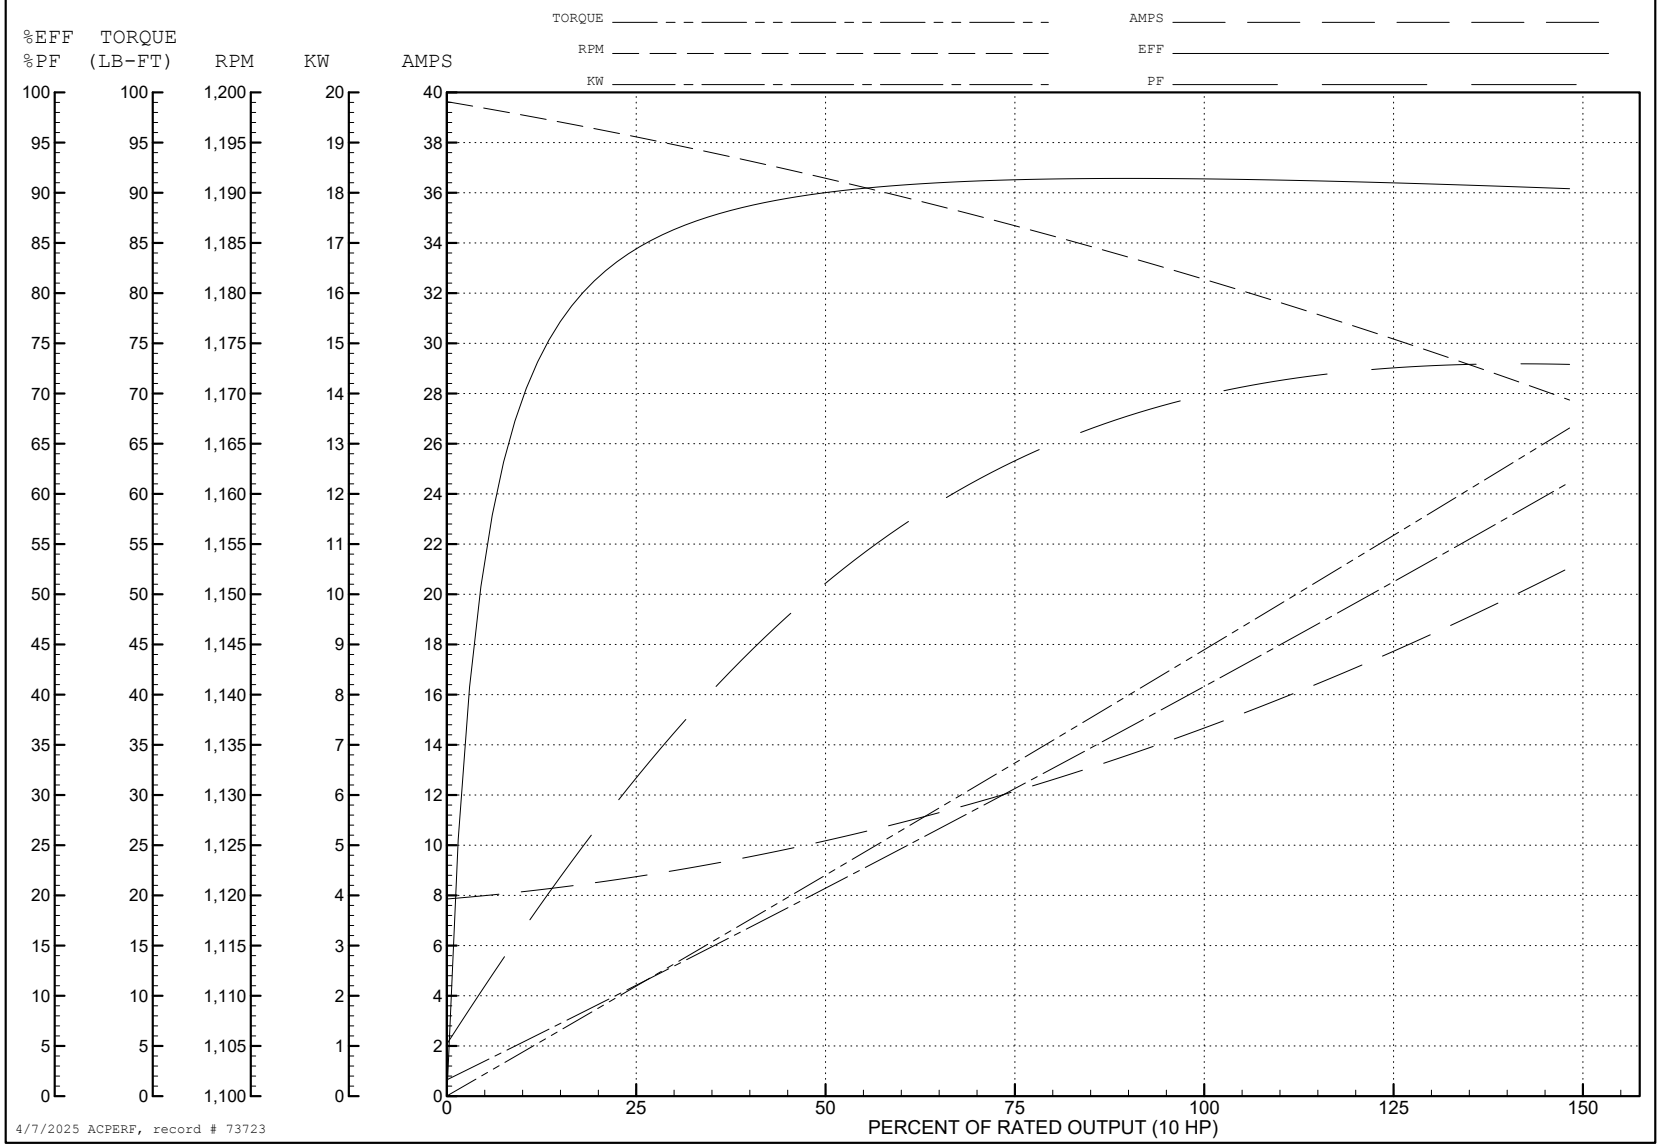

AC Induction Motor Performance Data
Record # 75809
Typical performance - not guaranteed values

Winding: 09WGZ383-R004	**Type:** 0956M	**Enclosure:** XPFC

Nameplate Data				**380 V, 50 Hz: High Voltage Connection**	
Rated Output (HP)			10//7.5	**Full Load Torque**	40.04 LB-FT
Volts			230/460//190/380	**Start Configuration**	direct on line
Full Load Amps			30/15//28/14	**Breakdown Torque**	141 LB-FT
R.P.M.			1180//980	**Pull-up Torque**	56.44 LB-FT
Hz	60//50	**Phase**	3	**Locked-rotor Torque**	77.49 LB-FT
NEMA Design Code	A	**KVA Code**	J	**Starting Current**	93.43 A
Service Factor (S.F.)			1	**No-load Current**	7.77 A
NEMA Nom. Eff.	91	**Power Factor**	70	**Line-line Res. @ 25ºC**	0.659 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	40°C
S.F. Amps				**Temp. Rise @ S.F. Load**	48°C
				Locked-rotor Power Factor	27.1
				Rotor inertia	4.5 LB-FT2

Load Characteristics 380 V, 50 Hz, 7.5 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**
Power Factor	31	50	61	68	71	73
Efficiency	83	89.2	90.8	91.1	90.6	89.7
Speed	996	992	987	984	978	972
Line amperes	8.53	9.7	11.52	13.72	16.39	19.29


ABB Motors and Mechanical Inc.


WINDING # 09WGZ383

7.5 HP 3 PH 50 HZ 984 RPM 380 V 0956M


Typical performance - not guaranteed values.


TORQUES(LB-FT): PO=141 PU=56.44 LR=77.49 LRA=93.43

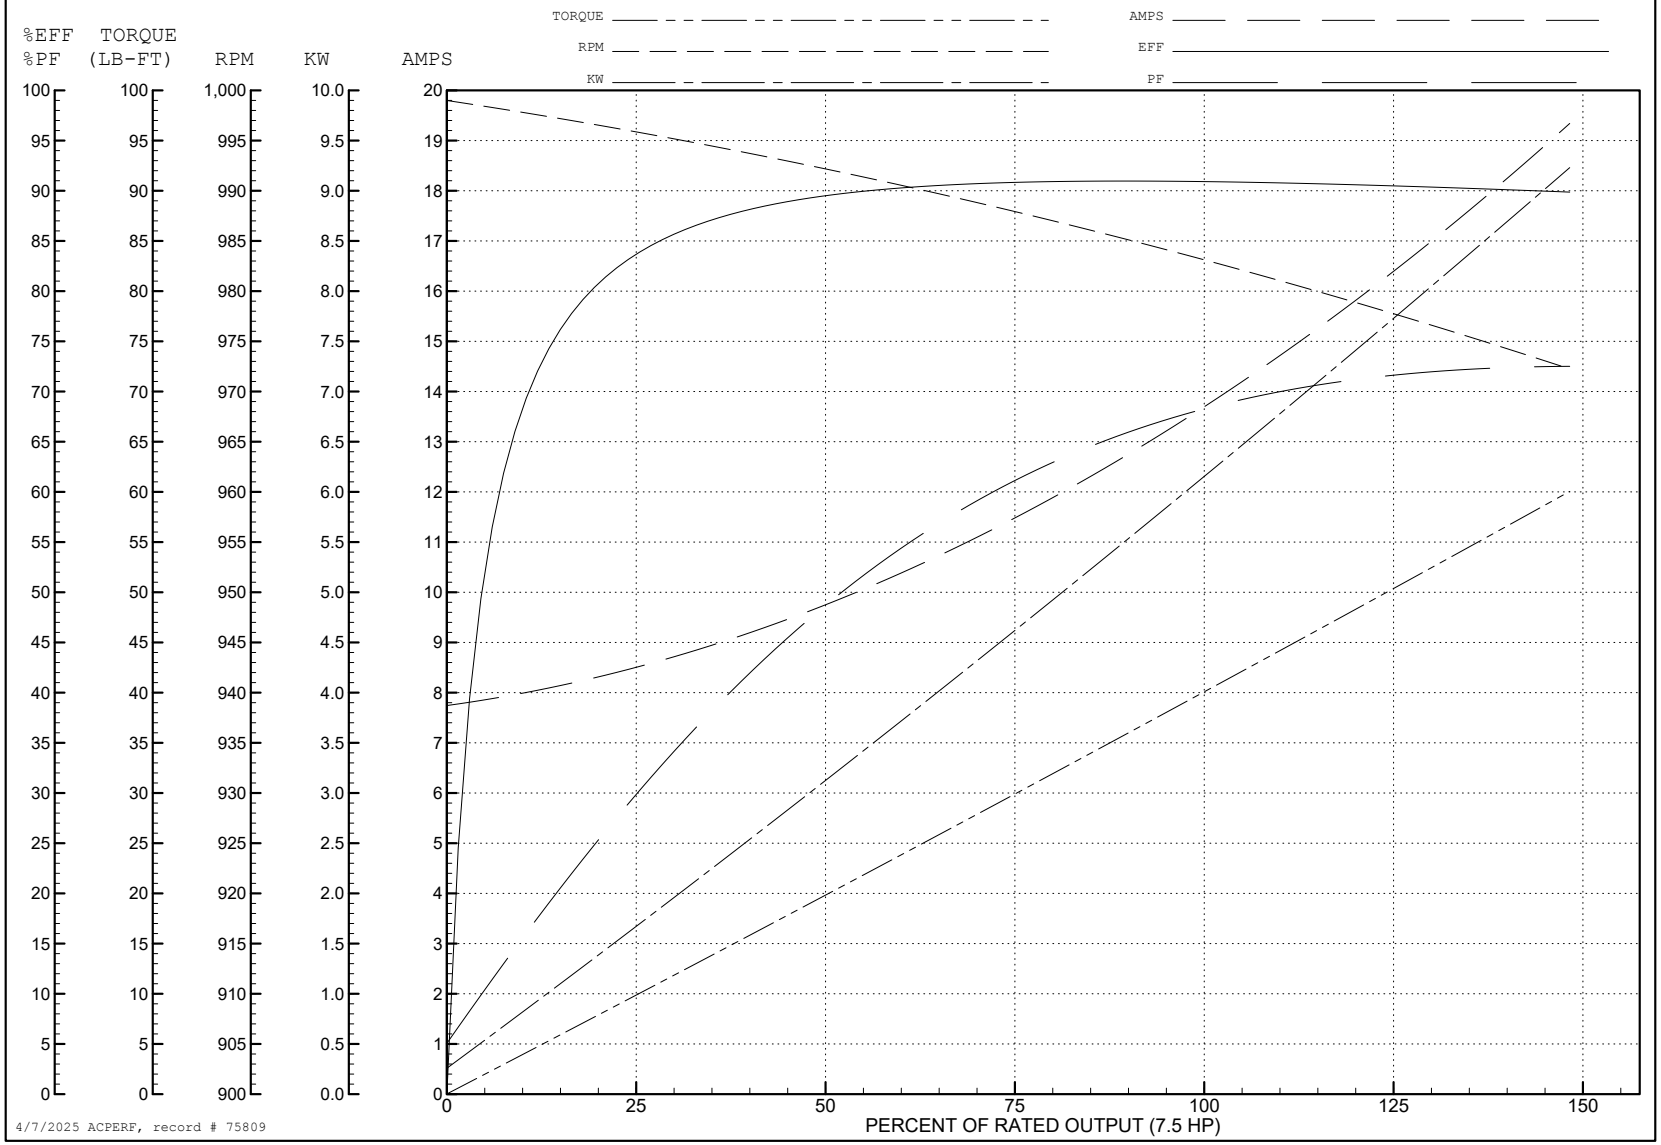


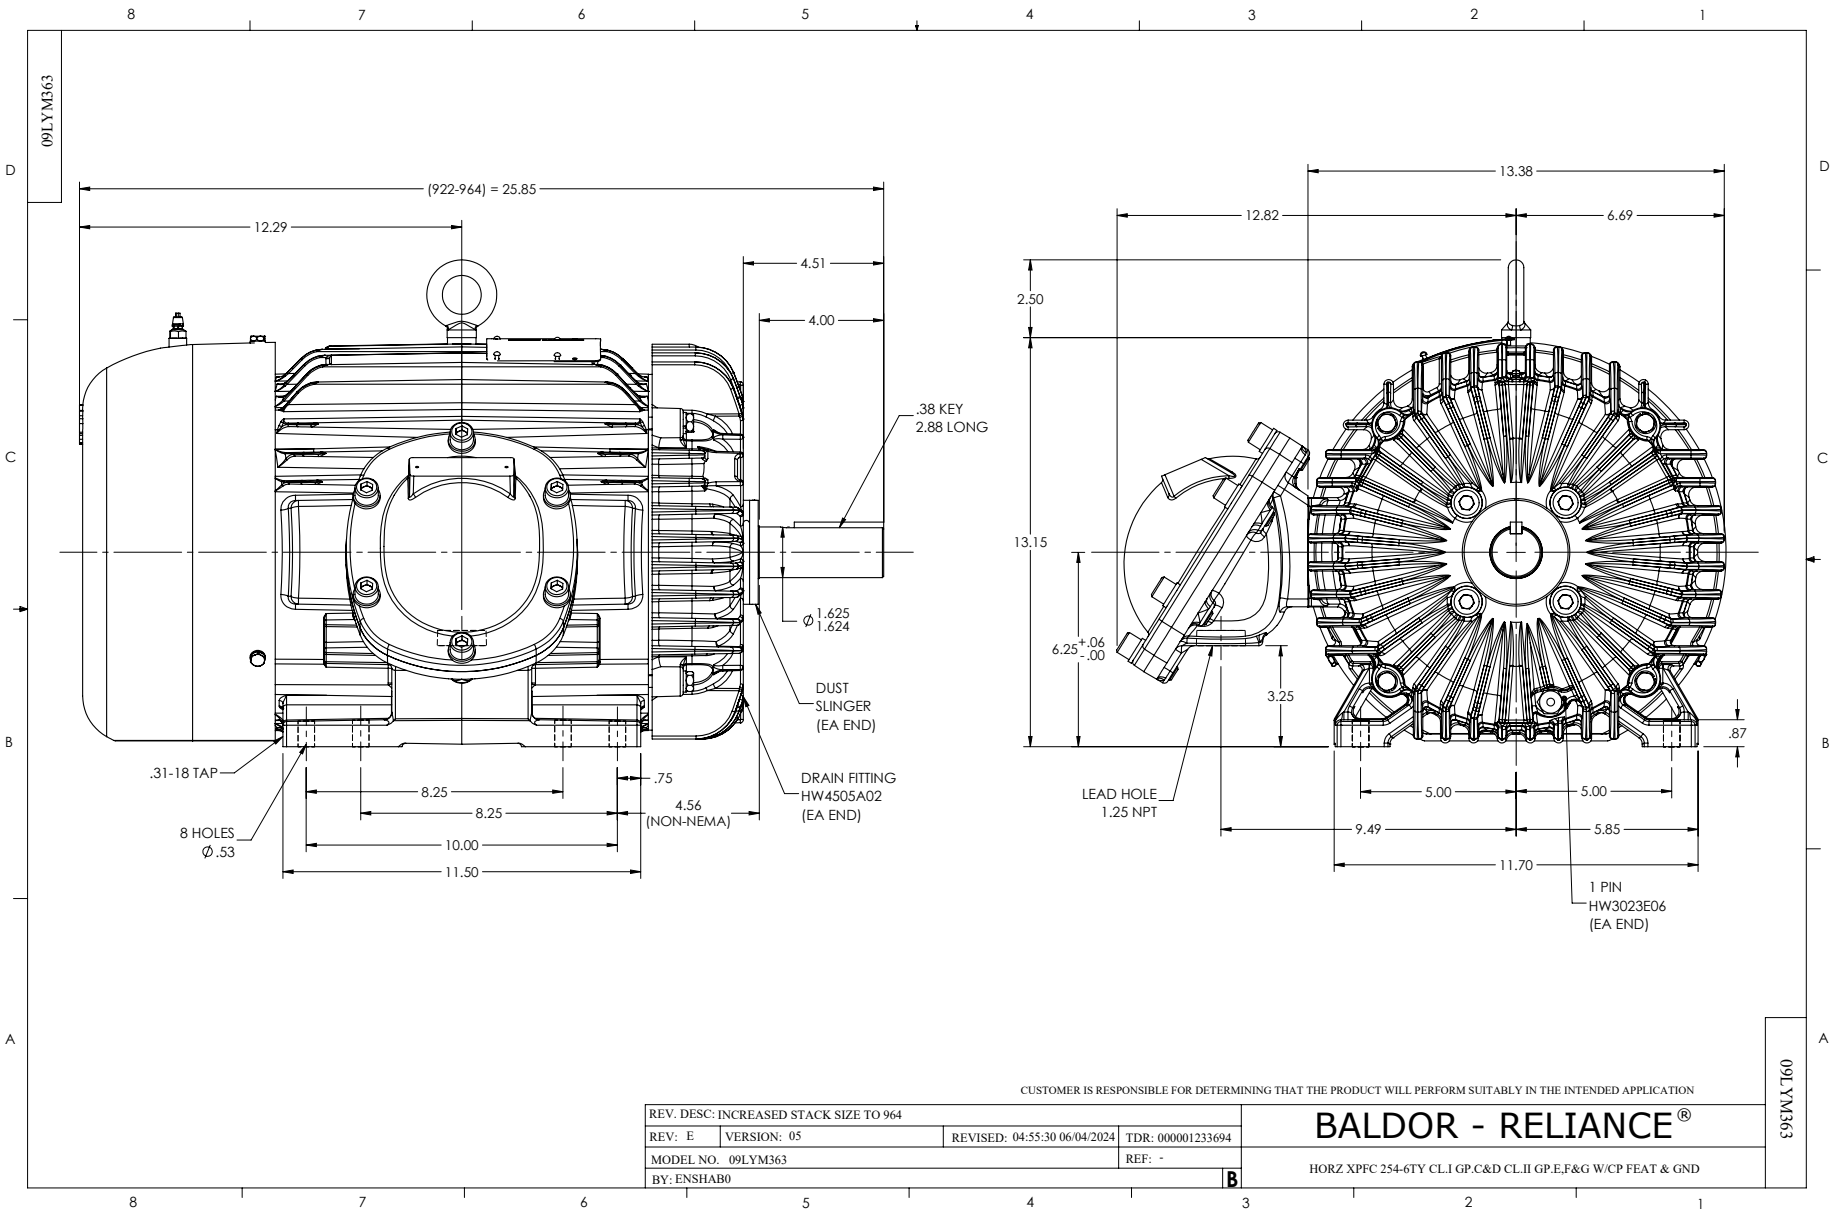
09LYM363
(922-964) = 25.85
12.29
4.51
4.00
.38 KEY
2.88 LONG
Ø 1.625
1.624
DUST
SLINGER
(EA END)
DRAIN FITTING
HW4505A02
(EA END)
.31-18 TAP
8 HOLES
Ø .53
.75
8.25
8.25
10.00
11.50
4.56
(NON-NEMA)
13.38
12.82
6.69
2.50
13.15
6.25 +.06 -.00
3.25
.87
LEAD HOLE
1.25 NPT
5.00
5.00
9.49
5.85
11.70
1 PIN
HW3023E06
(EA END)
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: INCREASED STACK SIZE TO 964
REV: E
VERSION: 05
REVISED: 04:55:30 06/04/2024
TDR: 000001233694
MODEL NO. 09LYM363
REF: -
BY: ENSHAB0
B
BALDOR - RELIANCE®
HORZ XPFC 254-6TY CL.I GP.C&D CL.II GP.E,F&G W/CP FEAT & GND
09LYM363

CD0005

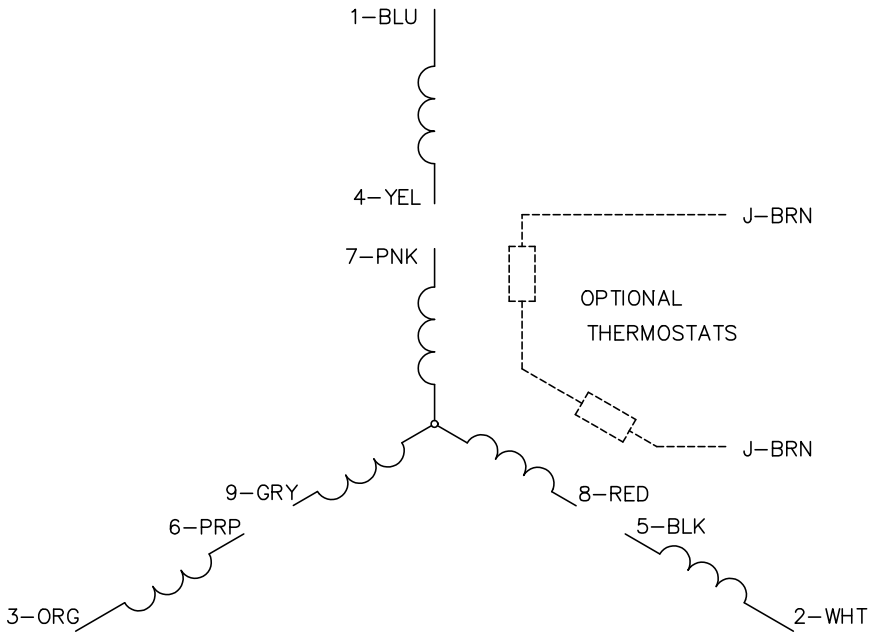

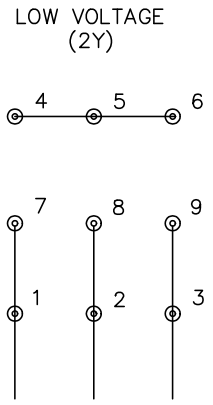

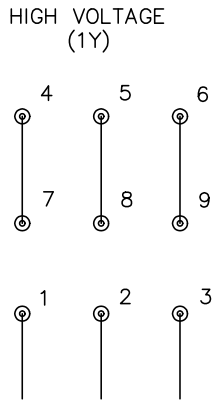

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS