



Customer information packet

ECS101M0K3ED4

3KW, 1500RPM, 3PH, 50HZ, D112D, 3632B, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	D112D
Frame Material	Steel
Frequency	50.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Brushless Wound Field PM Rotor
Output @ Frequency	3.000 KW @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1500 RPM @ 50 HZ
Voltage @ Frequency	190.0 V @ 50 HZ 380.0 V @ 50 HZ
Agency Approvals	CE CULUS WEEE
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	5
Current @ Voltage	10.600 A @ 190.0 V 5.300 A @ 380.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	S1
Efficiency @ 100% Load	92.4 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Frame Prefix	D
Heater Indicator	No Heater

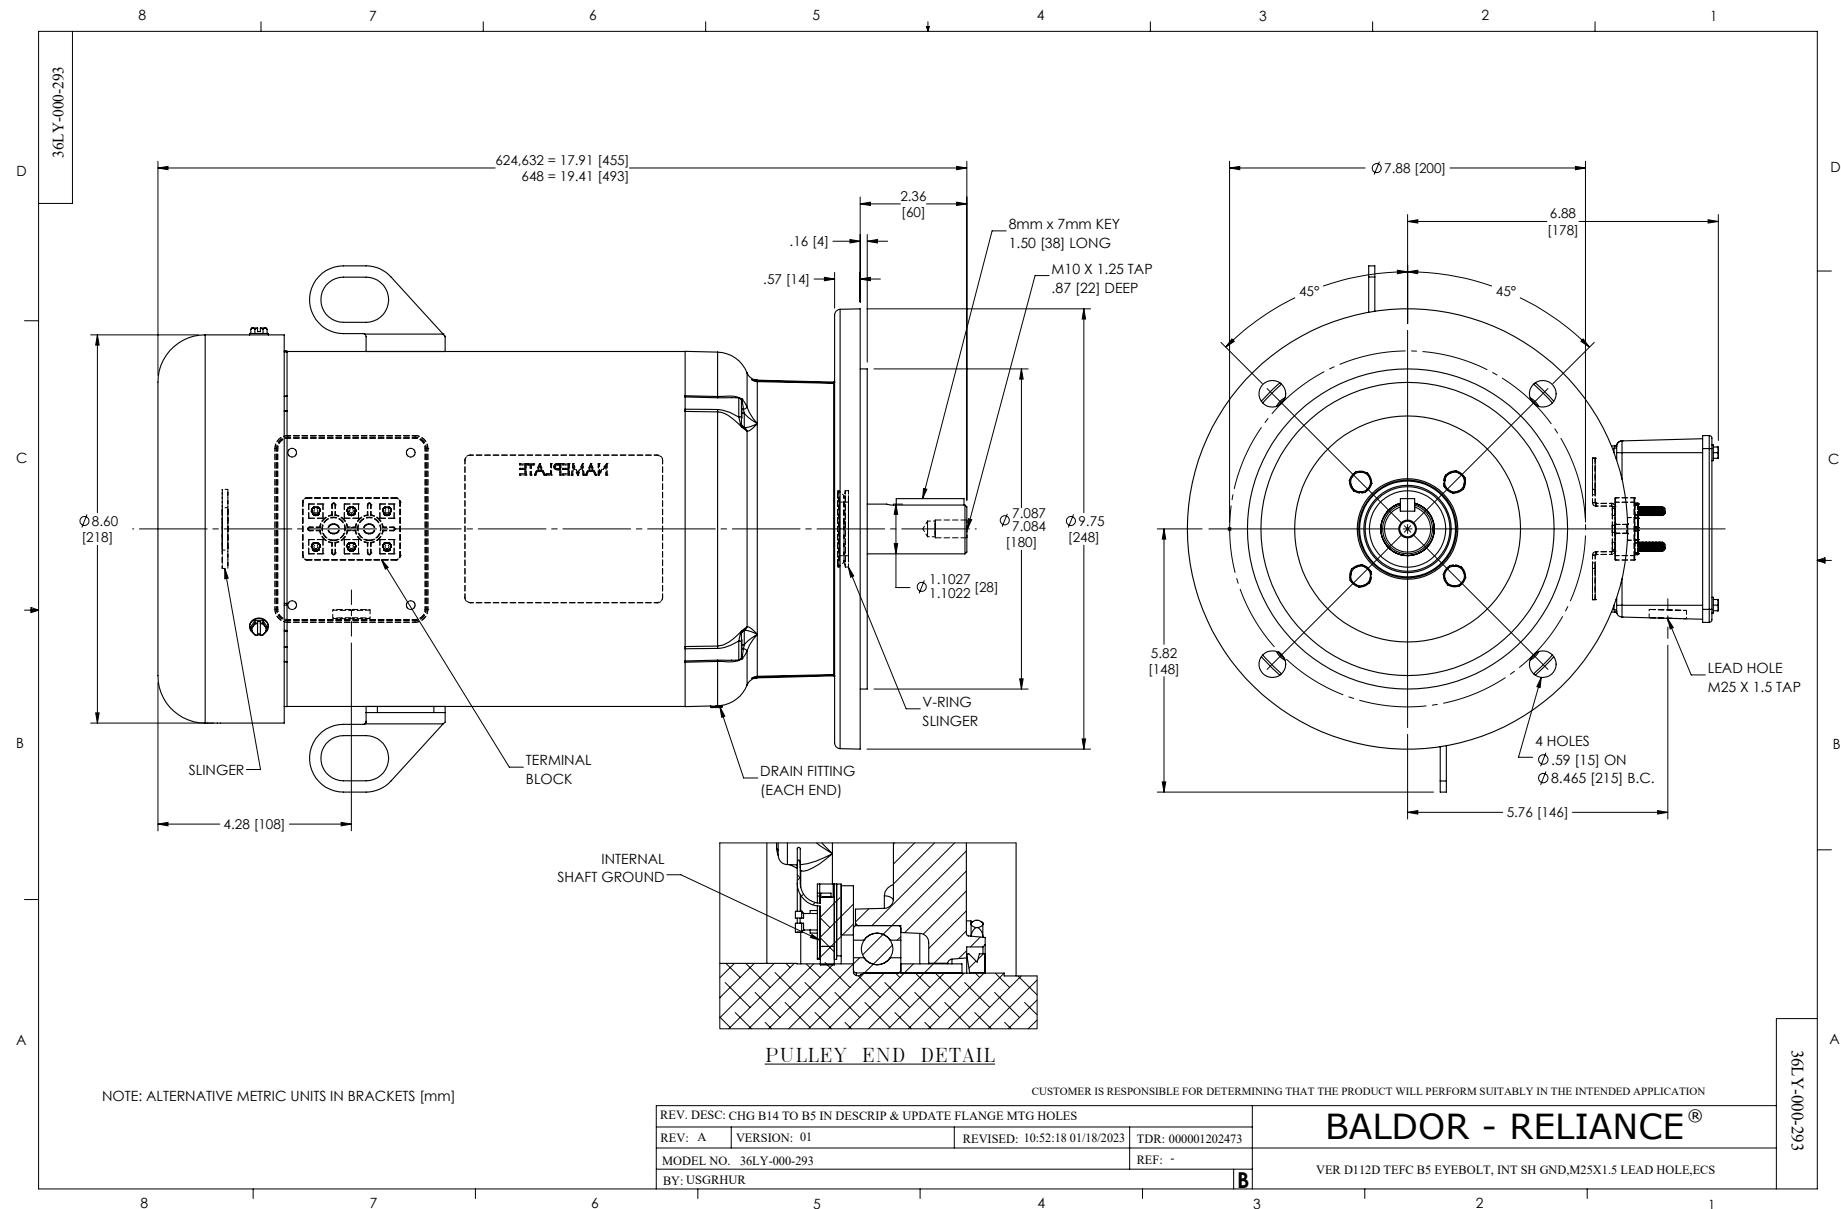
Part detail

Revision	G
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	36WGA0020
Layout	36LY-000-293
Eff. date	05-08-2024
CD Diagram	CD0005A25
Poles	04
Leads	9#12
Proprietary	False
Created date	10-13-2022

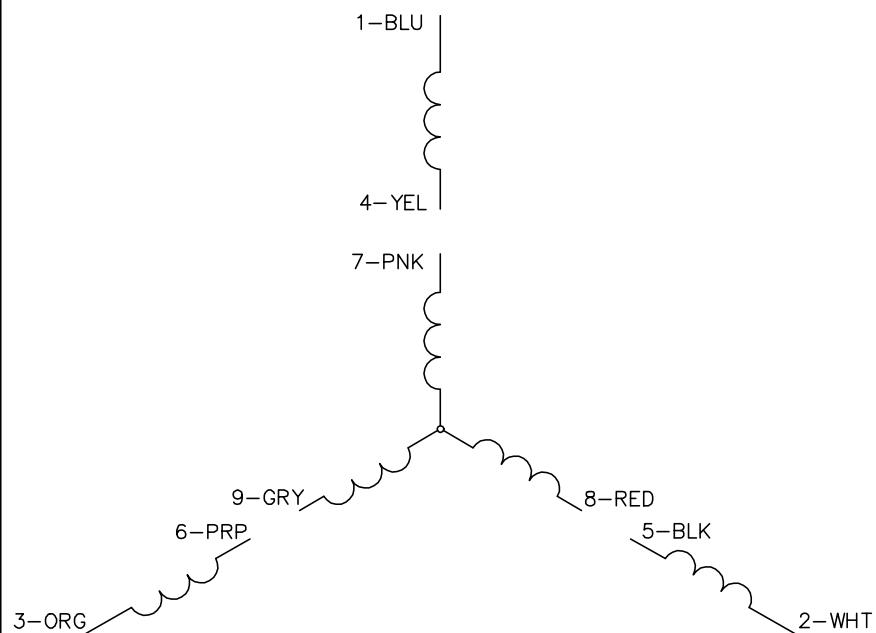


High Voltage Full Load Amps	5.3 a
Insulation Class	F
Inverter Code	Inverter Duty
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	IEC
Motor Type	3632B
Mounting Arrangement	F1
Number of Poles	4
Overall Length	17.91 IN
Power Factor	97
Product Family	General Purpose
Pulley Face Code	D-Flange
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	1.103 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Speed	1500 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3968B01A01											
CAT.NO.	ECS101MOK3ED4										
SPEC.	36-0000-3635					YR					
FRAME	D112D		IP	55	WT.	45					
KW	3	HZ	50	PH	3	DUTY-IPM	S1				
INS CL	F	CLASS RISE			B	AMB-C	40				
EFF. CL	IE5	EFF	92.4		COSØ	97					
VOLTS	190/380		FLA	10.6/5.3							
1/MIN	1500			1/MIN MAX			3000				
BEMF (V)	105/210			RS (OHMS)			0.82/3.30				
LD (MH)	13.5/54.0			LQ (MH)			47.8/191.0				
VPWM	CP =	50	TO		100						
CT	5	TO	50	VT	1	TO	50				
MATCHED INV											
DE	6206		ODE	6205							
SERIAL #											




CD0005A25

LOW VOLTAGE
(2Y)

U V W

INVERTER

HIGH VOLTAGE
(1Y)

U V W

INVERTER

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: NEW

REV. LTR: -

VERSION: 00

TDR: 000001135746

FILE: \AAA\00253\082

REVISED: 01:10:57 03/30/2020

BY: ENMARSO

MTL: -



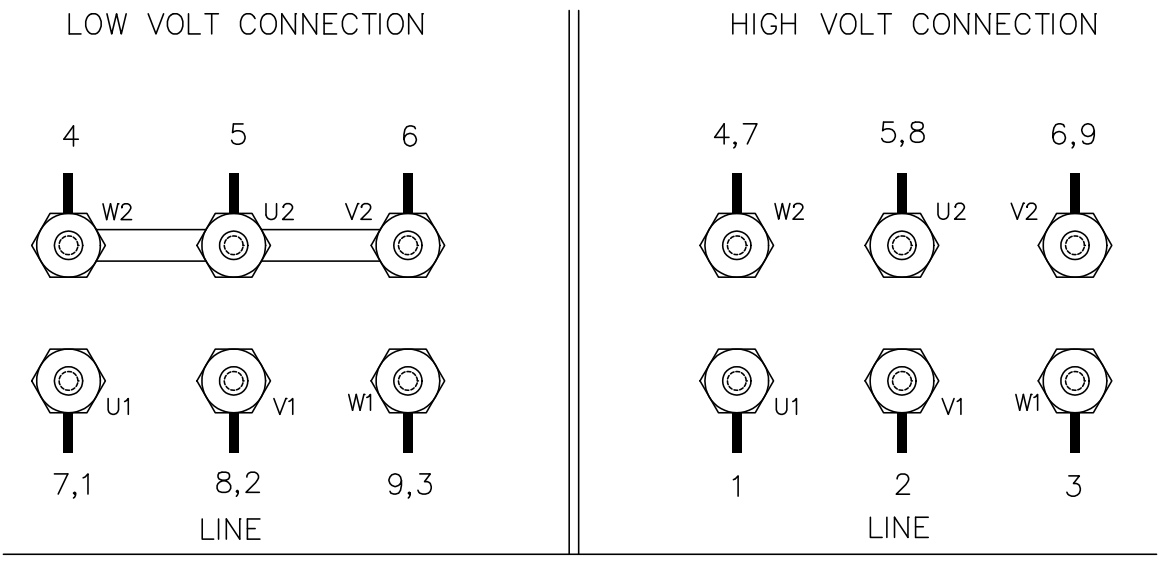
BALDOR - RELIANCE®

3PH, DV, 9 LEADS, ECS

SH 1 of 1

CD0005A25

SP0032



TO REVERSE ROTATION
INTERCHANGE ANY TWO
LINE LEADS.

MATL:			
REV:	A	ADD CONN LABEL REF TO DESC	
SP0032		SCALE: -	BY: JLP
		FILE: AAA00029378	REVISED: 12/17/96
		TDR: 0111436	

BALDOR ELECTRIC Co.

THREE PHASE, DUAL VOLTAGE, TERMINAL BLOCK, CD0005/LC0005C01

SP0032